

CRE, CRIE, CRNE

Vertical multistage centrifugal E-pumps

50/60 Hz



1. Product introduction	4
Performance range	5
Minimum efficiency index.....	6
Applications	6
Product range	7
Pump	9
Motor	9
Terminal box positions.....	12
Ambient temperature	12
Installation altitude	12
2. Control of E-pumps	13
Examples of E-pump applications	13
Control options.....	14
Control modes for E-pumps	15
3. Construction	17
CRE 1, 3, 5, 10, 15 and 20	17
CRIE, CRNE 1, 3, 5, 10, 15 and 20.....	17
CRE 32, 45, 64 and 90	18
CRNE 32, 45, 64 and 90	18
CRE 120 and 150	19
CRNE 120 and 150	19
4. Type key	20
5. Operating and inlet pressures	21
Maximum operating pressure and liquid temperature	21
Operating range of the shaft seal.....	22
Maximum inlet pressure.....	22
6. Selection and sizing	24
Selection of pumps	24
How to read the curve charts.....	28
Guidelines to performance curves.....	28
7. Performance curves and technical data	29
CRE 1	29
CRIE, CRNE 1	31
CRE 3	33
CRIE, CRNE 3	35
CRE 5	37
CRIE, CRNE 5	39
CRE 10	41
CRE, CRIE, CRNE 10	43
CRE 15	45
CRIE, CRNE 15	47
CRE 20	49
CRIE, CRNE 20	51
CRE 32	53
CRNE 32	55
CRE 45	57
CRNE 45	59
CRE 64	61
CRNE 64	63
CRE 90	65
CRNE 90	67
CRE 120	69
CRNE 120	71
CRE 150	73
CRNE 150	75

8. Motor data	77
9. Pumped liquids	78
10. Accessories	81
Pipe connection	81
Adapter kit	81
Potentiometer	88
EMC filter	88
LiqTec	88
Sensors	89
Control MPC	91
Remote controls	91
Grundfos GO Remote	91
CIU communication interface units	93
CIM communication interface modules	93
11. Variants	94
12. Grundfos Product Center	96

1. Product introduction



TM02 7397 0511

Fig. 1 CRE, CRIE and CRNE pumps

The CRE, CRIE and CRNE pumps are based on the CR, CRI and CRN pumps.

CRE, CRIE and CRNE pumps belong to the so-called E-pump family and are referred to as E-pumps.

The difference between the CR and CRE pump ranges is the motor. CRE, CRIE and CRNE pumps are fitted with an E-motor, i.e. a motor with built-in frequency converter.

The E-pump motor is a Grundfos MGE motor designed to EN standards.

The built-in frequency converter enables continuously variable control of the motor speed. This means that the pump can be set to operation at any duty point.

The purpose of continuously variable speed control of the motor speed is to adjust the performance to a given requirement.

CRE, CRIE and CRNE pumps are available with an integrated pressure sensor connected to the frequency converter.

The pump materials are identical to those of the CRI and CRN pump ranges.

Selecting an E-pump

Select an E-pump if the following is required:

- controlled operation, i.e. the consumption fluctuates
- constant pressure
- communication with the pump.

Adaptation of performance through frequency-controlled speed control offers obvious benefits, such as:

- energy savings
- increased comfort
- control and monitoring of the pump performance.

Performance range

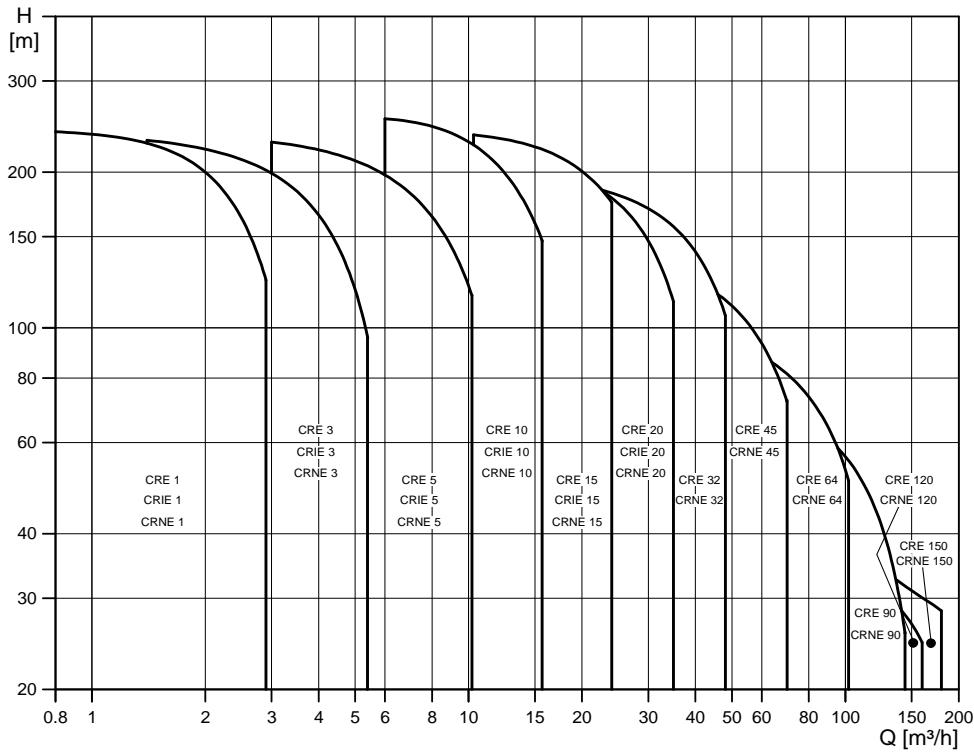


Fig. 2 Performance range, CRE, CRIE and CRNE

TM02 7357 4408

EuP ready

The CRE, CRIE, CRNE pumps are energy-optimised and comply with the EuP Directive (Commission Regulation (EC) No 547/2012) which has been effective since 1 January 2013. As from this date, all pumps will be classified/graduated in a new energy minimum efficiency index (MEI).

Minimum efficiency index

Minimum efficiency index (MEI) means the dimensionless scale unit for hydraulic pump efficiency at best efficiency point (BEP), part load (PL) and overload (OL). The Commission Regulation (EU) sets efficiency requirements to $MEI \geq 0.10$ as from 1 January 2013 and $MEI \geq 0.40$ as from 1 January 2015. An indicative benchmark for best-performing water pump available on the market as from 1 January 2013 is determined in the Commission Regulation.

- The benchmark for most efficient water pumps is $MEI \geq 0.70$.
- The efficiency of a pump with a trimmed impeller is usually lower than that of a pump with the full impeller diameter. The trimming of the impeller will adapt the pump to a fixed duty point, leading to reduced energy consumption. The minimum efficiency index (MEI) is based on the full impeller diameter.
- The operation of this water pump with variable duty points may be more efficient and economic when controlled, for example, by the use of a variable-speed drive that matches the pump duty to the system.
- Information on benchmark efficiency is available at <http://europump.eu/efficiencycharts>.

Minimum efficiency index (MEI)

Pump type	MEI
CR 1-3	> 0.70
CR 3-3	> 0.70
CR 5-3	0.57
CR 10-3	> 0.70
CR 15-3	> 0.70
CR 20-3	> 0.70
CR 32-3	> 0.70
CR 45-3	> 0.70
CR 64-3	> 0.70
CR 90-3	> 0.70

Applications

Application

Water supply

Filtration and transfer at waterworks

Distribution from waterworks

Pressure boosting in mains

Pressure boosting in high-rise buildings, hotels, etc.

Pressure boosting for industrial water supply

Industry

Pressure boosting

Process water systems

Washing and cleaning systems

Vehicle-washing tunnels

Firefighting systems

Liquid transfer

Cooling and air-conditioning systems (refrigerants)

Boiler feed and condensate systems

Machine tools (cooling lubricants)

Aqua-farming

Special transfer duties

Oils and alcohols

Acids and alkalis

Glycol and coolants

Water treatment

Ultrafiltration systems

Reverse osmosis systems

Softening, ionising, demineralising systems

Distillation systems

Separators

Swimming baths

Irrigation

Field irrigation (flooding)

Sprinkler irrigation

Drip-feed irrigation

For further information about which pump version to choose for a specific application or liquid, see *Pumped liquids*, page 78.

Product range

Range	CRE 1	CRE 3	CRE 5	CRE 10	CRE 15	CRE 20
Rated flow rate [m ³ /h]	1.2	3.6	6	12	18	24
Liquid temperature [°C]			-20 - +120			
Liquid temperature [°C], on request			-40 - +180			
Maximum pump efficiency [%]	49	59	67	70	72	72
CRE pumps						
Flow rate [m ³ /h]	0.8 - 2.9	1.4 - 5.4	3 - 10.2	6-16	10-29	13-35
Maximum pressure [bar]	24	24	23	26	24	21
Motor power [kW]	0.37 - 3.0	0.37 - 4.0	0.55 - 7.5	0.75 - 11	1.5 - 18.5	2.2 - 18.5
Version						
CRE:						
Cast iron and stainless steel EN 1.4301/AISI 304	•	•	•	•	•	•
CRIE:						
Stainless steel EN 1.4301/AISI 304	•	•	•	•	•	•
CRNE:						
Stainless steel EN 1.4401/AISI 316	•	•	•	•	•	•
CRT, CRTE: Titanium	See the CRT, CRTE data booklet available on www.grundfos.com (Grundfos Product Center).					
CRE pipe connection						
Oval flange (BSP)	Rp 1	Rp 1	Rp 1 1/4	Rp 1 1/2	Rp 2	Rp 2
Oval flange (BSP), on request	Rp 1 1/4	Rp 1 1/4	Rp 1	Rp 1 1/4 Rp 2	Rp 2 1/2	Rp 2 1/2
Flange	DN 25/ DN 32	DN 25/ DN 32	DN 25/ DN 32	DN 40	DN 50	DN 50
Flange, on request	-	-	-	DN 50	-	-
CRIE pipe connection						
Oval flange (BSP)	Rp 1	Rp 1 1/4	Rp 1 1/4	Rp 1 1/2	Rp 2	Rp 2
Oval flange (BSP), on request	Rp 1 1/4	Rp 1	Rp 1	Rp 2	-	-
Flange	DN 25/ DN 32	DN 25/ DN 32	DN 25/ DN 32	DN 40	DN 50	DN 50
Flange, on request	-	-	-	DN 50	-	-
PJE coupling (Victaulic)	R 1 1/4 DN 32	R 1 1/4 DN 32	R 1 1/4 DN 32	R 2 DN 50	R 2 DN 50	R 2 DN 50
Clamp coupling (L-coupling)	Ø48.3	Ø48.3	Ø48.3	Ø60.3	Ø60.3	Ø60.3
Union (+GF+)	G 2	G 2	G 2	G 2 3/4	G 2 3/4	G 2 3/4
CRNE pipe connection						
Oval flange (BSP)	Rp 1	Rp 1 1/4	Rp 1 1/4	Rp 1 1/2	Rp 2	Rp 2
Oval flange (BSP), on request	Rp 1 1/4	Rp 1	Rp 1	Rp 2	-	-
Flange	DN 25/ DN 32	DN 25/ DN 32	DN 25/ DN 32	DN 40	DN 50	DN 50
Flange, on request	-	-	-	DN 50	-	-
PJE coupling (Victaulic)	R 1 1/4 DN 32	R 1 1/4 DN 32	R 1 1/4 DN 32	R 2 DN 50	R 2 DN 50	R 2 DN 50
Clamp coupling (L-coupling)	Ø42.5	Ø42.5	Ø42.5	Ø60.3	Ø60.3	Ø60.3
Union (+GF+)	G 2	G 2	G 2	G 2 3/4	G 2 3/4	G 2 3/4

- Standard.

Range	CRE 32	CRE 45	CRE 64	CRE 90	CRE 120	CRE 150
Rated flow rate [m ³ /h]	38	54	77	108	140	180
Liquid temperature [°C]			-30 - +120*		-30 - +120*	
Liquid temperature [°C], on request			-40 - +180		-	-
Maximum pump efficiency [%]	76	78	79	80	74	70
CRE pumps						
Flow rate [m ³ /h]	18-48	26-70	36-102	54-146	60-160	75-180
Maximum pressure [bar]	27	26	18.2	16.5	4	5
Motor power [kW]	2.2 - 22	5.5 - 22	7.5 - 22	11-22	18.5	22
Version						
CRE:						
Cast iron and stainless steel EN 1.4301/AISI 304	•	•	•	•	•	•
CRNE:						
Stainless steel EN 1.4401/AISI 316	•	•	•	•	•	•
CRT, CRTE: Titanium	See the CRT, CRTE data booklet available on www.grundfos.com (Grundfos Product Center).					-
CRE pipe connection						
Oval flange (BSP)	-	-	-	-	-	-
Oval flange (BSP), on request	-	-	-	-	-	-
Flange	DN 65	DN 80	DN 100	DN 100	DN 125	DN 125
Flange, on request	DN 80	DN 100	DN 125	DN 125	DN 150	DN 150
CRIE pipe connection						
Oval flange (BSP)	-	-	-	-	-	-
Oval flange (BSP), on request	-	-	-	-	-	-
Flange	-	-	-	-	-	-
Flange, on request	-	-	-	-	-	-
PJE coupling (Vicatulic)	-	-	-	-	-	-
Clamp coupling (L-coupling)	-	-	-	-	-	-
Union (+GF+)	-	-	-	-	-	-
CRNE pipe connection						
Oval flange (BSP)	-	-	-	-	-	-
Oval flange (BSP), on request	-	-	-	-	-	-
Flange	DN 65	DN 80	DN 100	DN 100	DN 125	DN 125
Flange, on request	DN 80	DN 100	DN 125	DN 125	DN 150	DN 150
PJE coupling (Vicatulic)	3"	4"	4"	4"	4"	4"
Clamp coupling (L-coupling)	88.9	114.3	114.3	114.3	114.3	114.3
Union (+GF+)	-	-	-	-	-	-

• Standard.

○ Available.

* CRNE 32 to 150 with HQQE shaft seal: -40 to +120 °C.

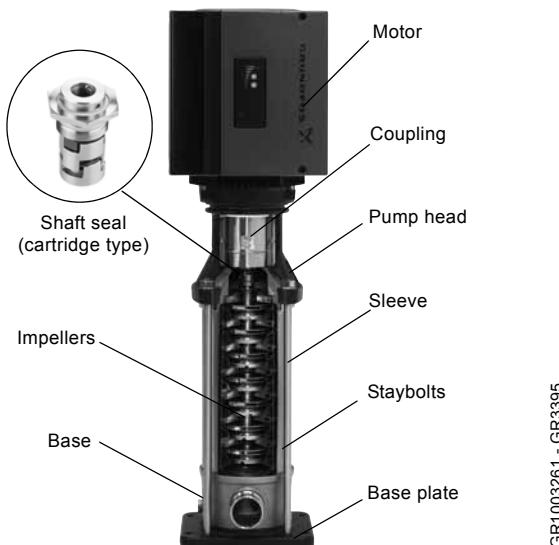
Pump

The CR and CRE pumps are non-self-priming, vertical multistage centrifugal pumps.

The pumps are available with a Grundfos standard motor (CR pumps) or a Grundfos frequency-controlled motor (CRE pumps).

The pump consists of a pump head and a base.

The chamber stack and the sleeve are secured between the pump head and the base by means of staybolts. The base has suction and discharge ports on the same level (in line). All pumps are fitted with a maintenance-free mechanical shaft seal of the cartridge type.



GR1003261 - GR3395

Fig. 3 CR pump

Motor

MGE motors

MGE motors incorporate thermal protection against slow overload and blocking (IEC 34-11: TP 211).

CRE, CRIE and CRNE pumps require no external motor protection.

Grundfos blueflux®

Grundfos blueflux® technology represents the best from Grundfos within energy-efficient motors and frequency converters. Grundfos blueflux® solutions either meet or exceed legislative requirements, such as the EuP IE3 and IE4 grades.



TM04 9901 0814

Fig. 4 Grundfos blueflux® label

To read more about the energy challenge and Grundfos blueflux®, please visit grundfos.com/energy.

Frequency-controlled MGE motors

CRE, CRIE and CRNE pumps are fitted with a totally enclosed, fan-cooled, frequency-controlled MGE motor with principal dimensions to EN standards.

Electrical tolerances comply with EN 60034.

CRE, CRIE, CRNE pumps from 0.37 to 1.1 kW are fitted with single-phase MGE motors as standard. The 1.5 kW single-phase MGE motors are available on request.

CRE, CRIE, CRNE pumps from 1.5 to 22 kW are fitted with three-phase MGE motors as standard. The 0.37 to 1.1 kW three-phase MGE motors are available on request.

See Grundfos Product Center or www.grundfos.com.

Electrical data

MGE motor CRE, CRIE, CRNE	
Mounting designation	Up to 4 kW: V18 5.5 kW and up: V1
Insulation class	F
Efficiency class	0.75 to 11 kW: above IE4 level 15 to 22 kW: IE3 0.37 and 0.55 kW motors are not covered by the IE classification.
Enclosure class	0.37 to 11 kW: IP55 (IP66 optional) 15-22 kW: IP55
	P2: 0.37 - 1.5 kW: 1 x 200-240 V
Supply voltage Tolerance: - 10 %/+ 10 %	P2: 0.37 - 11 kW: 3 x 380-500 V P2: 15-22 kW: 3 x 380-480 V
Supply frequency	50/60 Hz

Optional motors

The Grundfos standard range of motors meets a wide variety of system requirements.

For special applications or operating conditions, we offer custom-built motors, such as:

- ATEX-approved motors
- MG motors with anti-condensation heating unit
- motors with thermal protection.

MGE 0.37 to 11 kW

Advanced functional module (FM 300)

The FM 300 is factory-fitted in all pumps from 0.37 to 11 kW.

The module has a number of inputs and outputs enabling the motor to be used in advanced applications where many inputs and outputs are required.

The FM 300 has these connections:

- three analog inputs
- one analog output
- two dedicated digital inputs
- two configurable digital inputs or open-collector outputs
- Grundfos Digital Sensor input and output
- two Pt100/1000 inputs
- two LiqTec sensor inputs
- two signal relay outputs
- GENibus connection.

Connection terminals

All inputs and outputs are internally separated from the mains-conducting parts by reinforced insulation and galvanically separated from other circuits. All control terminals are supplied by protective extra-low voltage (PELV), thus ensuring protection against electric shock.

• Signal relay outputs

- Signal relay 1:

LIVE:

Mains supply voltages up to 250 VAC can be connected to this output.

PELV:

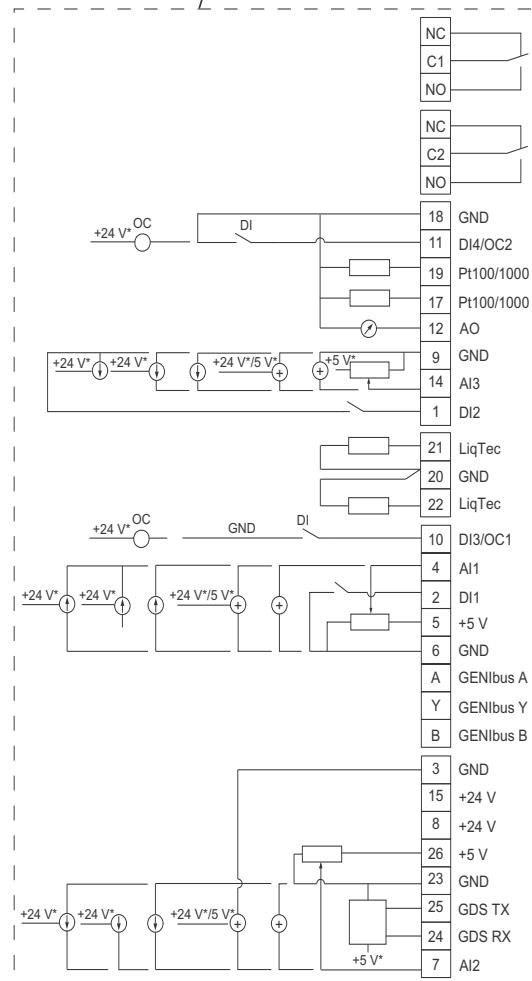
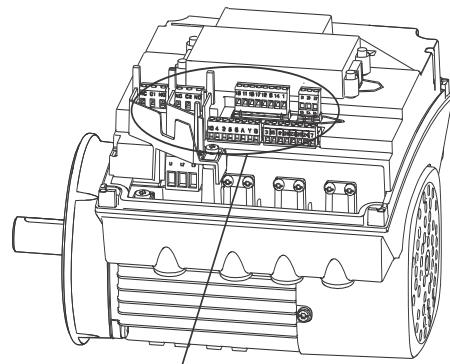
The output is galvanically separated from other circuits. Therefore, the supply voltage or proactive extra-low voltage can be connected to the output as desired.

- Signal relay 2:

PELV:

The output is galvanically separated from other circuits. Therefore, the supply voltage or proactive extra-low voltage can be connected to the output as desired.

• Mains supply (terminals N, PE, L or L1, L2, L3, PE)



* If an external supply source is used, there must be a connection to GND.

TM05 3509 3512

Fig. 5 Connection terminals, FM 300 functional module

MGE 15 to 22 kW

Advanced I/O module

The advanced I/O module is the standard functional module in all MGE motors from 15 to 22 kW.

The module has a number of inputs and outputs enabling the motor to be used in advanced applications where many inputs and outputs are required.

The Advanced I/O module has these connections:

- start/stop terminals
- three digital inputs
- one setpoint input
- one sensor input (feedback sensor)
- one sensor 2 input
- one analog output
- two Pt100 inputs
- two signal relay outputs
- GENibus connection.

Connection terminals

As a precaution, the wires to be connected to the following connection groups must be separated from each other by reinforced insulation in their entire lengths.

Inputs

- Start/stop (terminals 2 and 3)
- digital inputs (terminals 1 and 9, 10 and 9, 11 and 9)
- sensor input 2 (terminals 14 and 15)
- Pt100 sensor inputs (terminals 17, 18, 19 and 20)
- setpoint input (terminals 4, 5 and 6)
- sensor input (terminals 7 and 8)
- GENibus (terminals B, Y and A).

All inputs are internally separated from the mains-conducting parts by reinforced insulation and galvanically separated from other circuits.

All control terminals are supplied with protective extra-low voltage (PELV), thus ensuring protection against electric shock.

Output (relay signal, terminals NC, C, NO)

The output is galvanically separated from other circuits.

Therefore, the supply voltage or protective extra-low voltage can be connected to the output as desired.

- analog output (terminal 12 and 13).

Mains supply (terminals L1, L2, L3)

A galvanic separation must fulfil the requirements for reinforced insulation including creepage distances and clearances specified in EN 61800-5-1.

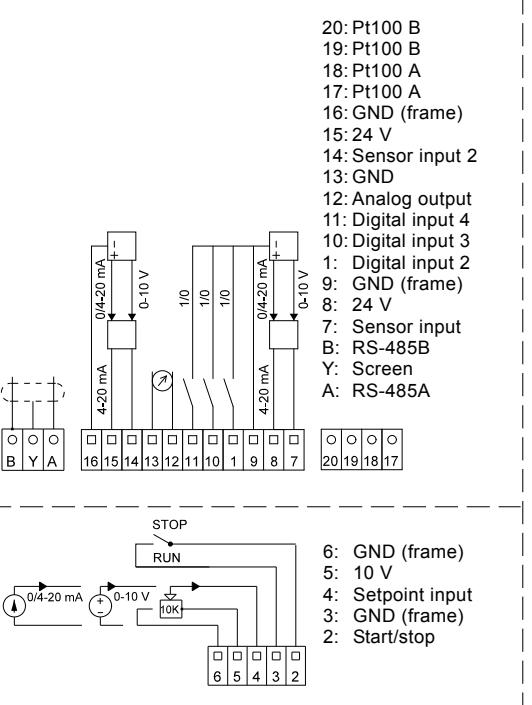
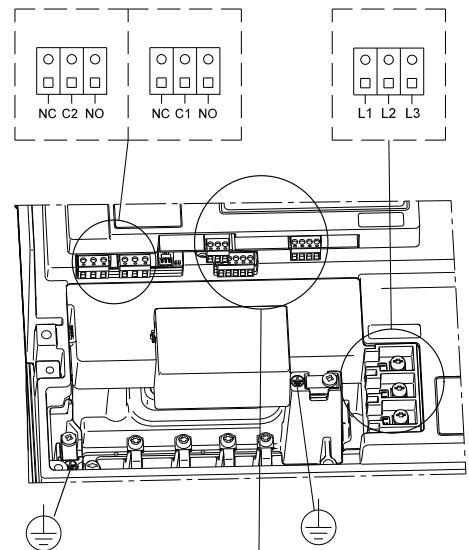
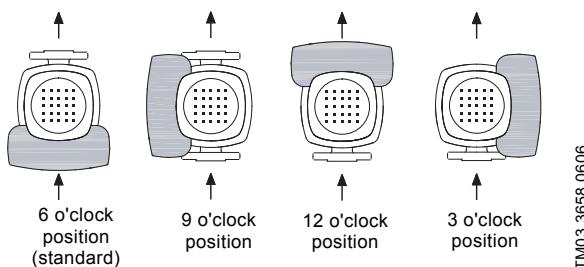


Fig. 6 Connection terminals, Advanced I/O module

TM05 7035 0313

Terminal box positions

As standard, the terminal box is fitted on the suction side of the pump.



TM03 3658 0606

Fig. 7 Terminal box positions

Ambient temperature

Motor power [kW]	Motor make	Phase	Motor efficiency class	Maximum ambient temperature [°C]	Maximum altitude above sea level [m]
0.37 - 1.5	MGE	1	-*	50	
0.37 - 11	MGE	3	-*	50	1,000
15-22	MGE	3	IE3	40	

* Even though the MGE motor (0.37 to 11 kW) has no defined efficiency class, the efficiency is still above the IE4 level including both motor and electronics.

If the ambient temperature exceeds the above maximum ambient temperatures or the pump is installed at an altitude exceeding 1,000 metres, the motor must not be fully loaded due to the risk of overheating. Overheating may result from excessive ambient temperatures or the low density and consequently low cooling effect of the air.

In such cases, it may be necessary to use a motor with a higher rated output.

Viscosity

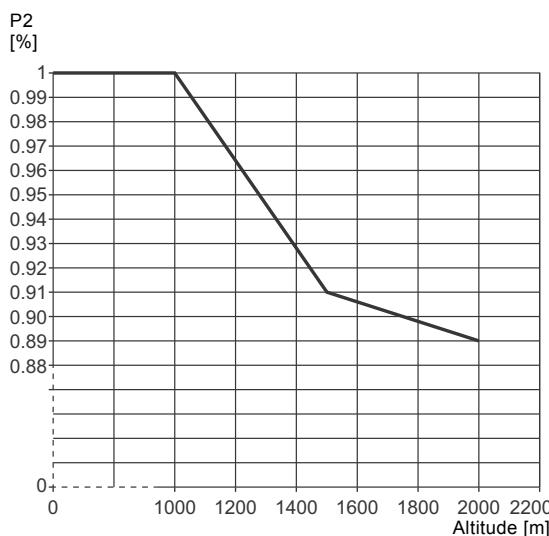
The pumping of liquids with densities or kinematic viscosities higher than those of water will cause a considerable pressure drop, a drop in the hydraulic performance and a rise in the power consumption. In such situations, the pump should be fitted with a larger motor. If in doubt, contact Grundfos.

Installation altitude

Installation altitude is the height above sea level of the installation site. Motors installed up to 1,000 metres above sea level can be loaded 100 %.

Motors installed more than 1,000 metres above sea level must not be fully loaded due to the low density and consequently low cooling effect of the air.

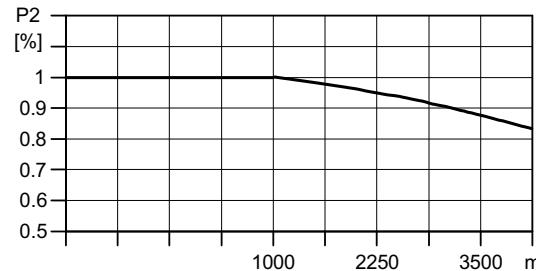
MGE 0.37 to 11 kW



TM05 6400 4712

Fig. 8 Derating of motor output (P2) in relation to altitude above sea level

MGE 15 to 22 kW



TM01 6728 3299

Fig. 9 Derating of motor output (P2) in relation to altitude above sea level

2. Control of E-pumps

Examples of E-pump applications

CRE, CRIE and CRNE pumps are the ideal choice for a number of applications characterised by a demand for variable flow at constant pressure. The pumps are suited for water supply systems and pressure boosting as well as for industrial applications.

Depending on the application, the pumps offer energy savings, increased comfort and improved processing.

E-pumps in the service of industry

The industry uses a large number of pumps in many different applications. Demands on pumps in terms of pump performance and mode of operation make speed control a must in many applications.

Some of the applications in which E-pumps are often used are listed below.

Constant pressure

- Water supply
- washing and cleaning systems
- distribution from waterworks
- humidifying systems
- water treatment systems
- process boosting systems, etc.

Example: Within industrial water supply, E-pumps with integrated pressure sensor are used to ensure a constant pressure in the piping system. From the sensor, the E-pump receives inputs about changes of pressure as a result of changes in the consumption. The E-pump responds to the input by adjusting the speed until the pressure is equalised. The constant pressure is stabilised once more on the basis of a preset setpoint.

Constant temperature

- Air-conditioning systems at industrial plants
- industrial cooling systems
- industrial freezing systems
- casting and moulding tools, etc.

Example: In industrial freezing systems, E-pumps with temperature sensor increase comfort and lower operating costs compared with pumps without a temperature sensor.

An E-pump continuously adapts its performance to the changing demands reflected in the differences in temperature of the liquid circulating in the freezing system. Thus, the lower the demand for cooling, the smaller the quantity of liquid circulated in the system and vice versa.

Constant level

- Boiler feed systems
- condensate systems
- sprinkler irrigation systems
- chemical industry, etc.

Example: In a steam boiler, it is important to be able to monitor and control pump operation to maintain a constant level of water in the boiler.

By using an E-pump with level sensor in the boiler, it is possible to maintain a constant water level.

A constant water level ensures optimum and cost-efficient operation as a result of a stable steam production.

Dosing applications

- Chemical industry, i.e. control of pH values
- petrochemical industry
- paint industry
- degreasing systems
- bleaching systems, etc.

Example: In the petrochemical industry, E-pumps with pressure sensor are used as dosing pumps.

The E-pumps help to ensure that the correct mixture ratio is achieved when more liquids are combined.

E-pumps functioning as dosing pumps improve processing and offer energy savings.

E-pumps in commercial building services

Commercial building services use E-pumps to maintain a constant pressure or a constant temperature based on a variable flow.

Constant pressure

Water supply in high-rise buildings, such as office buildings and hotels.

Example: E-pumps with pressure sensor are used for water supply in high-rise buildings to ensure a constant pressure even at the highest draw-off point. As the consumption pattern and thus the pressure changes during the day, the E-pump continuously adapts its performance until the pressure is equalised.

Constant temperature

- Air-conditioning systems in hotels, schools, etc.
- building cooling systems, etc.

Example: E-pumps are an excellent choice for buildings where a constant temperature is essential. E-pumps keep the temperature constant in air-conditioned, high-rise glass buildings, irrespective of the seasonal fluctuations of the outdoor temperature and various heat impacts inside the building.

Control options

It is possible to communicate with CRE, CRIE, CRNE pumps via the following:

- control panel on the pump
- Grundfos R100 remote control
- Grundfos GO Remote
- central management system.

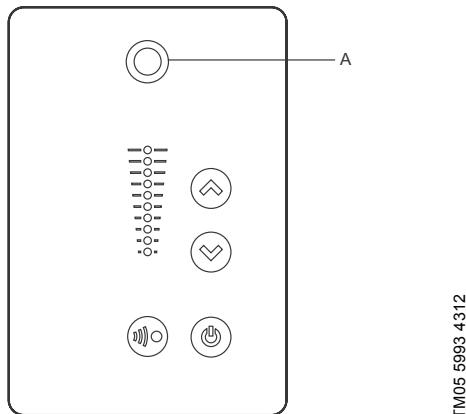
The purpose of controlling an E-pump is to monitor and control the pressure, temperature, flow and liquid level of the system.

Control panel on pump

The control panel on the E-pump terminal box makes it possible to change the setpoint settings manually.

MGE 0.37 to 1111 kW

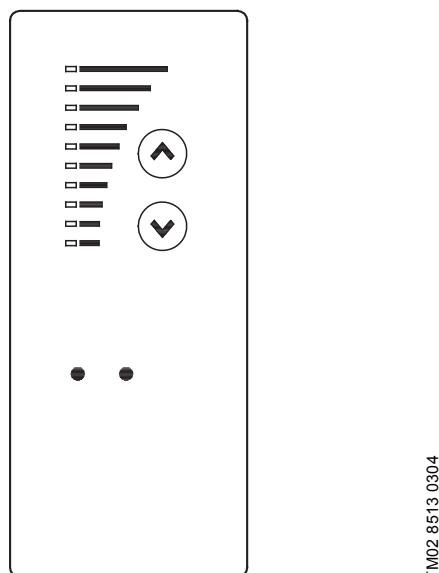
The operating condition of the pump is indicated by the Grundfos Eye on the control panel. See fig. 10, pos. A.



TM05 5993 4312

Fig. 10 Control panel on CRE pump, 0.37 to 11 kW

MGE 15 to 22 kW



TM02 8513 0304

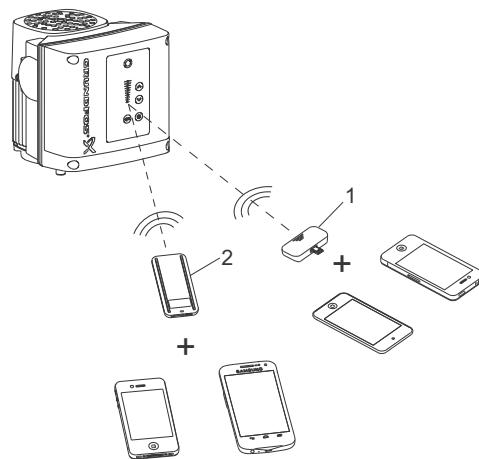
Fig. 11 Control panel on CRE pump, 15 to 22 kW

Grundfos GO Remote

The pump is designed for wireless radio or infrared communication with the Grundfos GO Remote.

The Grundfos GO Remote enables setting of functions and gives access to status overviews, technical product information and actual operating parameters.

The Grundfos GO Remote offers the following mobile interfaces (MI). See fig. 12.



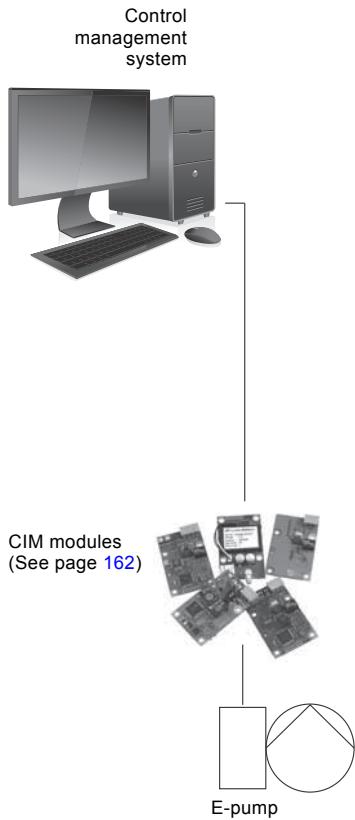
TM06 6256 0916

Fig. 12 Grundfos GO Remote communicating with the pump via radio or infrared connection (IR)

Pos.	Description
1	Grundfos MI 204: Add-on module enabling radio or infrared communication. You can use MI 204 in conjunction with an Apple iPhone or iPod with Lightning connector, e.g. fifth generation or later iPhone or iPod. MI 204 is also available together with an Apple iPod touch and a cover.
2	Grundfos MI 301: Separate module enabling radio or infrared communication. You can use the module in conjunction with an Android or iOS-based smart device with Bluetooth connection.

Central management system

Communication with the E-pump is possible even if the operator is not present near the E-pump. Communication is enabled by connecting the E-pump to a central management system. This allows the operator to monitor the pump and to change control modes and setpoint settings.



TM04 5022 1111

Fig. 13 Structure of a central management system

Control modes for E-pumps

CRE, CRIE and CRNE pumps are available in two variants:

- CRE, CRIE and CRNE with integrated pressure sensor
- CRE, CRIE and CRNE without sensor.

CRE, CRIE and CRNE with integrated pressure sensor

Use CRE, CRIE and CRNE pumps with integrated pressure sensor in applications where you want to control the pressure after the pump, irrespective of the flow. For further information, see *Examples of E-pump applications*, page 13.

Signals of pressure changes in the piping system are transmitted continuously from the sensor to the pump. The pump responds to the signals by adjusting its performance up or down to compensate for the pressure difference between the actual and the desired pressure. As this adjustment is a continuous process, a constant pressure is maintained in the piping system.



TM02 7398 3403

Fig. 14 CRE, CRIE and CRNE pumps

A CRE, CRIE or CRNE pump with integrated pressure sensor facilitates installation and commissioning. CRE, CRIE and CRNE pumps with integrated pressure sensor can be set to either of these control modes:

- constant pressure (factory setting)
- constant curve.

In constant-pressure mode, the pump maintains a preset pressure after the pump, irrespective of the flow. See fig. 15.

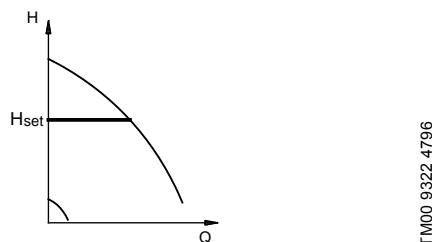


Fig. 15 Constant-pressure mode

In constant-curve mode, the pump is not controlled. It can be set to pump according to a preset pump characteristic within the range from min. curve to max. curve. See fig. 16.

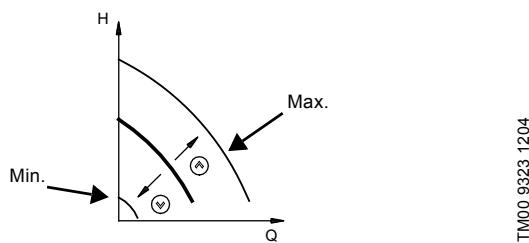


Fig. 16 Constant-curve mode

CRE, CRIE and CRNE without sensor

CRE, CRIE and CRNE pumps without sensor are suitable in these situations:

- Uncontrolled operation is required.
- You want to retrofit another sensor in order to control the flow, temperature, differential temperature, liquid level, pH value, etc. at some arbitrary point in the system.

MGE 0.37 to 11 kW

These CRE, CRIE and CRNE pumps without sensor can be set to either of these control modes:

- constant pressure
- constant differential pressure
- constant temperature
- constant differential temperature
- constant flow rate
- constant level
- constant curve
- constant other value.

MGE 15 to 22 kW

These CRE, CRIE and CRNE pumps without sensor can be set to either of these control modes:

- controlled operation
- uncontrolled operation (factory setting).

In controlled-operation mode, the pump adjusts its performance to the desired setpoint. See fig. 17.

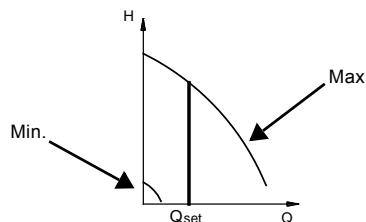


Fig. 17 Constant-flow mode

In uncontrolled-operation mode, the pump operates according to the constant curve set. See fig. 18.

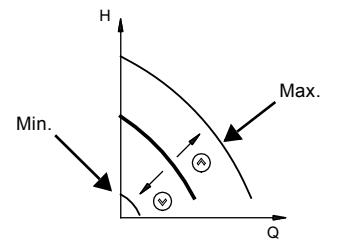


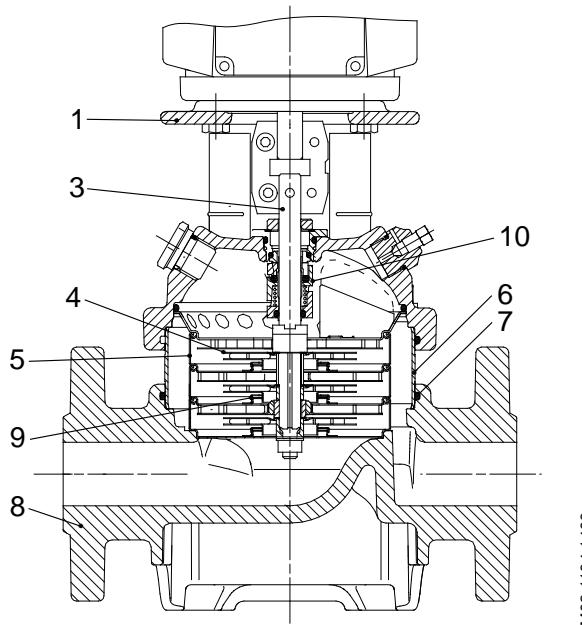
Fig. 18 Constant-curve mode

CRE, CRIE and CRNE pumps can be fitted with sensor types meeting the requirements mentioned in the "Grundfos E-pumps" data booklet available on www.grundfos.com (Grundfos Product Center).

3. Construction

CRE 1, 3, 5, 10, 15 and 20

Sectional drawing



Materials, CRE

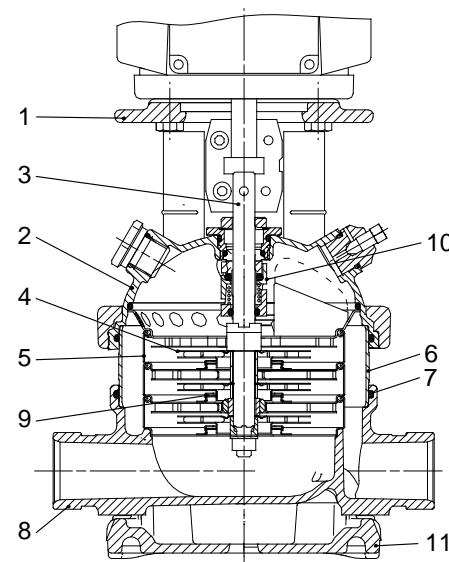
Pos.	Designation	Material	EN/DIN	AISI/ASTM
1	Pump head	Cast iron EN-GJL-200	EN-JL1030	ASTM 25B
3	Shaft	Stainless steel	1.4401 ¹⁾ 1.4057 ²⁾	AISI 316 AISI 431
4	Impeller	Stainless steel	1.4301	AISI 304
5	Chamber	Stainless steel	1.4301	AISI 304
6	Sleeve	Stainless steel	1.4301	AISI 304
7	O-ring for sleeve	EPDM or FKM	-	-
8	Base	Cast iron EN-GJL-250	EN-JL1030	ASTM 25B
9	Neck ring	PTFE	-	-
10	Shaft seal		-	-
	Rubber parts	EPDM or FKM	-	-

¹⁾ CRE 1, 3, 5.

²⁾ CRE 10, 15, 20.

CRIE, CRNE 1, 3, 5, 10, 15 and 20

Sectional drawing



Materials, CRIE and CRNE

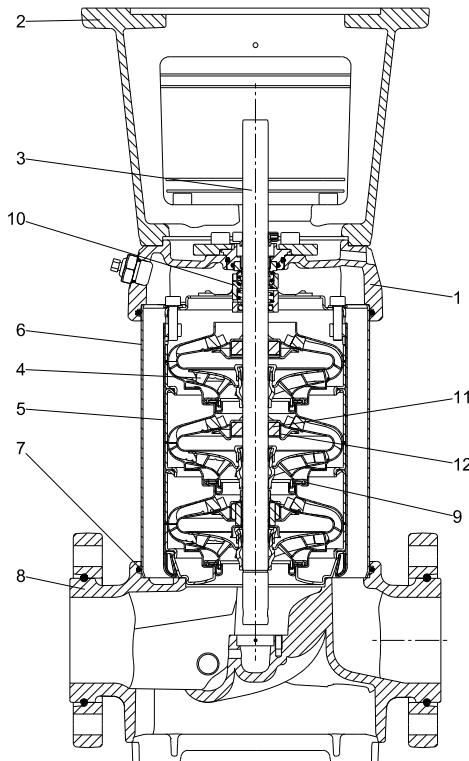
Pos.	Designation	Material	EN/DIN	AISI/ASTM
1	Pump head	Cast iron EN-GJL-200 ¹⁾	EN-JL1030	ASTM 25B
2	Pump head cover	Stainless steel	1.4408	CF 8M equal to AISI 316
3	Shaft	Stainless steel	1.4401 ²⁾ 1.4460 ³⁾ 1.4057 ⁴⁾	AISI 316 AISI 329 AISI 431
8	Base	Stainless steel	1.4408	CF 8M equal to AISI 316
9	Neck ring	PTFE	-	-
10	Shaft seal	Cartridge type	-	-
11	Base plate	Cast iron EN-GJL-200 ¹⁾	EN-JL1030	ASTM 25B
	Rubber parts	EPDM or FKM	-	-
CRIE				
4	Impeller	Stainless steel	1.4301	AISI 304
5	Chamber	Stainless steel	1.4301	AISI 304
6	Sleeve	Stainless steel	1.4301	AISI 304
7	O-ring for sleeve	EPDM or FKM	-	-
CRNE				
4	Impeller	Stainless steel	1.4401	AISI 316
5	Chamber	Stainless steel	1.4401	AISI 316
6	Sleeve	Stainless steel	1.4401	AISI 316
7	O-ring for sleeve	EPDM or FKM	-	-

¹⁾ Stainless steel available on request.

²⁾ CRIE, CRNE 1, 3, 5.

³⁾ CRNE.

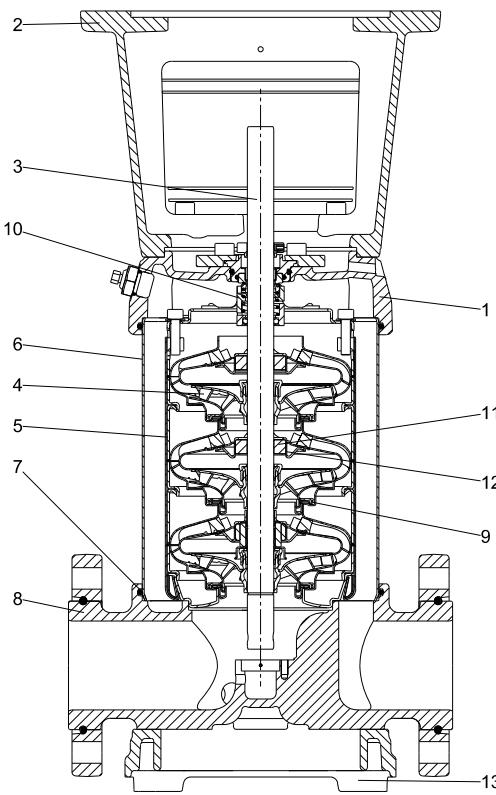
⁴⁾ CRIE 10, 15, 20.

CRE 32, 45, 64 and 90**Sectional drawing**

TM06 0711 0814

Materials, CRE

Pos.	Designation	Materials	EN/DIN	AISI/ASTM
1	Pump head	Cast iron EN-GJS-500-7	EN-JS1050	ASTM 80-55-06
2	Motor stool	Cast iron EN-GJL-200	EN-JL1030	ASTM 25B
3	Shaft	Stainless steel	1.4057	AISI 431
4	Impeller	Stainless steel	1.4301	AISI 304
5	Chamber	Stainless steel	1.4301	AISI 304
6	Sleeve	Stainless steel	1.4301	AISI 304
7	O-ring for sleeve	EPDM or FKM		
8	Base	Cast iron EN-GJS-500-7	EN-JS1050	ASTM 80-55-06
9	Neck ring	Carbon-graphite-filled PTFE		
10	Shaft seal			
11	Bearing ring	SiC/SiC		
12	Support bearing	Carbon-graphite-filled PTFE		
	Rubber parts	EPDM or FKM		

CRNE 32, 45, 64 and 90**Sectional drawing**

TM06 0712 0814

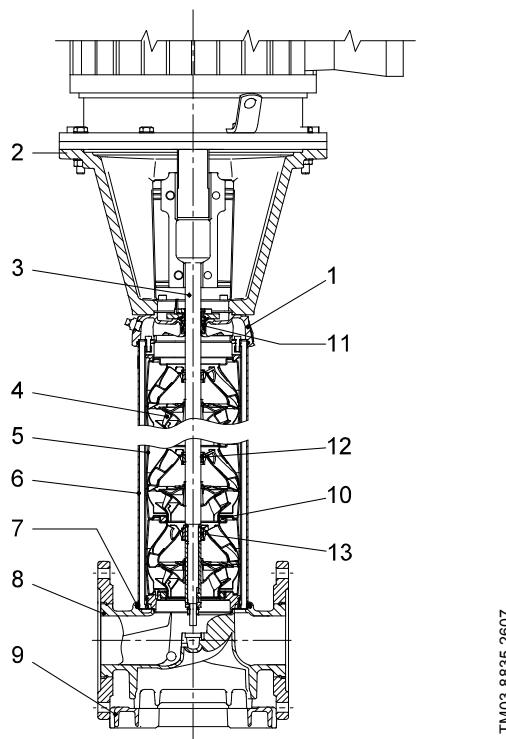
Materials, CRNE

Pos.	Designation	Materials	EN/DIN	AISI/ASTM
1	Pump head	Stainless steel	1.4408	CF 8M equal to AISI 316
2	Motor stool	Cast iron EN-GJL-200 ¹⁾	EN-JL1030	ASTM 25B
3	Shaft	Stainless steel	1.4462	
4	Impeller	Stainless steel	1.4401	AISI 316
5	Chamber	Stainless steel	1.4401	AISI 316
6	Sleeve	Stainless steel	1.4401	AISI 316
7	O-ring for sleeve	EPDM or FKM		
8	Base	Stainless steel	1.4408	CF 8M equal to AISI 316
9	Neck ring	Carbon-graphite-filled PTFE		
10	Shaft seal			
11	Bearing ring	SiC/SiC		
12	Support bearing	Carbon-graphite-filled PTFE		
13	Base plate	Cast iron EN-GJS-500-7 ¹⁾	EN-JS1050	ASTM 88-55-06
	Rubber parts	EPDM or FKM		

¹⁾ Stainless steel available on request.

CRE 120 and 150

Sectional drawing

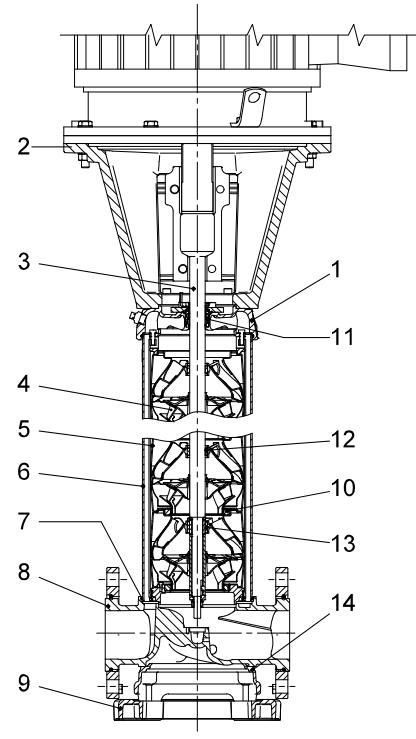
**Materials, CRE**

Pos.	Designation	Materials	EN/DIN	AISI/ASTM
1	Pump head	Cast iron EN-GJS-500-7	EN-JS1050	A 536 65-45-12
2	Motor stool (11-45 kW)	Cast iron EN-GJL-200	EN-JL1030	A48-30 B
2	Motor stool (55-75 kW)	Cast iron EN-GJS-500-7	EN-JS1050	A 536 65-45-12
3	Shaft	Stainless steel	1.4057	AISI 431
4	Impeller	Stainless steel	1.4301	AISI 304
5	Chamber	Stainless steel	1.4301	AISI 304
6	Sleeve	Stainless steel	1.4401	AISI 316
7	O-ring for sleeve	EPDM or FKM		
8	Base	Cast iron EN-GJS-500-7	EN-JS1050	A 536 65-45-12
9	Base plate	Cast iron EN-GJS-500-7	EN-JS1050	A 536 65-45-12
10	Neck ring	Carbon-graphite-filled PTFE		
11	Shaft seal ¹⁾	SiC/SiC (Ø22) Carbon/SiC (Ø32)		
12	Support bearing	Carbon-graphite-filled PTFE		
13	Bearing ring	SiC/SiC		
	Rubber parts	EPDM or FKM		

¹⁾ Ø22 mm shaft, 11-45 kW.
Ø32 mm shaft, 55-75 kW.

CRNE 120 and 150

Sectional drawing

**Materials, CRNE**

Pos.	Designation	Materials	EN/DIN	AISI/ASTM
1	Pump head	Stainless steel	1.4408	A 351 CF 8M
	Motor stool (11-45 kW)	Cast iron EN-GJL-200	EN-JL1030	A48-30 B
2	Motor stool (55-75 kW)	Cast iron EN-GJS-500-7	EN-JS1050	A 536 65-45-12
3	Shaft	Stainless steel	1.4462	SAF 2205
4	Impeller	Stainless steel	1.4401	AISI 316
5	Chamber	Stainless steel	1.4401	AISI 316
6	Sleeve	Stainless steel	1.4401	AISI 316
7	O-ring for sleeve	EPDM or FKM		
8	Base	Stainless steel	1.4408	A 351 CF 8M
9	Base plate	Cast iron EN-GJS-500-7 ¹⁾	EN-JS1050	A 536 65-45-12
10	Neck ring	Carbon-graphite-filled PTFE		
11	Shaft seal ²⁾	SiC/SiC (Ø22) Carbon/SiC (Ø32)		
12	Support bearing	Carbon-graphite-filled PTFE		
13	Bearing ring	SiC/SiC		
14	Base plate	Cast iron EN-GJS-500-7 ¹⁾	EN-JS1050	A 536 65-45-12
	Rubber parts	EPDM or FKM		

¹⁾ Stainless steel available on request.
²⁾ Ø22 mm shaft, 11-45 kW.
Ø32 mm shaft, 55-75 kW.

4. Type key

Pump

Example	CR	E	32	s	-4	-2	-A	-F	-G	-E	-HQQE
Type range: CR, CRI, CRN, CRT											
Pump with integrated frequency converter											
Flow rate [m ³ /h]											
Undersize impeller (all impellers) CR 1s, CRI 1s, CRN 1s											
Number of impellers											
Number of reduced-diameter impellers CR(E), CRN(E) 32, 45, 64, 90, 120, 150											
Code for pump version											
Code for pipe connection											
Code for materials											
Code for rubber parts											
Code for shaft seal											

Key to codes

Code	Description
Pump version	
A	Basic version
B	Oversize motor
D	Pump with pressure intensifier*
DW	Deep-well pump with ejector*
E	Pump with certificate or ATEX approval
F	Pump for high temperatures (with air-cooled top)
G	Multi-E slave*
H	Horizontal version
HS	High-pressure pump with high-speed MGE motor*
I	Different pressure rating
J	Pump with a different maximum speed
K	Pump with low NPSH
M	Magnetic drive
N	With sensor
P	Undersize motor
R	Horizontal version with bearing bracket
SF	High-pressure pump
V	Multi-E master*
X	Special version
Pipe connection	
A	Oval flange
B	NPT thread
CA	FlexiClamp
CX	Triclamp*
F	DIN flange
G	ANSI flange
J	JIS flange
N	Changed diameter of ports
P	PJE coupling
X	Special version

Code	Description
Materials	
A	Basic version
AD	Carbon-graphite-filled PTFE (bearings)
G	Wetted parts EN 1.4401/AISI 316
GI	All parts stainless steel, wetted parts EN 1.4401/AISI 316
I	Wetted parts EN 1.4301/AISI 304
II	All parts stainless steel, wetted parts EN 1.4301/AISI 304
K	Bronze (bearings)
S	SiC bearings + PTFE neck rings
X	Special version
SX	Carbon free
Code for rubber parts in pump	
E	EPDM
F	FXM (Fluoraz®)
K	FFKM (Kalrez®)
V	FKM (Viton®)
Shaft seal type designation	
A	O-ring seal with fixed driver*
D	Balanced O-ring seal*
H	Balanced cartridge seal with O-ring
K	Type M as cartridge seal*
O	Double seal, back-to-back*
P	Double seal, tandem*
X	Special version*
Seal face material	
B	Carbon, synthetic resin-impregnated
C	Other types of carbon*
H	Cemented tungsten carbide, embedded (hybrid)*
U	Cemented tungsten carbide
Q	Silicon carbide
X	Other ceramics*
Secondary seal material (rubber parts)	
E	EPDM
F	FXM (Fluoraz®)
K	FFKM (Kalrez®)
V	FKM (Viton®)

* Option. See the CR "Custom-built pumps" data booklet available on www.grundfos.com (Grundfos Product Center).

Shaft seal

Example	-H	-Q	-Q	-E
Shaft seal type designation				
Material of rotating seal face				
Material of stationary seal face				
Material of secondary seal (rubber parts)				

5. Operating and inlet pressures

Maximum operating pressure and liquid temperature

Pump type	Oval flange	PJE, clamp, union, DIN		
	TM0213791101	TM0213831101		
	Maximum permissible operating pressure [bar]	Liquid temperature [°C]	Maximum permissible operating pressure [bar]	Liquid temperature [°C]
CRE, CRIE, CRNE 1	16		25	
CRE, CRIE, CRNE 3	16	-20 - +120	25	
CRE, CRIE, CRNE 5	16		25	
CRE, CRIE 10-1 → 10-10	16		16	-20 - +120
CRE, CRIE 10-12 → 10-17	-	-	25	
CRNE 10	16	-20 - +120	25	
CRE, CRIE 15-1 → 15-5	10		-	-
CRE, CRIE 15-1 → 15-8	-	-	16	
CRE, CRIE 15-9 → 15-12	-	-	25	-20 - +120
CRNE 15	10	-20 - +120	25	
CRE, CRIE 20-1 → 20-5	10		-	-
CRE, CRIE 20-1 → 20-7	-	-	16	
CRE, CRIE 20-8 → 20-10	-	-	25	-20 - +120
CRNE 20	10	-20 - +120	25	
CRE, CRNE 32-1-1 → 32-5	-	-	16	
CRE, CRNE 32-6-2 → 32-10-2	-	-	30	
CRE, CRNE 45-1-1 → 45-4	-	-	16	
CRE, CRNE 45-5-2 → 45-7	-	-	30	
CRE, CRNE 64-1-1 → 64-3	-	-	16	-30 - +120
CRE, CRNE 90-1-1 → 90-3	-	-	16	
CRE, CRNE 120	-	-	30	
CRE, CRNE 150	-	-	30	

NOTE: For pump sizes 32, 45, 64, 90, 120, 150, the max. pressure for PJE version is 50 bar and only available in CRNE version.

Operating range of the shaft seal

The operating range of the shaft seal depends on operating pressure, pump type, type of shaft seal and liquid temperature. The range shown in figures below applies to clean water and water with anti-freeze liquids. For selection of the right shaft seal, see [Pumped liquids](#), page 78. If the operating range is exceeded, the life of the shaft seal may be reduced.

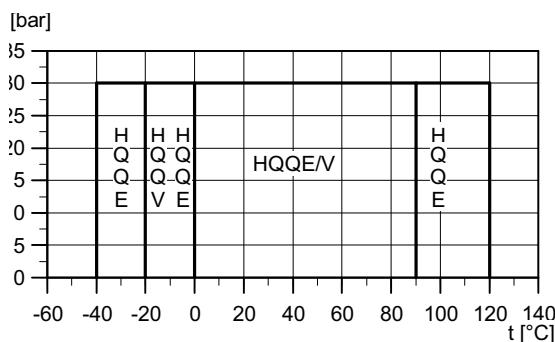
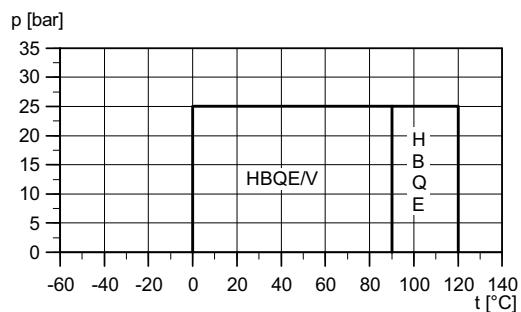


Fig. 19 Operating range of shaft seals 0.37 to 45 kW

TM03 8853 4607



TM06 7987 4216

Fig. 20 Operating range of shaft seals 55 and 75 kW

Standard shaft seal	Motor size [kW]	Max. pressure [bar]	Description	Liquid temperature [°C]
HQQE	0.37 - 45	0 - 30	O-ring (cartridge) (balanced seal), SiC/SiC, EPDM	-40 - +120
HBQE ¹⁾	55-75	0 - 25	O-ring (cartridge) (balanced seal), carbon/SiC, EPDM	0-120
HQQV	0.37 - 45	0 - 30	O-ring (cartridge) (balanced seal), SiC/ FKM	-20 - +90
HBQV ¹⁾	55-75	0 - 25	O-ring (cartridge) (balanced seal), carbon/SiC, FKM	0-90

¹⁾ Available as HQQE and HQQV on request.

See [Variants](#), page 94, in case of extreme temperatures:

- low temperatures down to -40 °C
- high temperatures up to 180 °C.

Maximum inlet pressure

The following table shows the maximum permissible inlet pressure. However, the actual inlet pressure plus the pressure against a closed valve must always be lower than the maximum permissible operating pressure.

If the maximum permissible operating pressure is exceeded, the conical bearing in the motor may be damaged and the life of the shaft seal reduced.

Pump type	[bar]
CRE, CRIE, CRNE 1	
1-2 → 1-25	10
1-27	15
CRE, CRIE, CRNE 3	
3-2 → 3-17	10
3-19 → 3-25	15
CRE, CRIE, CRNE 5	
5-2 → 5-9	10
5-10 → 5-24	15
CRE, CRIE, CRNE 10	
10-1 → 10-5	8
10-6 → 10-17	10
CRE, CRIE, CRNE 15	
15-1 → 15-2	8
15-3 → 15-12	10
CRE, CRIE, CRNE 20	
20-1	8
20-2 → 20-10	10
CRE, CRNE 32	
32-1-1 → 32-2	4
32-3-2 → 32-6	10
32-7	15
CRE, CRNE 45	
45-1-1 → 45-1	4
45-2-2 → 45-3	10
45-4-2	15
CRE, CRNE 64	
64-1-1	4
64-1 → 64-2-1	10
64-2 → 64-3-2	15
CRE, CRNE 90	
90-1-1 → 90-2-2	10
90-2-1	15
CRE, CRNE 120	
120-1	10
CRE, CRNE 150	
150-1-1	10
150-1	15

Examples of operating and inlet pressures

The values for operating and inlet pressures stated in the table should not be considered individually but should always be compared. See the following examples.

Example 1

The following pump type has been selected: CRE 3-11 A-A-A.

Maximum operating pressure: 16 bar. Maximum inlet pressure: 10 bar.

Discharge pressure against a closed valve: 9.6 bar.

See page [33](#).

This pump is not allowed to start at an inlet pressure of 10 bar, but at an inlet pressure of $16.0 - 10.3 = 5.7$ bar.

Example 2

The following pump type has been selected: CRE 10-2 A-A-A.

Maximum operating pressure: 16 bar.

Maximum inlet pressure: 8 bar.

Discharge pressure against a closed valve: 2.9 bar.

See page [40](#).

This pump is allowed to start at an inlet pressure of 8 bar, as the discharge pressure against a closed valve is only 2.9 bar, which results in an operating pressure of $8.0 + 2.9 = 10.9$ bar. On the contrary, the maximum operating pressure of this pump is limited to 16 bar, as a higher operating pressure will require an inlet pressure of more than 8 bar.

If the inlet or operating pressure exceeds the permissible pressure, see *Variants*, page [94](#).

6. Selection and sizing

Selection of pumps

Selection of pumps should be based on these parameters:

- the duty point of the pump (see below)
- dimensional data such as pressure loss as a result of height differences, friction loss in the pipework, pump efficiency (see below)
- pump materials (see page 26)
- pump connections (see page 26)
- shaft seal (see page 26).

Duty point of the pump

From a duty point, it is possible to select a pump on the basis of the curve charts in section *Performance curves and technical data*, page 29.

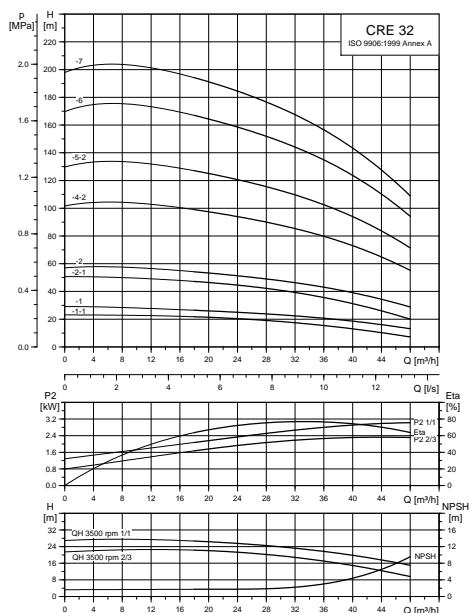


Fig. 21 Example of a curve chart

Dimensional data

When sizing a pump, take these parameters into account:

- Required flow and pressure at the draw-off point.
- Pressure loss as a result of height differences (H_{geo}).
- Friction loss in the pipework (H_f).
It may be necessary to account for pressure loss in connection with long pipes, bends, valves, etc.
- Best efficiency at the estimated duty point.
- NPSH value.
For calculation of the NPSH value, see *Minimum inlet pressure, NPSH*, page 27.

Pump efficiency

Before determining the best efficiency point, identify the operation pattern of the pump. If the pump is expected to operate at the same duty point, select a CR pump which is operating at a duty point corresponding to the best efficiency of the pump.

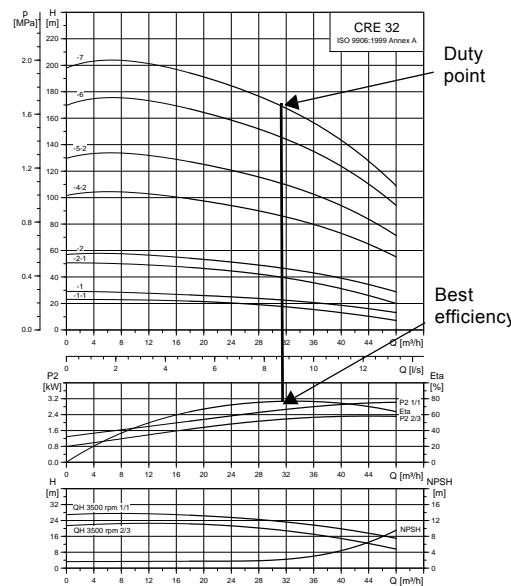


Fig. 22 Example of a CRE pump's duty point

As the pump is sized on the basis of the highest possible flow, it is important always to have the duty point to the right on the efficiency curve (η) in order to keep the efficiency high when the flow drops.

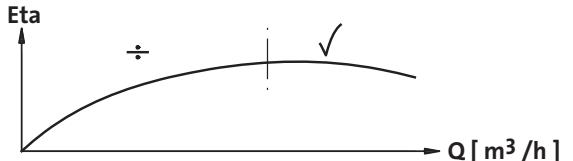


Fig. 23 Best efficiency

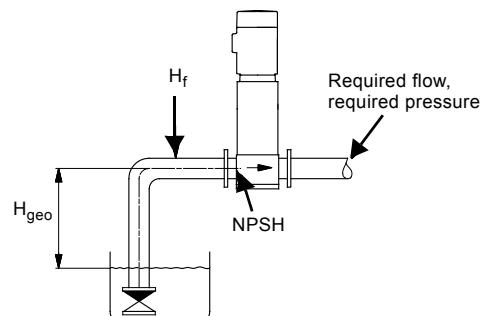


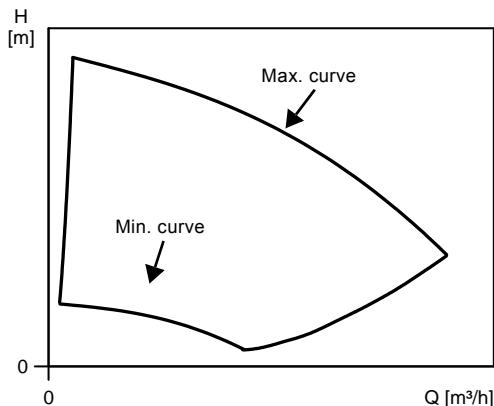
Fig. 24 Dimensional data

Normally, E-pumps are used in applications characterised by a variable flow. Consequently, it is not possible to select a pump that is constantly operating at optimum efficiency.

In order to achieve optimum operating economy, the pump should be selected on the basis of the following criteria:

- The maximum duty point required should be as close as possible to the QH curve of the pump.
- The flow rate at the duty point required should be close to the optimum efficiency (eta) for most operating hours.

Between the min. and max. performance curves, E-pumps have an infinite number of performance curves, each representing a specific speed. Therefore, it may not be possible to select a duty point close to the 100 % curve.



TM01 4916 4803

Fig. 25 Min. and max. performance curves

In situations where it is not possible to select a duty point close to the 100 % curve, the below affinity equations can be used. The head (H), flow (Q) and input power (P) are all the appropriate variables for the motor speed (n).

Note:

The approximated formulas apply on condition that the system characteristic remains unchanged for n_n and n_x and that it is based on the formula $H = k \times Q^2$ where k is a constant.

The power equation implies that the pump efficiency is unchanged at the two speeds. In practice, this is not quite correct.

To obtain a precise calculation of the power savings resulting from a reduction of pump speed, take into account the efficiencies of the frequency converter and the motor.

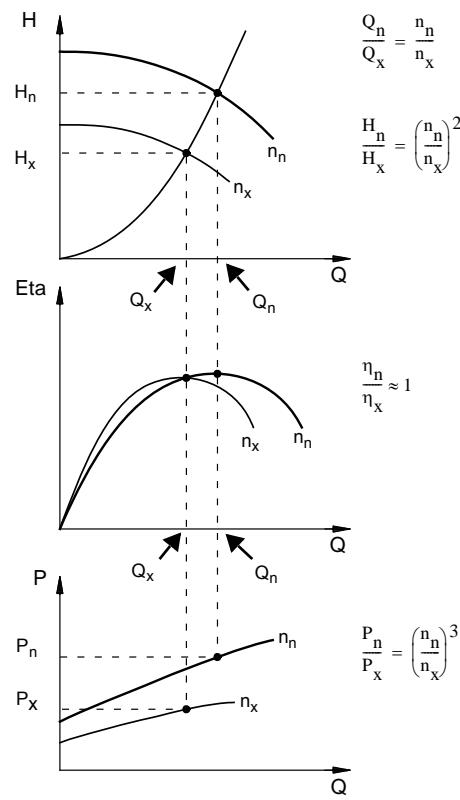


Fig. 26 Affinity equations

Legend

H_n	Rated head [m]
H_x	Actual head [m]
Q_n	Rated flow rate [m^3/h]
Q_x	Actual flow rate [m^3/h]
n_n	Rated motor speed [min^{-1}] ($n_n = 3500 min^{-1}$)
n_x	Actual motor speed [min^{-1}]
η_n	Rated efficiency [%]
η_x	Actual efficiency [%]

The program offer the possibility of calculating an E-pump's specific duty point and energy consumption. By entering the dimensional data of the pump, Grundfos Product Center can calculate the exact duty point and energy consumption.

See [Grundfos Product Center](#) for further information.

Pump material

Select the material variant on the basis of the liquid to be pumped.

The product range covers the following three basic types:

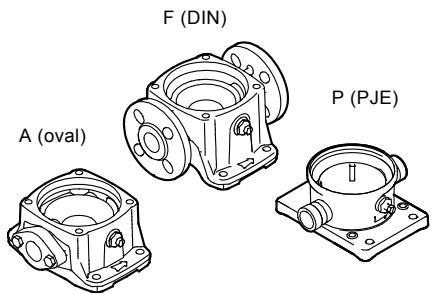
- CRE, CRIE
Use CRE, CRIE pumps for clean, non-aggressive liquids such as potable water and oils.
- CRNE
Use CRNE pumps for industrial liquids and acids.
See *Pumped liquids*, page 78, or contact Grundfos.

For saline or chloride-containing liquids such as sea water, CRTE pumps of titanium are available.

Pump connections

The selection of pump connection depends on the rated pressure and pipework. To meet any requirement, the CRE, CRIE and CRNE pumps offer a wide range of flexible connections, such as

- oval flange (BSP)
- DIN flange
- PJE coupling
- clamp coupling
- union (+GF+)
- other connections on request.



TM02 1201 0601


Fig. 27 Pump connections

Shaft seal

As standard, the CRE range is fitted with a Grundfos shaft seal (cartridge type) suitable for the most common applications.

These key parameters must be taken into account when selecting the shaft seal:

- type of pumped liquid
- liquid temperature
- maximum pressure.



TM02 0538 4800


Fig. 28 Shaft seal (cartridge type)

We offer a wide range of shaft seal variants to meet specific demands. See *Pumped liquids*, page 78.

Operating pressure and inlet pressure

Do not exceed the limit values for these pressures:

- maximum operating pressure (see page 21)
- maximum inlet pressure (see page 22).



TM01 2100 1198

Fig. 29 CR pump

Minimum inlet pressure, NPSH

Calculation of the inlet pressure "H" is recommended in these situations:

- The liquid temperature is high.
- The flow is significantly higher than the rated flow.
- Water is drawn from depths.
- Water is drawn through long pipes.
- Inlet conditions are poor.

To avoid cavitation, make sure that there is a minimum pressure on the suction side of the pump.

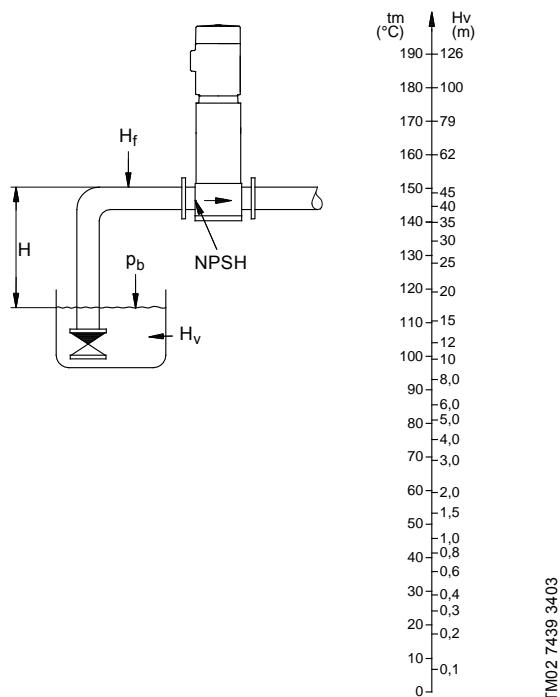
The maximum suction lift "H" in metres head can be calculated as follows:

$$H = p_b \times 10.2 - \text{NPSH} - H_f - H_v - H_s$$

p_b	Barometric pressure in bar. = Barometric pressure can be set to 1 bar. In closed systems, p_b indicates the system pressure in bar.
NPSH	Net Positive Suction Head in metres head. = To be read from the NPSH curve at the highest flow the pump will be delivering.
H_f	Friction loss in suction pipe in metres head. At the highest flow the pump will be delivering.
H_v	Vapour pressure in metres head. = To be read from the vapour pressure scale. H_v depends on the liquid temperature t_m .
H_s	= Safety margin = minimum 0.5 metres head.

If the calculated "H" is positive, the pump can operate at a suction lift of maximum "H" metres head.

If the calculated "H" is negative, an inlet pressure of minimum "H" metres head is required.



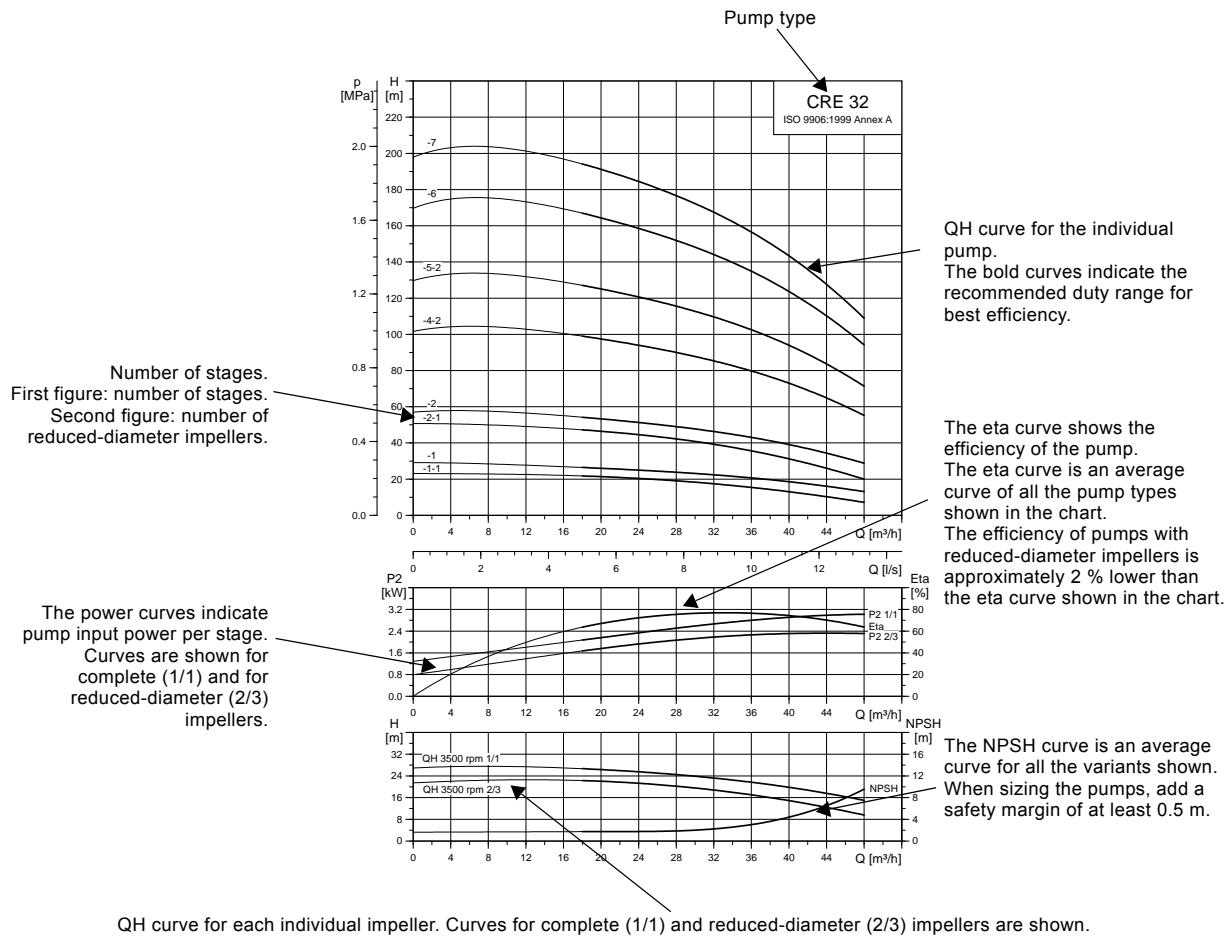
TM02 7439 3403

Fig. 30 Minimum inlet pressure, NPSH

Note: To avoid cavitation, never select a pump with a duty point too far to the right on the NPSH curve.

Always check the NPSH value of the pump at the highest possible flow.

How to read the curve charts



TM027323103

Fig. 31 How to read the curve charts

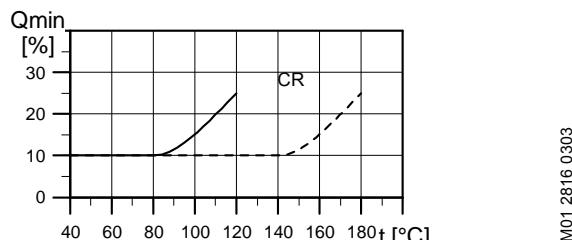
Guidelines to performance curves

The guidelines below apply to the curves shown on the following pages:

- Tolerances to ISO 9906:1999 Annex A, if indicated.
- The motors used for the measurements are standard Grundfos MG or MGE motors.
- Measurements have been made with airless water at a temperature of 20 °C.
- The curves apply to the following kinematic viscosity: $\nu = 1 \text{ mm}^2/\text{s}$ (1 cSt).

Due to the risk of overheating, the pumps should not be used at a flow below the minimum flow rate.

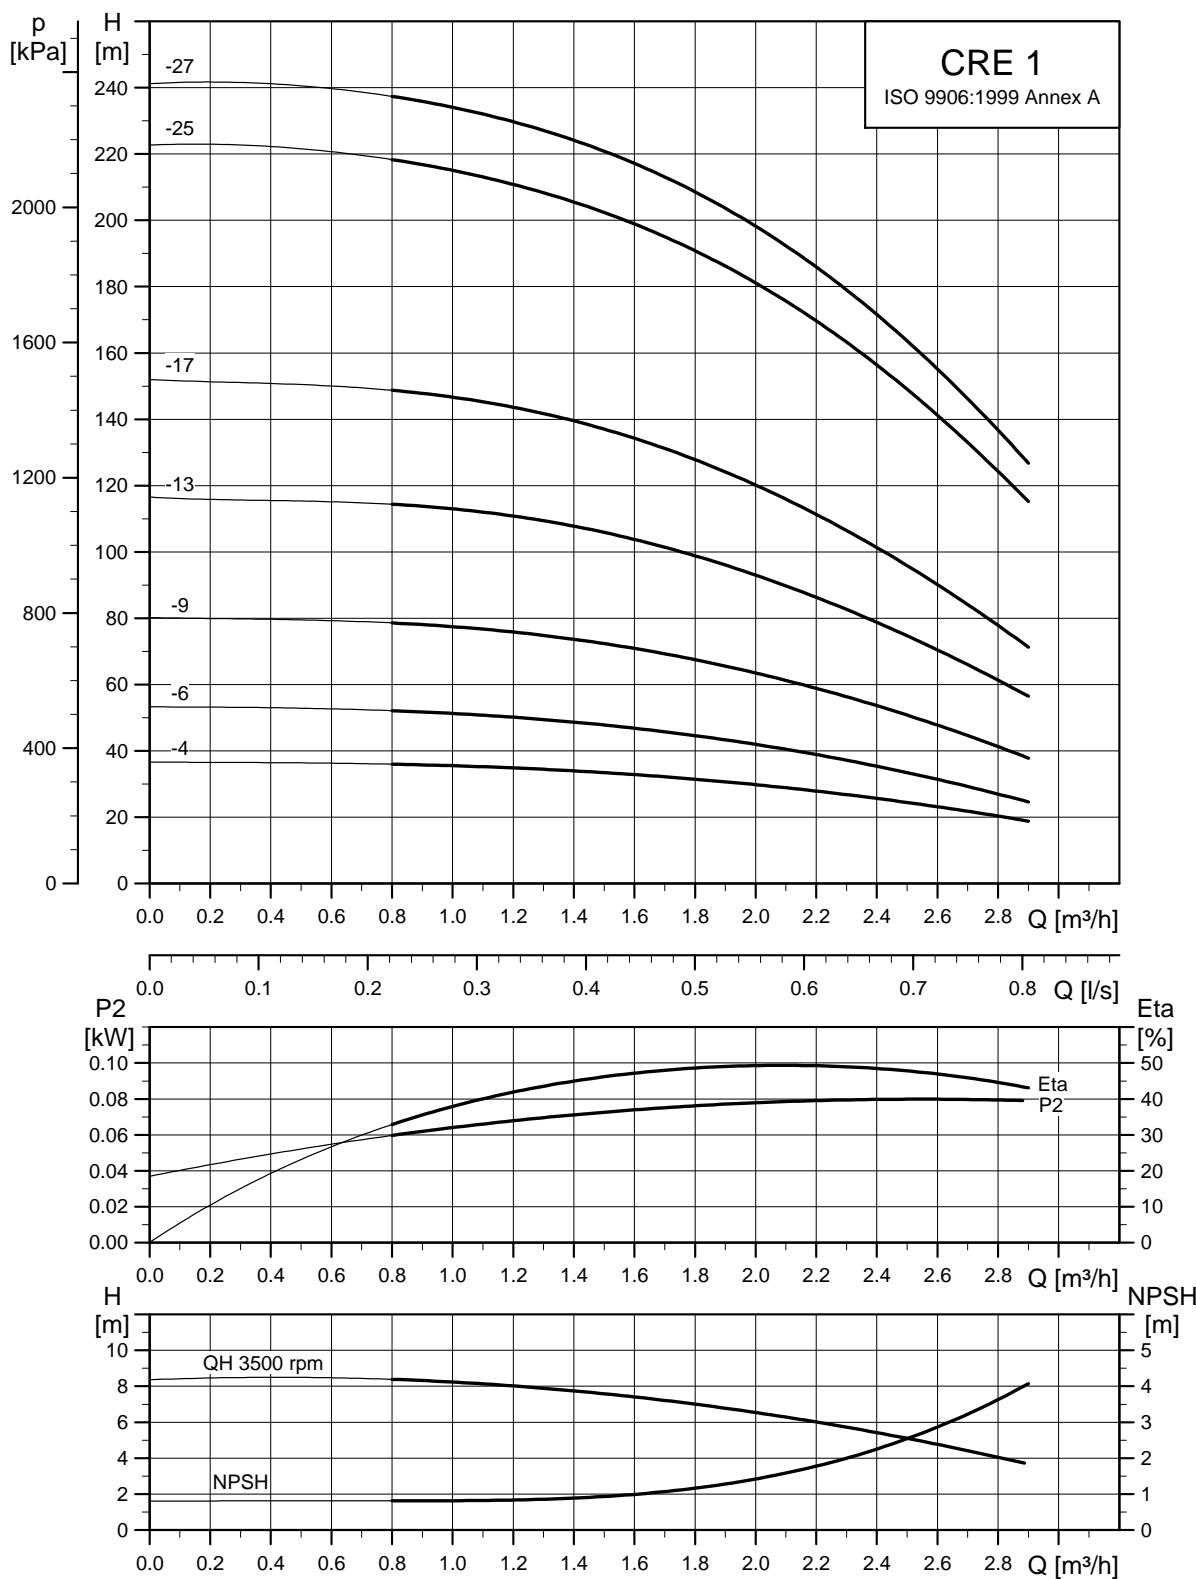
The curve below shows the minimum flow rate as a percentage of the rated flow rate in relation to the liquid temperature. The dotted line shows a CR pump fitted with an air-cooled top assembly.



Minimum flow rate

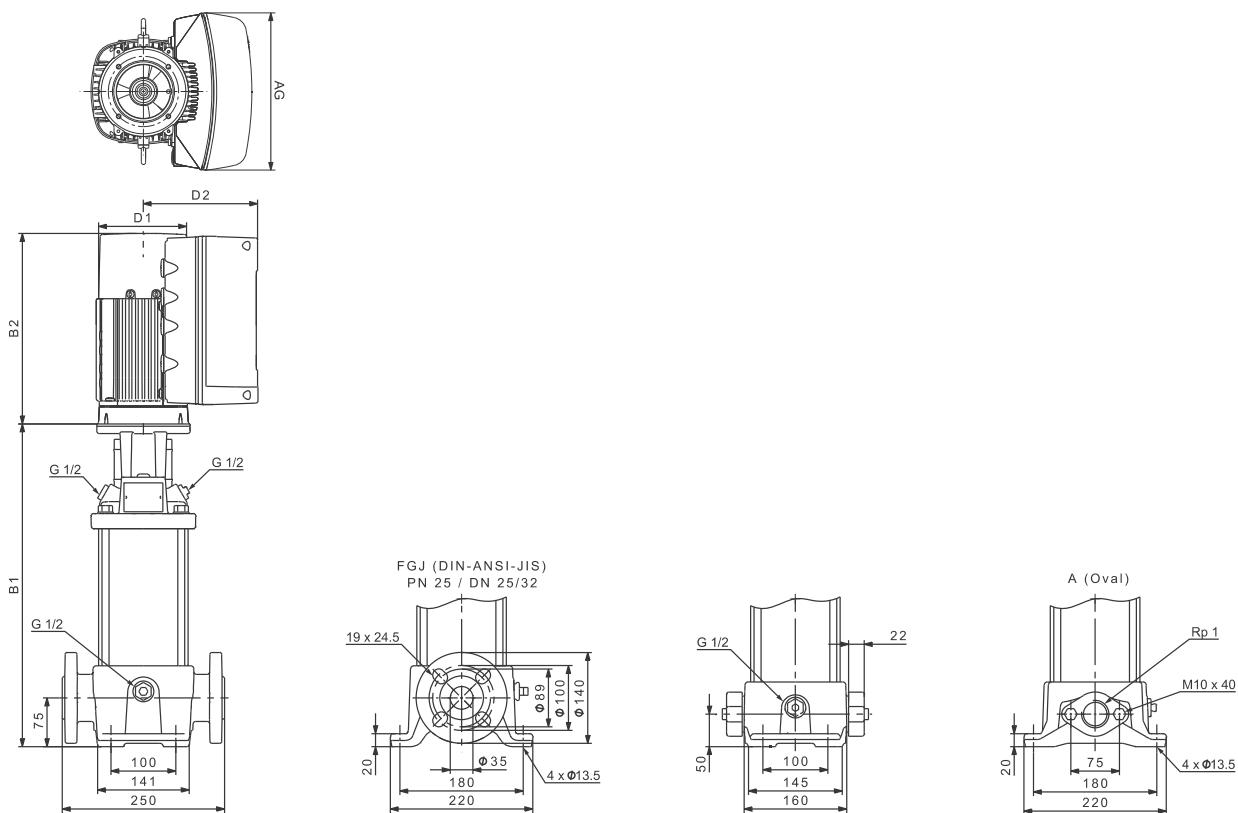
7. Performance curves and technical data

CRE 1



TM05 6833 0313

Dimensional sketches



TM05 9394 3713

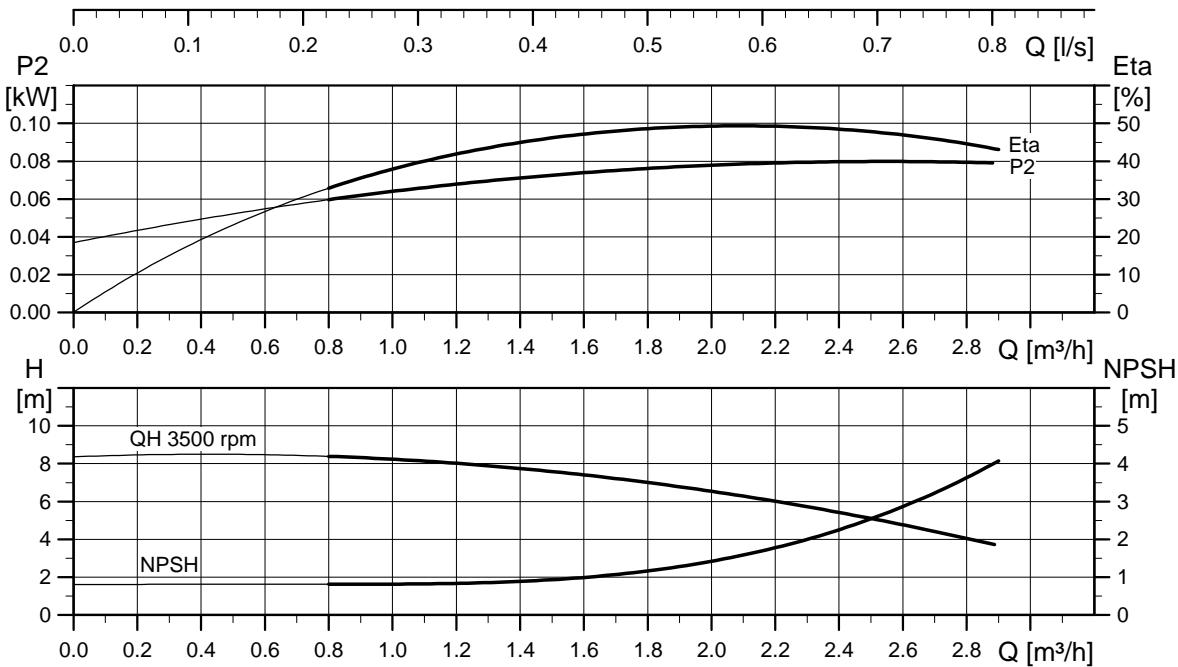
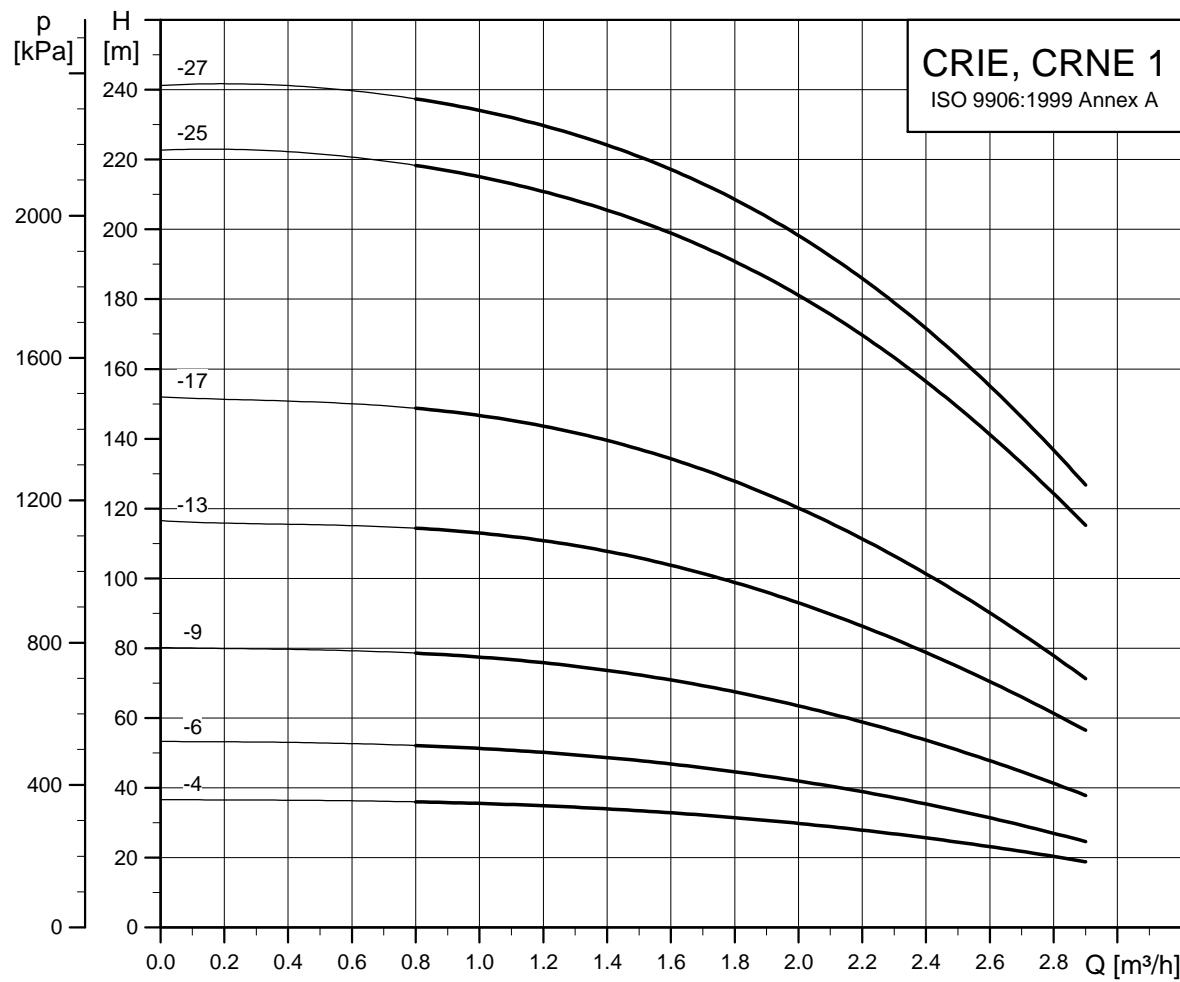
Dimensions and weights

Pump type	P_2 [kW]	CRE							Net weight [kg]	
		Dimension [mm]				D1	D2	AG		
		Oval flange		DIN flange						
B1	B1+B2	B1	B1+B2	D1	D2	AG	Oval flange	DIN flange		
CRE 1-4	0,37	272	486	297	511	122	158	212	22	26
CRE 1-6	0,55	308	522	333	547	122	158	212	22	27
CRE 1-9	0,75	368	582	393	607	122	158	212	24	29
CRE 1-13	1,1	440	654	465	679	122	158	212	27	31
CRE 1-17	1,5	528	802	553	827	122	158	268	33	38
CRE 1-25	2,2	-	-	697	971	178	167	268	-	42
CRE 1-27	3	-	-	737	1072	191	201	291	-	59

Pumps fitted with single-phase MGE motors (0.37, 0.55, 0.75 or 1.1 kW) can as an option be fitted with three-phase MGE motors.

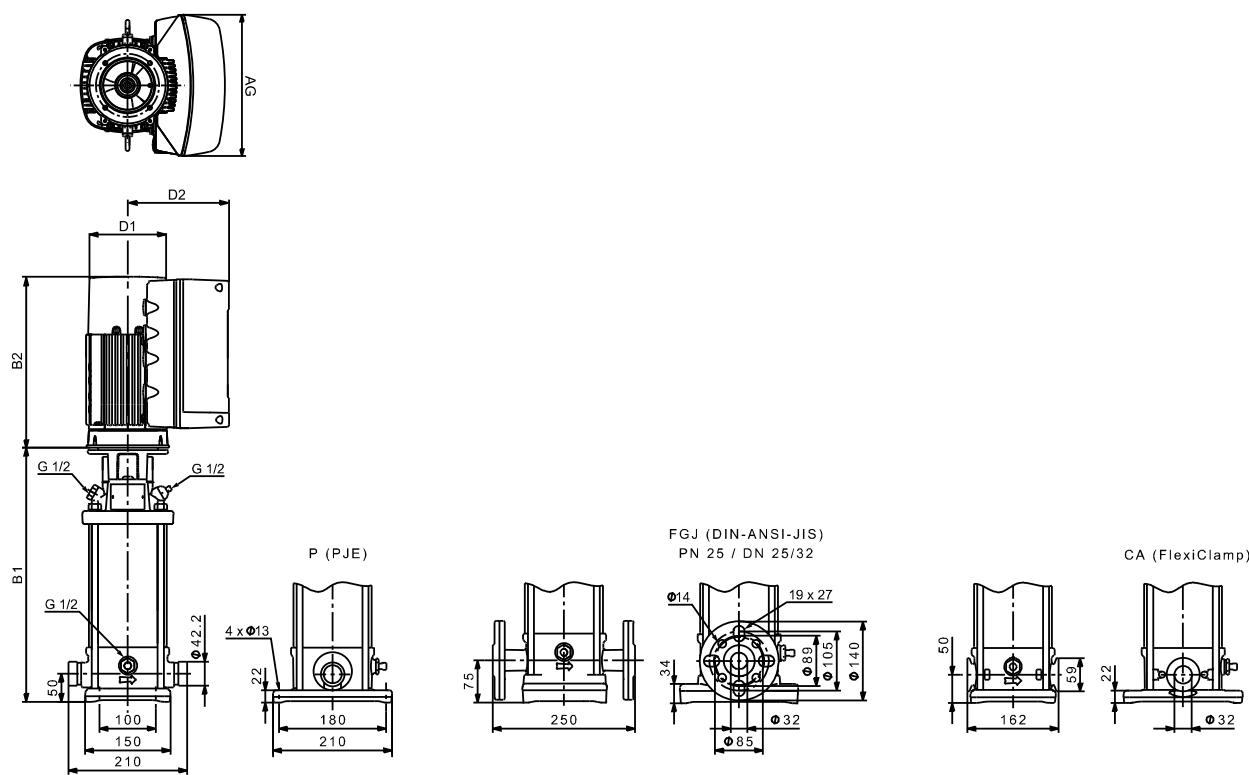
Pumps fitted with 1.5 kW three-phase MGE motors can as an option be fitted with single-phase MGE motors.

See Grundfos Product Center.

CRIE, CRNE 1

TM05 6834 0313

Dimensional sketches



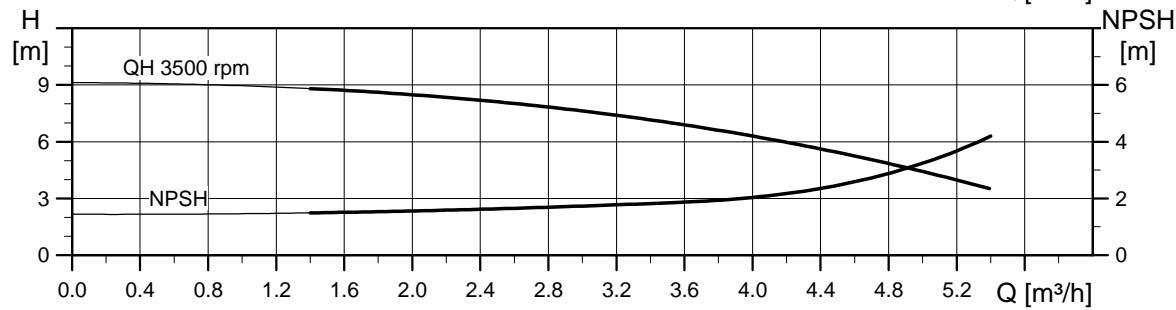
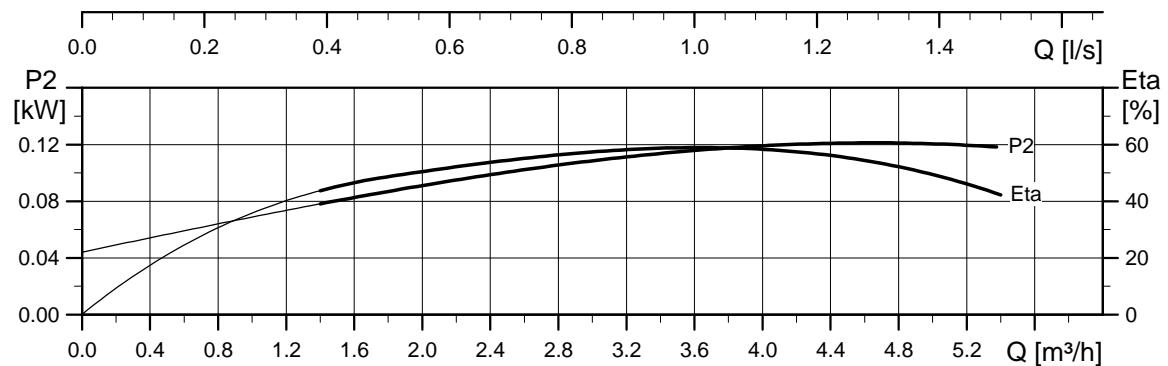
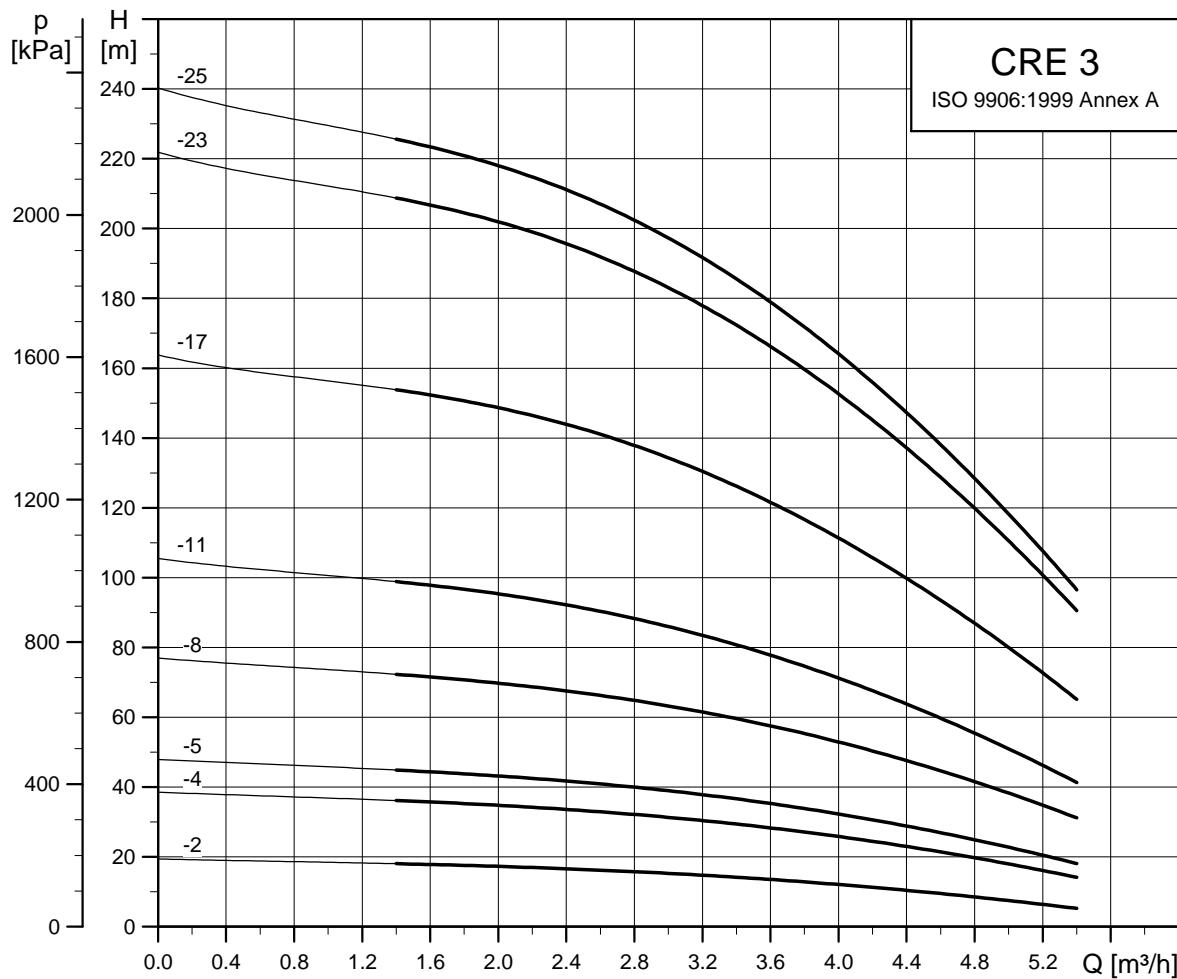
Dimensions and weights

Pump type	P_2 [kW]	CRE						Net weight [kg]		
		Dimension [mm]				D1	D2	AG	PJE/CA	DIN flange
		PJE/CA		DIN flange						
B1	B1+B2	B1	B1+B2							
CRIE/CRNE 1-4	0.37	275	489	300	514	122	158	212	20	24
CRIE/CRNE 1-6	0.55	311	525	336	550	122	158	212	21	25
CRIE/CRNE 1-9	0.75	371	585	396	610	122	158	212	23	27
CRIE/CRNE 1-13	1.1	443	657	468	682	122	158	212	26	30
CRIE/CRNE 1-17	1.5	531	805	556	830	122	158	268	31	35
CRIE/CRNE 1-25	2.2	675	949	700	974	122	158	268	36	40
CRIE/CRNE 1-27	3	716	1050	741	1075	191	201	291	44	48

Pumps fitted with single-phase MGE motors (0.37, 0.55, 0.75 or 1.1 kW) can as an option be fitted with three-phase MGE motors.

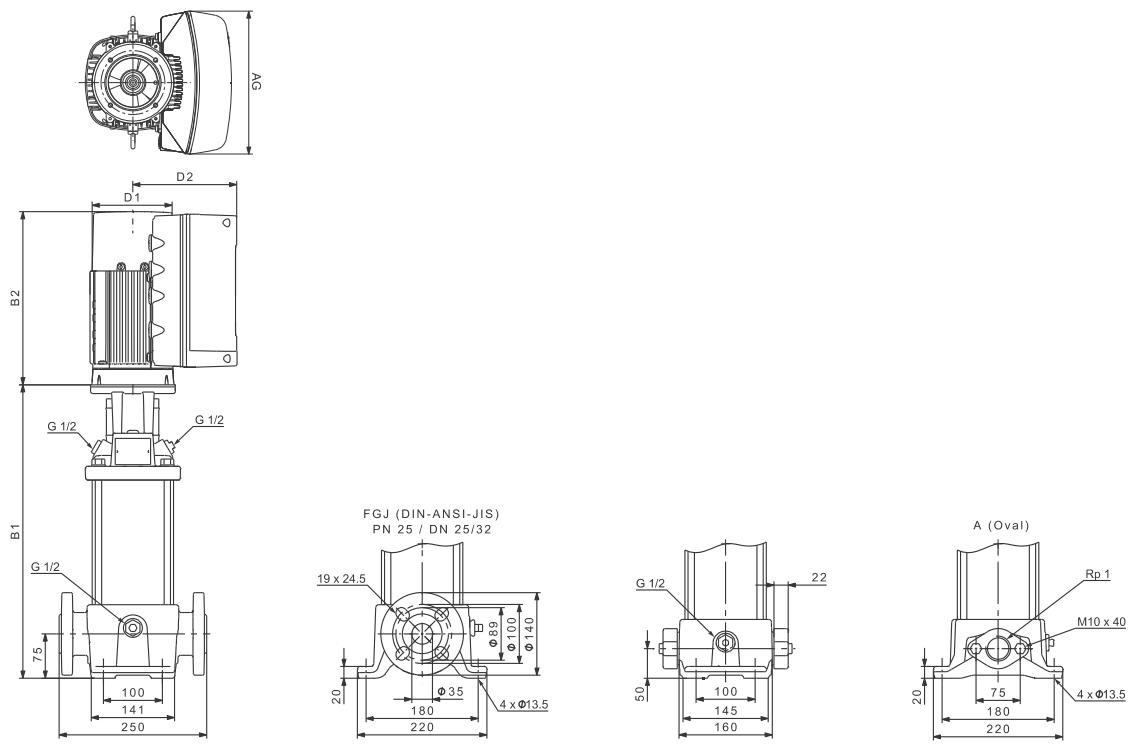
Pumps fitted with 1.5 kW three-phase MGE motors can as an option be fitted with single-phase MGE motors.

See Grundfos Product Center for dimensions.

CRE 3

TM05 6835 0313

Dimensional sketches



TM05 9394 3713

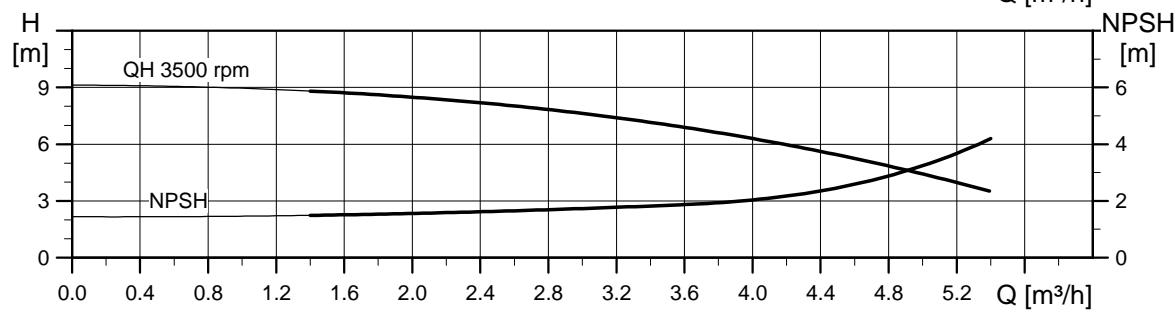
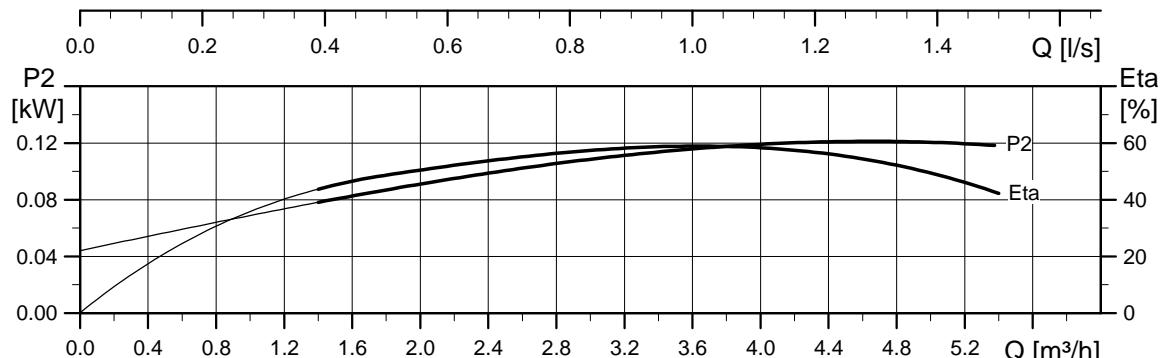
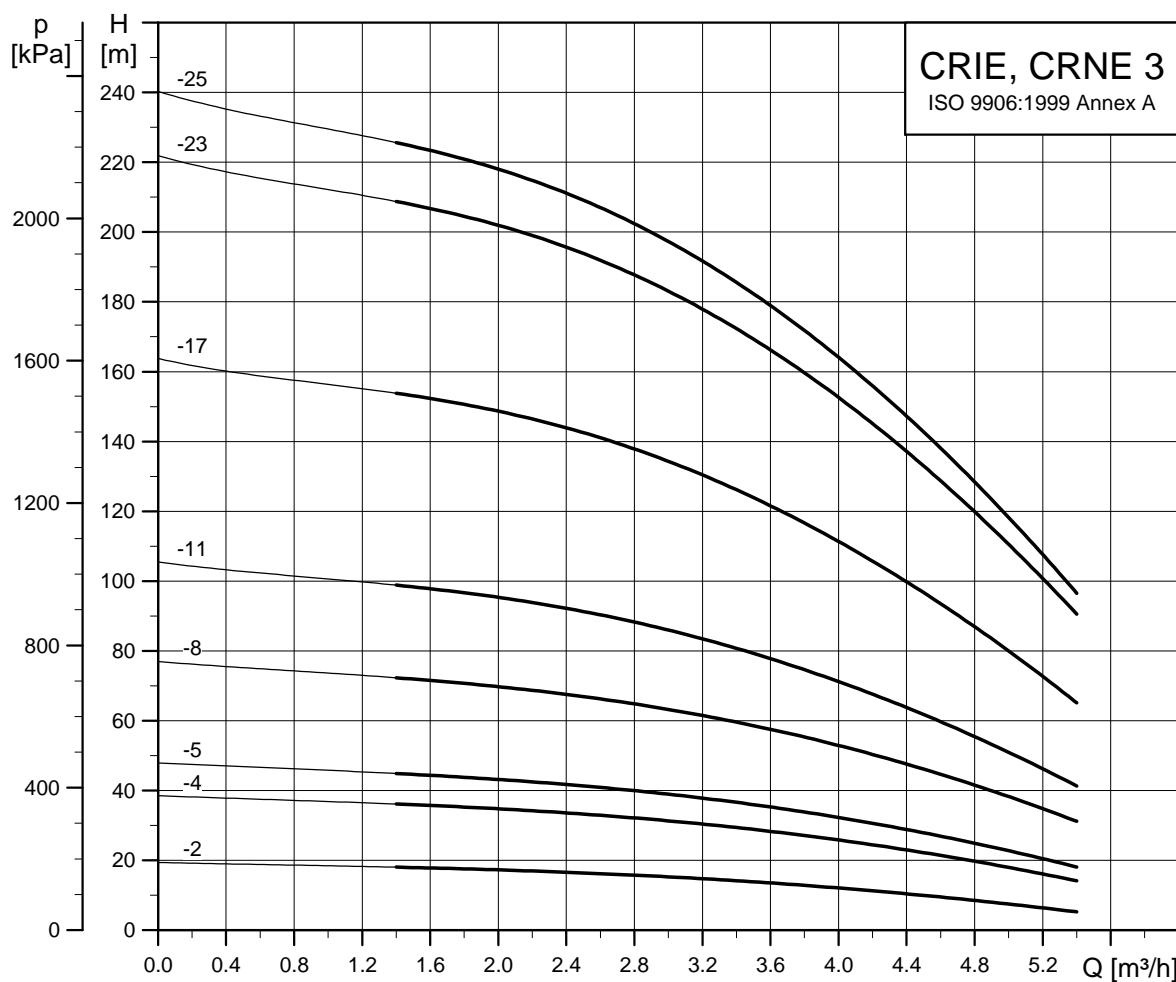
Dimensions and weights

Pump type	P_2 [kW]	CRE								
		Dimension [mm]				Net weight [kg]				
		Oval flange		DIN flange		D1	D2	AG	Oval flange	DIN flange
B1	B1+B2	B1	B1+B2							
CRE 3-2	0.37	254	468	279	493	122	158	212	21	26
CRE 3-4	0.55	272	486	297	511	122	158	212	22	26
CRE 3-5	0.75	296	510	321	535	122	158	212	23	27
CRE 3-8	1.1	350	564	375	589	122	158	212	25	29
CRE 3-11	1.5	420	694	445	719	122	158	268	31	35
CRE 3-17	2.2	528	849	553	827	122	158	268	46	39
CRE 3-23	3	-	-	665	999	191	201	291	-	48
CRE 3-25	4	-	-	701	1035	191	201	291	-	57

Pumps fitted with single-phase MGE motors (0.37, 0.55, 0.75 or 1.1 kW) can as an option be fitted with three-phase MGE motors.

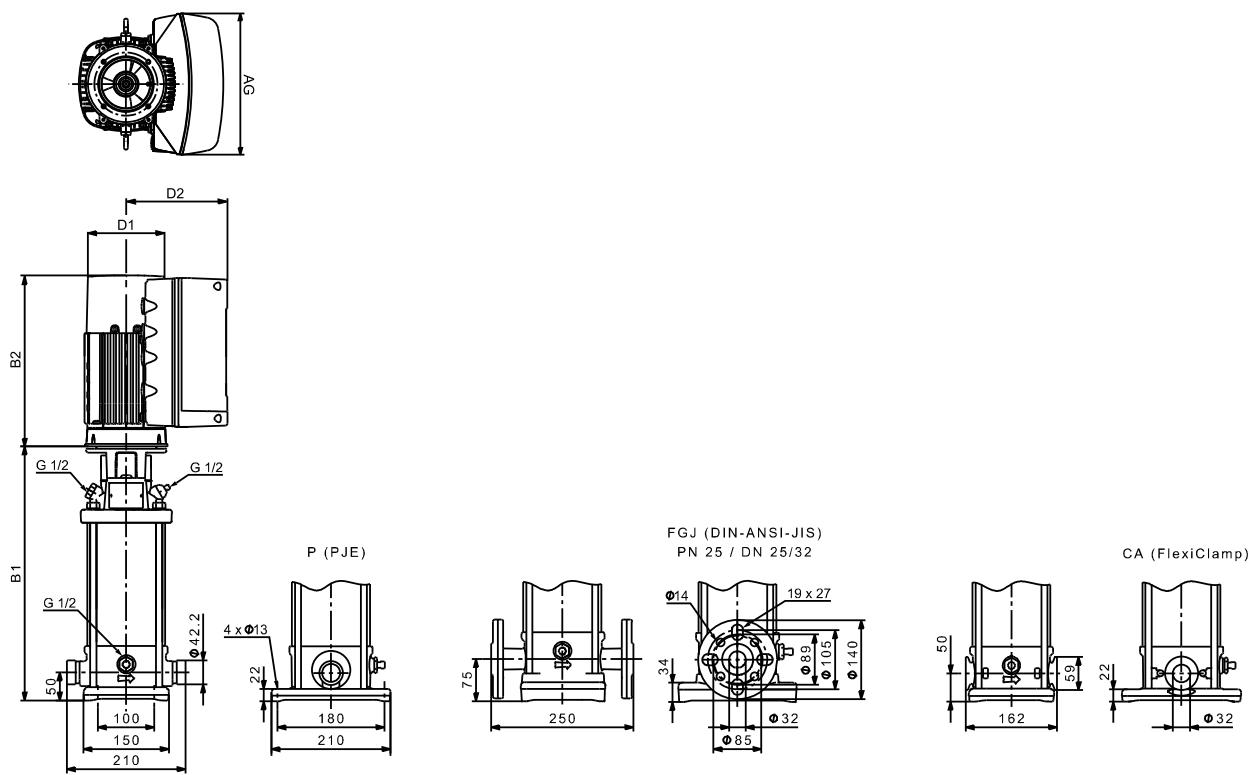
Pumps fitted with 1.5 kW three-phase MGE motors can as an option be fitted with single-phase MGE motors.

See Grundfos Product Center for dimensions.

CRIE, CRNE 3

TM05 6836 0313

Dimensional sketches



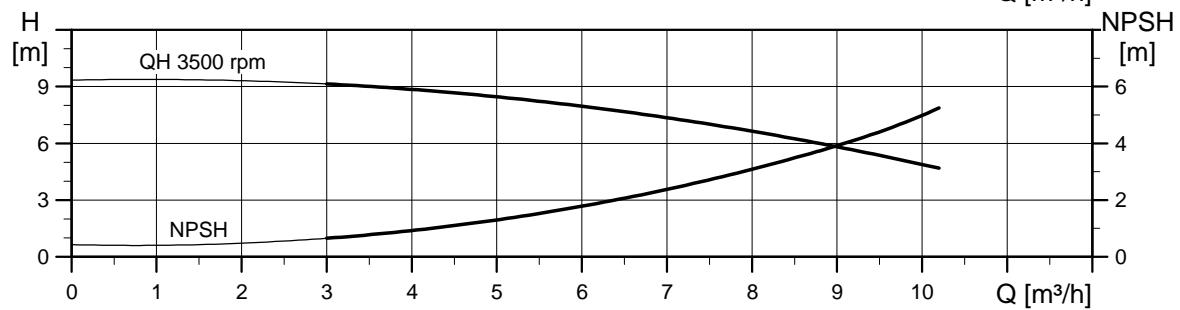
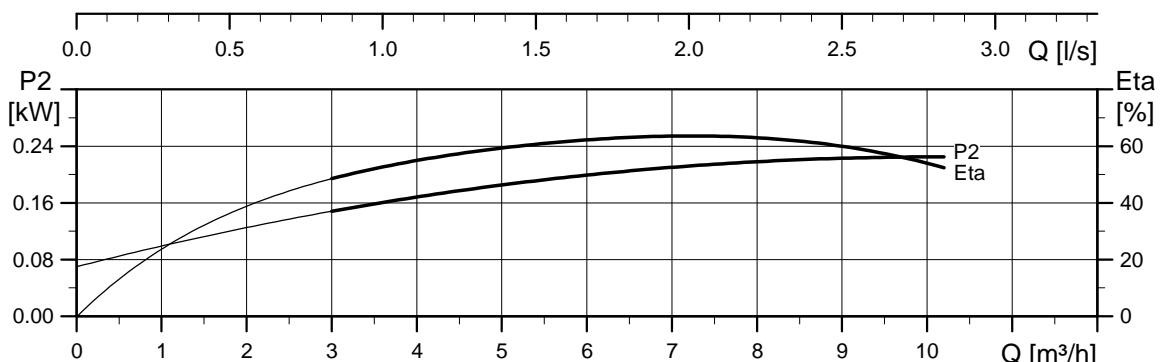
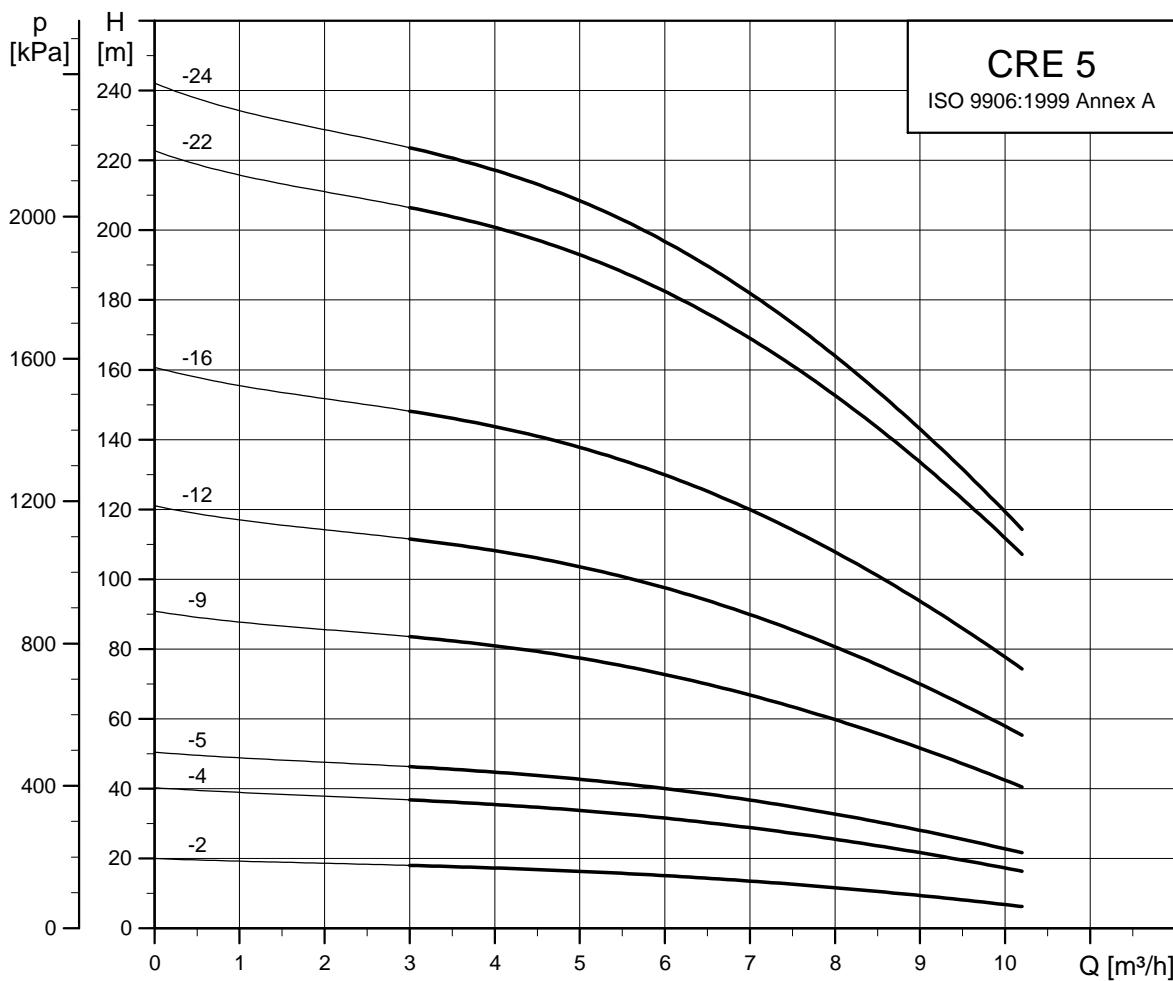
Dimensions and weights

Pump type	P_2 [kW]	CRIE/CRNE								
		Dimension [mm]				Net weight [kg]				
		PJE/CA		DIN flange		D1	D2	AG	PJE/CA	
B1	B1+B2	B1	B1+B2						DIN flange	
CRIE/CRNE 3-2	0.37	257	471	282	496	122	158	212	19	23
CRIE/CRNE 3-4	0.55	275	489	300	514	122	158	212	20	24
CRIE/CRNE 3-5	0.75	299	513	324	538	122	158	212	22	26
CRIE/CRNE 3-8	1.1	353	567	378	592	122	158	212	24	28
CRIE/CRNE 3-11	1.5	423	657	448	682	122	158	268	27	31
CRIE/CRNE 3-17	2.2	531	805	556	830	122	158	268	33	37
CRIE/CRNE 3-23	3	644	978	669	1003	191	201	291	42	46
CRIE/CRNE 3-23	3	644	978	705	1039	191	201	291	42	55

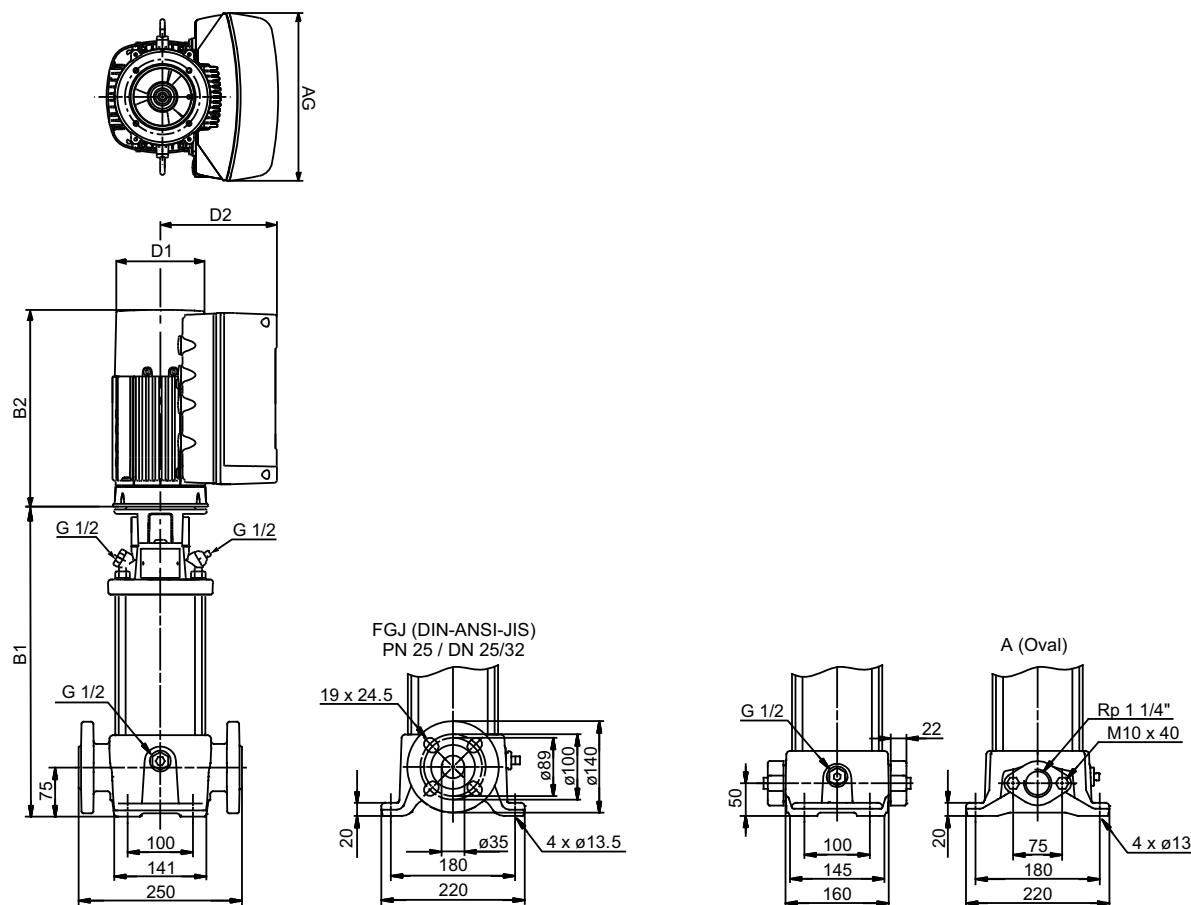
Pumps fitted with single-phase MGE motors (0.37, 0.55, 0.75 or 1.1 kW) can as an option be fitted with three-phase MGE motors.

Pumps fitted with 1.5 kW three-phase MGE motors can as an option be fitted with single-phase MGE motors.

See Grundfos Product Center for dimensions.

CRE 5

TM05 6837 0313

Dimensional sketches

TM06 770 0916

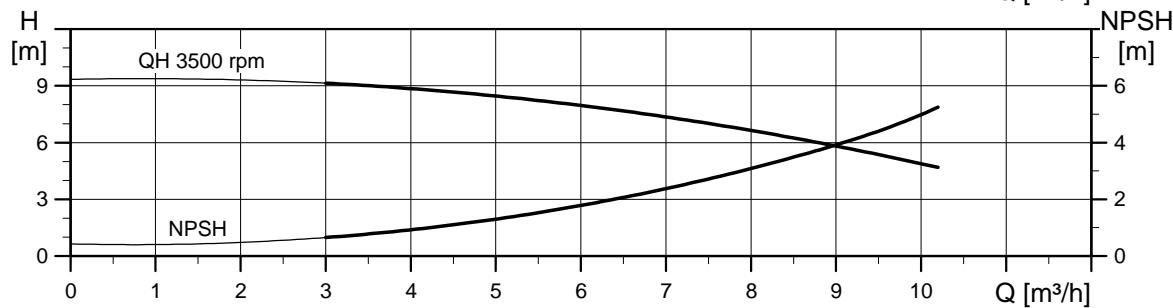
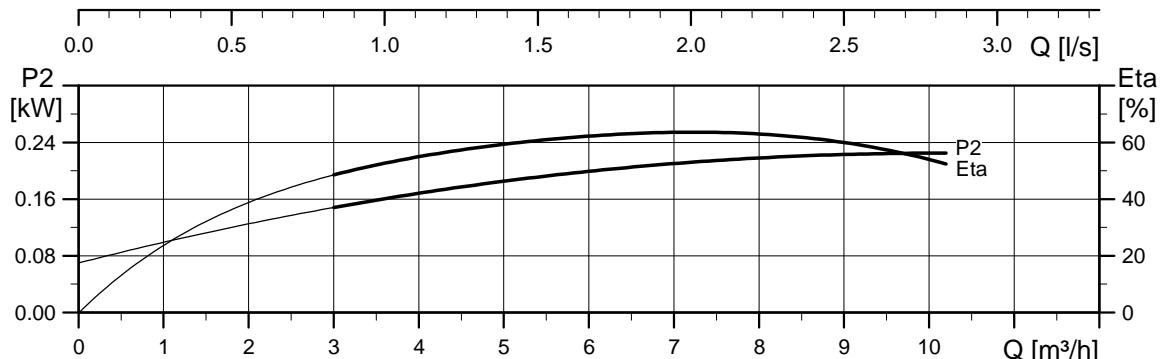
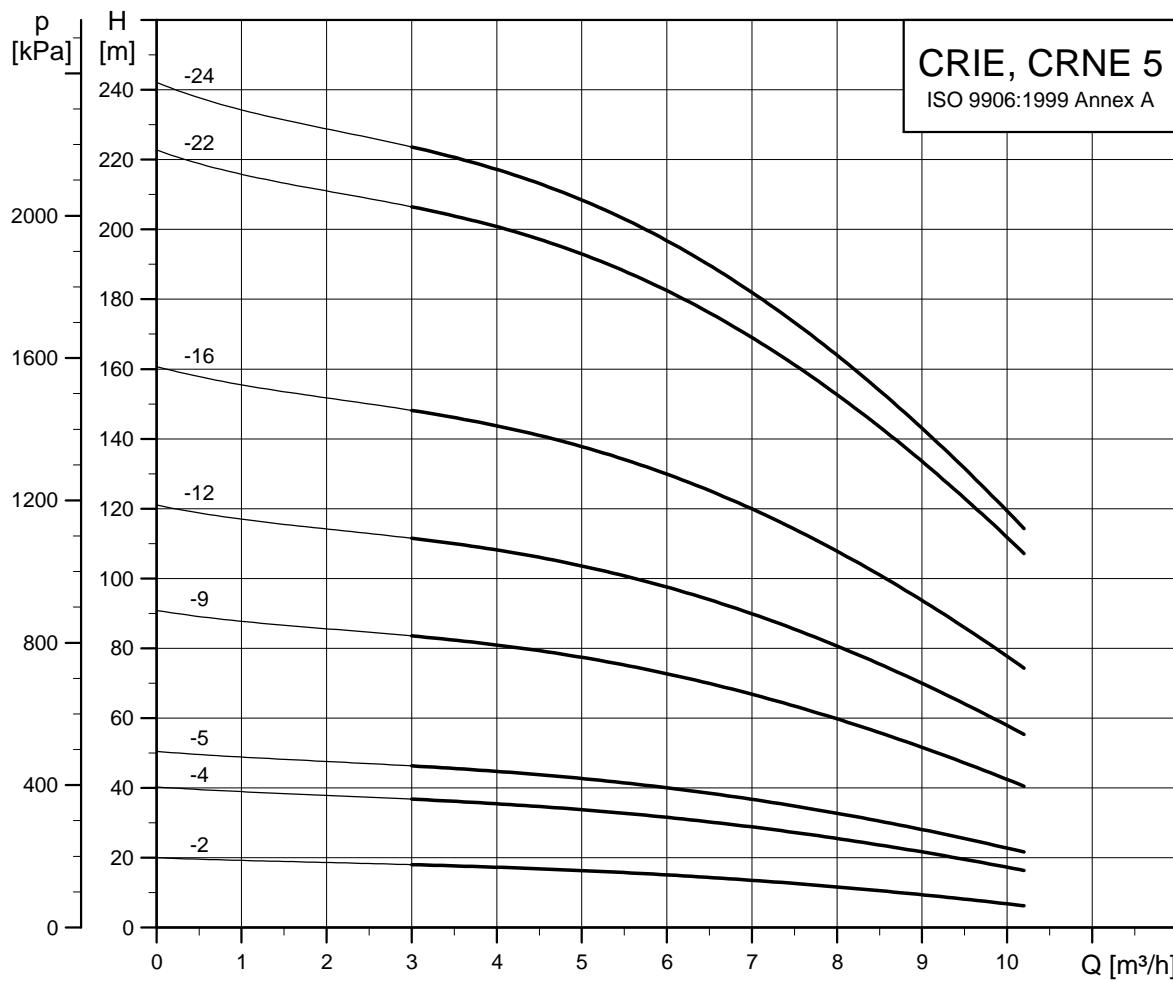
Dimensions and weights

Pump type	P ₂ [kW]	CRE								Net weight [kg]	
		Dimension [mm]				D1	D2	D3	AG	Oval flange	DIN flange
		Oval flange		DIN flange							
B1	B1+B2	B1	B1+B2	D1	D2	D3	AG	Oval flange	DIN flange		
CRE 5-2	0,55	254	468	279	493	122	158	105	212	21	26
CRE 5-4	1,1	314	528	339	553	122	158	120	212	24	28
CRE 5-5	1,5	357	631	382	656	122	158	135	268	29	34
CRE 5-9	2,2	465	739	490	764	122	158	135	268	33	37
CRE 5-12	3	550	884	575	909	191,3	201	160	291	41	46
CRE 5-16	4	658	992	683	1017	191,3	201	160	291	51	56
CRE 5-22	5,5	-	-	875	1240	191,3	201	300	291	-	74
CRE 5-24	7,5	-	-	929	1318	255	237	300	346	-	81

Pumps fitted with single-phase MGE motors (0.37, 0.55, 0.75 or 1.1 kW) can as an option be fitted with three-phase MGE motors.

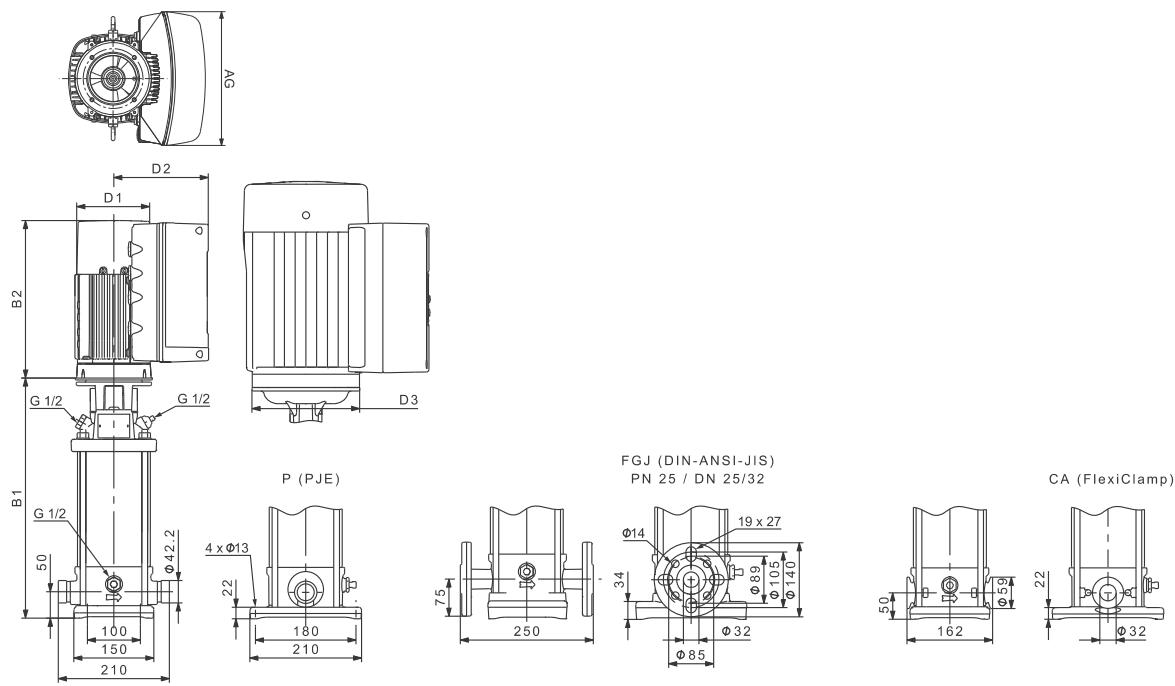
Pumps fitted with 1.5 kW three-phase MGE motors can as an option be fitted with single-phase MGE motors.

See Grundfos Product Center for dimensions.

CRIE, CRNE 5

TM05 6838 0313

Dimensional sketches



TM05 9397 373

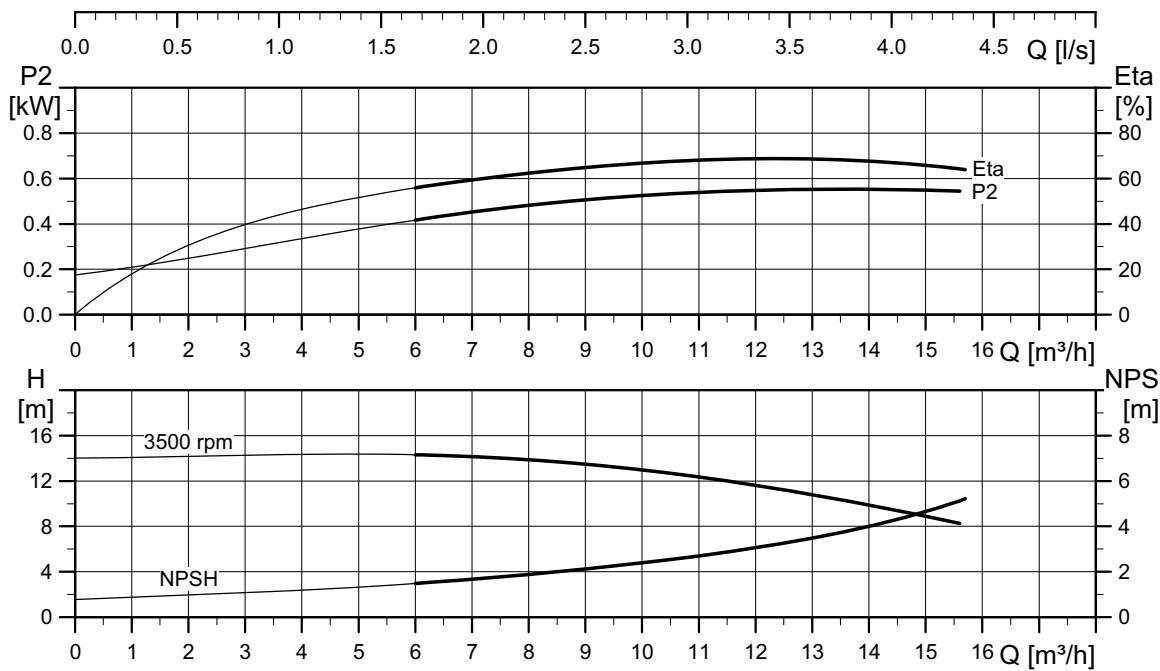
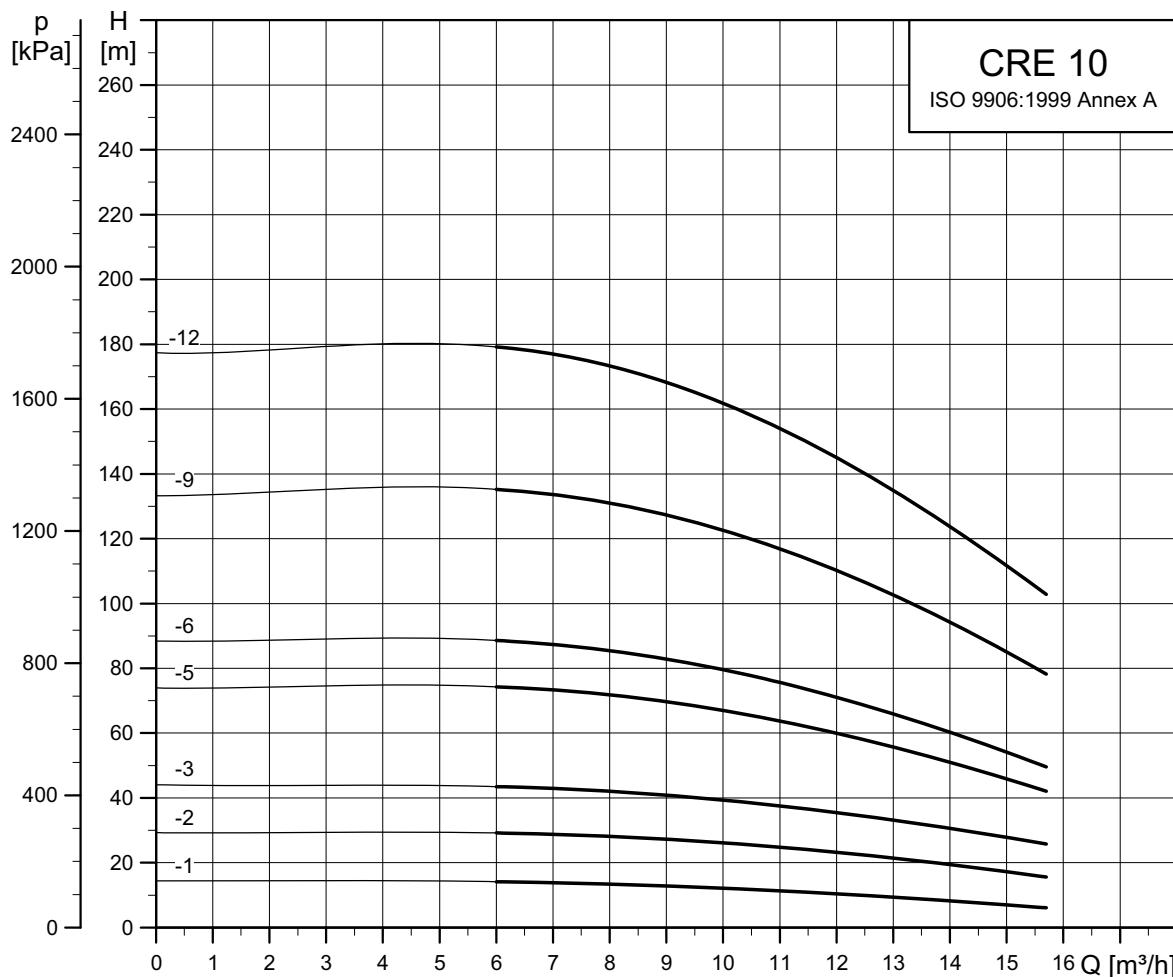
Dimensions and weights

Pump type	P_2 [kW]	CRIE/CRNE									
		Dimension [mm]				Net weight [kg]					
		PJE/CA		DIN flange		D1	D2	D3	AG	PJE/CA	DIN flange
B1	B1+B2	B1	B1+B2								
CRIE/CRNE 5-2	0.55	257	471	282	496	122	158	105	212	19	23
CRIE/CRNE 5-4	1.1	317	531	342	556	122	158	120	212	23	27
CRIE/CRNE 5-5	1.5	360	634	385	659	122	158	135	268	27	31
CRIE/CRNE 5-9	2.2	468	742	493	767	122	158	135	268	31	35
CRIE/CRNE 5-12	3	554	888	579	913	191	201	160	291	40	44
CRIE/CRNE 5-16	4	662	996	687	1021	191	201	160	291	50	54
CRIE/CRNE 5-22	5.5	853	1218	878	1243	191	201	300	291	67	71
CRIE/CRNE 5-24	7.5	907	1296	932	1321	255	237	300	346	74	78

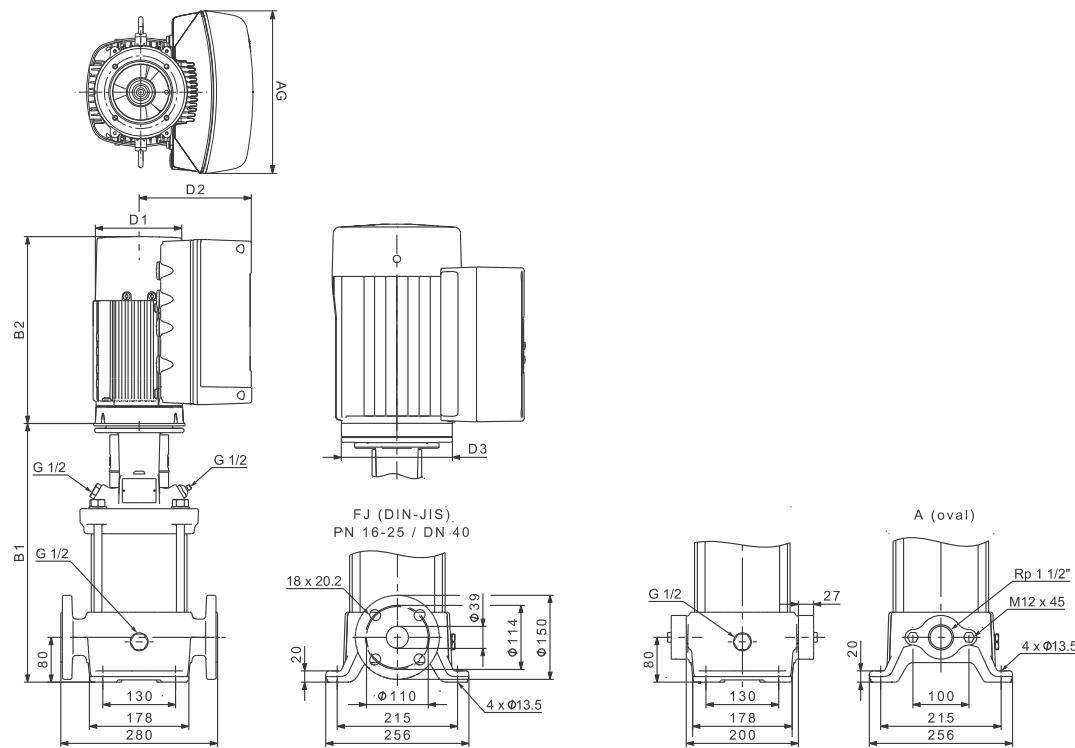
Pumps fitted with single-phase MGE motors (0.37, 0.55, 0.75 or 1.1 kW) can as an option be fitted with three-phase MGE motors.

Pumps fitted with 1.5 kW three-phase MGE motors can as an option be fitted with single-phase MGE motors.

See Grundfos Product Center for dimensions.

CRE 10

TM05 6839 0313

Dimensional sketches

TM05 9398 3713

Dimensions and weights

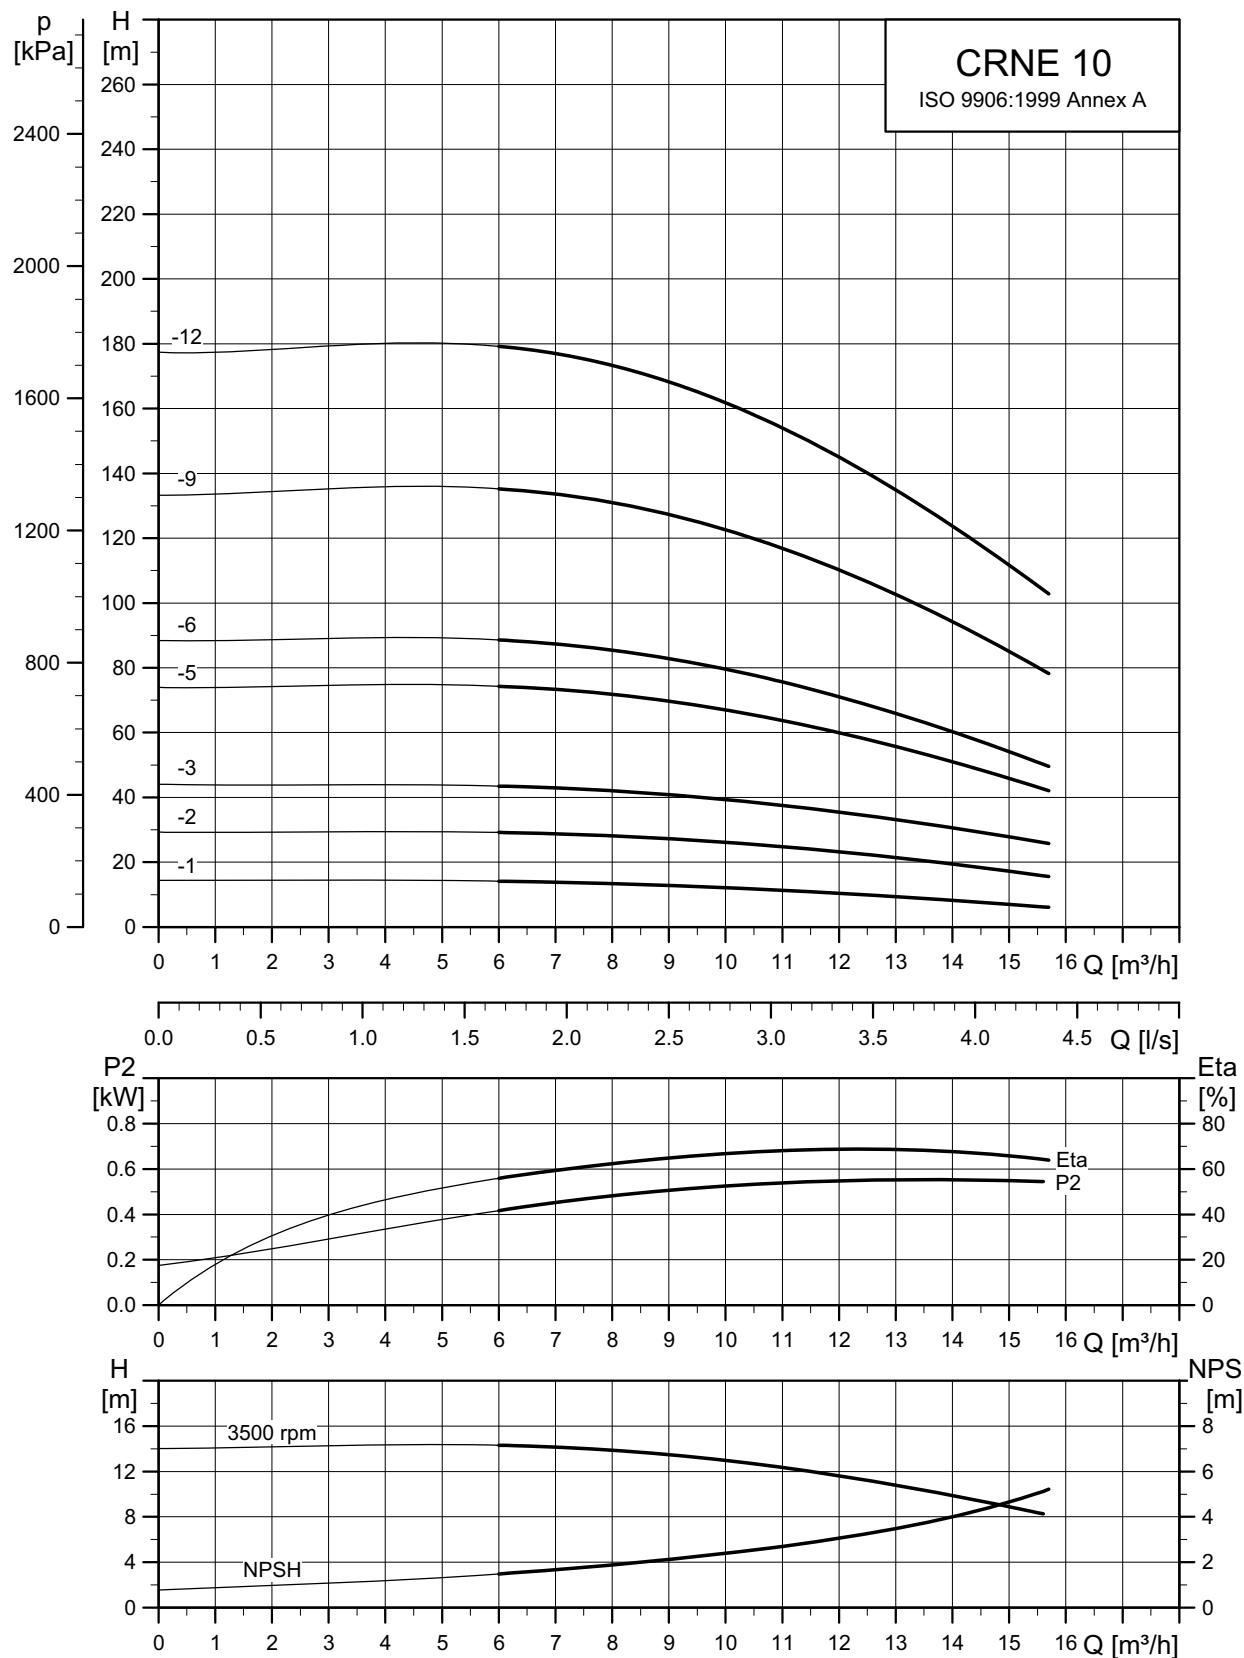
Pump type	P ₂ [kW]	CRE								Net weight [kg]	
		Oval flange		DIN flange		D1	D2	D3	AG	Oval flange	DIN flange
		B1	B1+B2	B1	B1+B2					M12 x 45	4 x Ø13.5
CRE 10-1	0.75	347	561	347	561	122	158	120	212	35	37
CRE 10-2	1.5	363	637	363	637	122	158	135	268	40	43
CRE 10-3	2.2	393	667	393	667	122	158	135	268	43	45
CRE 10-5	3	458	792	458	792	191	201	160	291	51	54
CRE 10-6	4	488	822	488	822	191	201	160	291	60	63
CRE 10-9	5.5	610	975	610	975	191	201	300	291	84	86
CRE 10-12	7.5	-	-	700	1089	255	237	300	346	-	95

Pumps fitted with single-phase MGE motors (0.37, 0.55, 0.75 or 1.1 kW) can as an option be fitted with three-phase MGE motors.

Pumps fitted with 1.5 kW three-phase MGE motors can as an option be fitted with single-phase MGE motors.

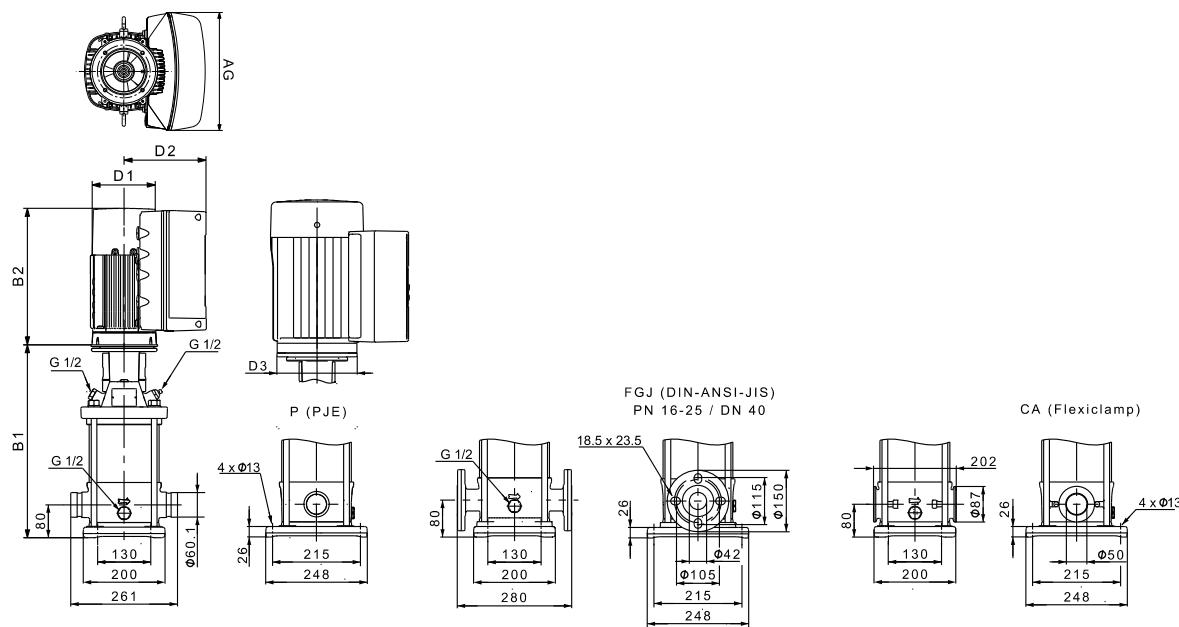
See Grundfos Product Center for dimensions.

CRE, CRIE, CRNE 10



TM05 6840 0313

Dimensional sketches



TM05 901 3713

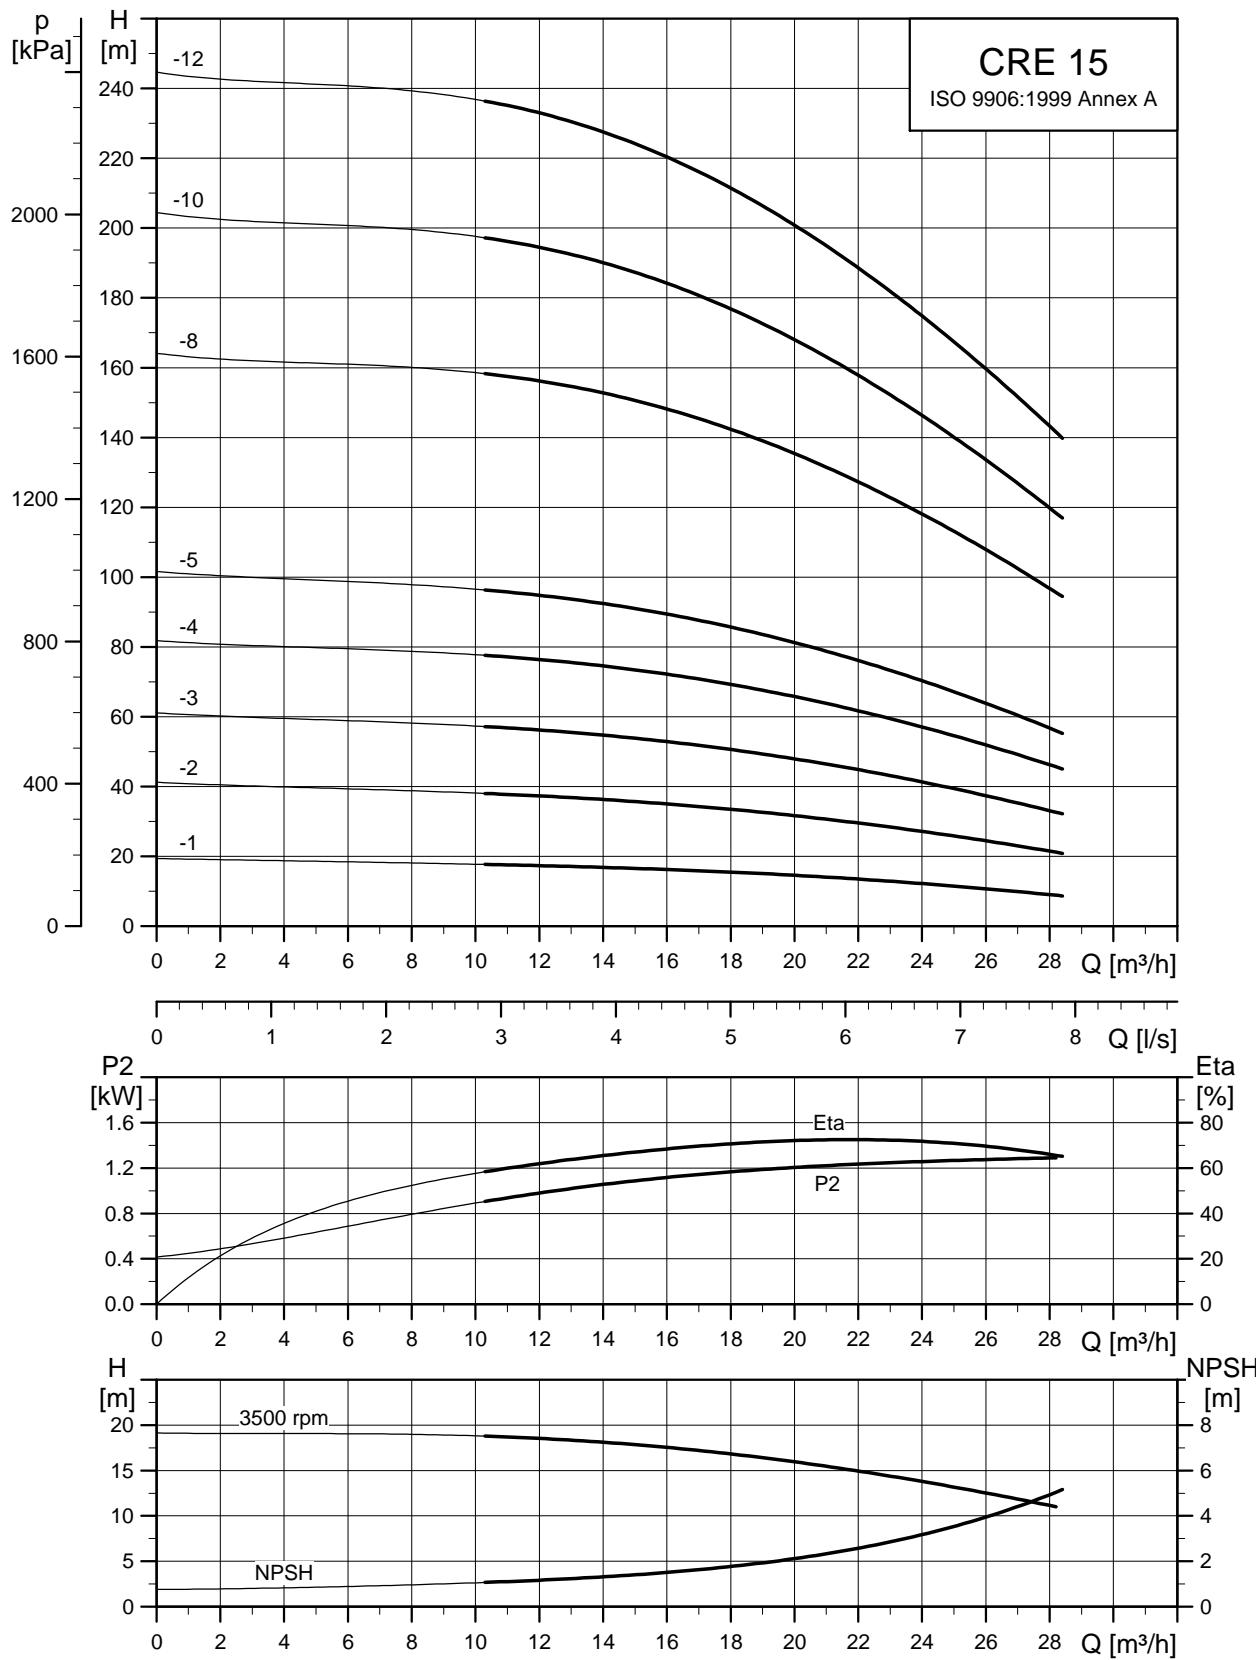
Dimensions and weights

Pump type	P_2 [kW]	CRIE/CRNE								Net weight [kg]	
		PJE/CA		DIN flange		D1	D2	D3	AG		
		B1	B1+B2	B1	B1+B2						
CRIE/CRNE 10-1	0.75	357	571	357	571	122	158	120	212	32	
CRIE/CRNE 10-2	1.5	373	647	373	647	122	158	135	268	38	
CRIE/CRNE 10-3	2.2	403	677	403	677	122	158	135	268	40	
CRIE/CRNE 10-5	3	468	802	468	802	191	201	160	291	49	
CRIE/CRNE 10-6	4	498	832	498	832	191	201	160	291	58	
CRIE/CRNE 10-9	5.5	620	985	620	985	191	201	300	291	81	
CRIE/CRNE 10-12	7.5	710	1099	710	1099	255	237	300	346	91	
										94	

Pumps fitted with single-phase MGE motors (0.37, 0.55, 0.75 or 1.1 kW) can as an option be fitted with three-phase MGE motors.

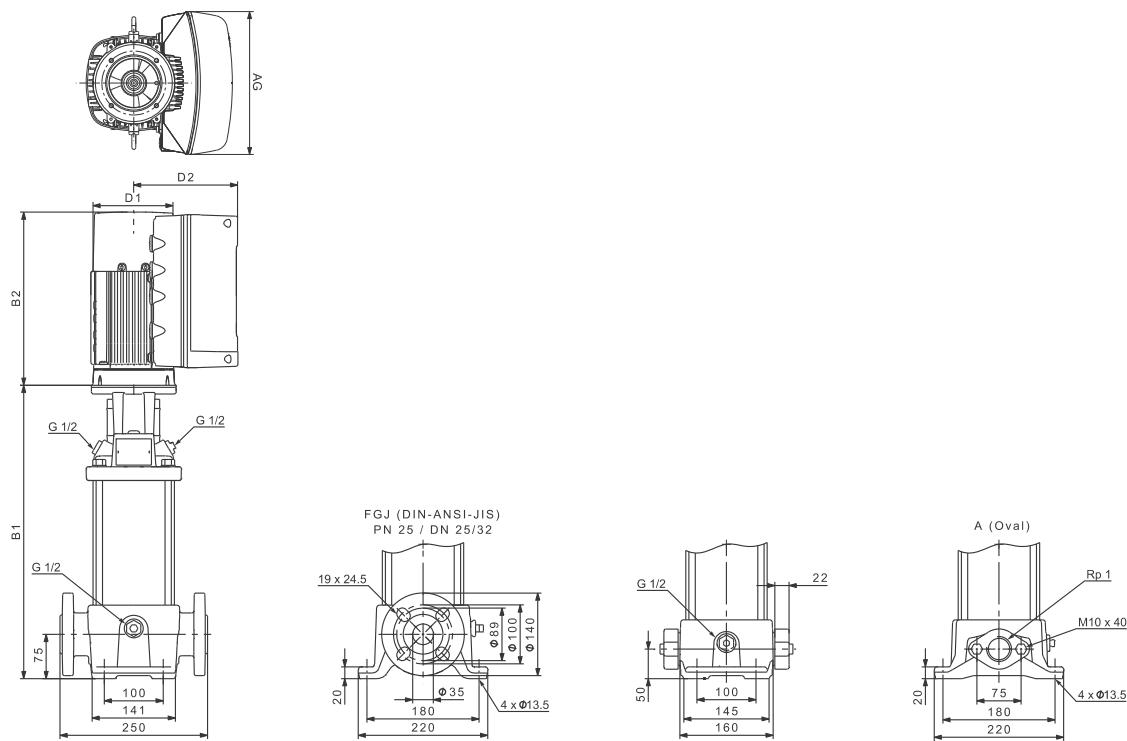
Pumps fitted with 1.5 kW three-phase MGE motors can as an option be fitted with single-phase MGE motors.

See Grundfos Product Center for dimensions.

CRE 15

TM05 6841 0313

Dimensional sketches

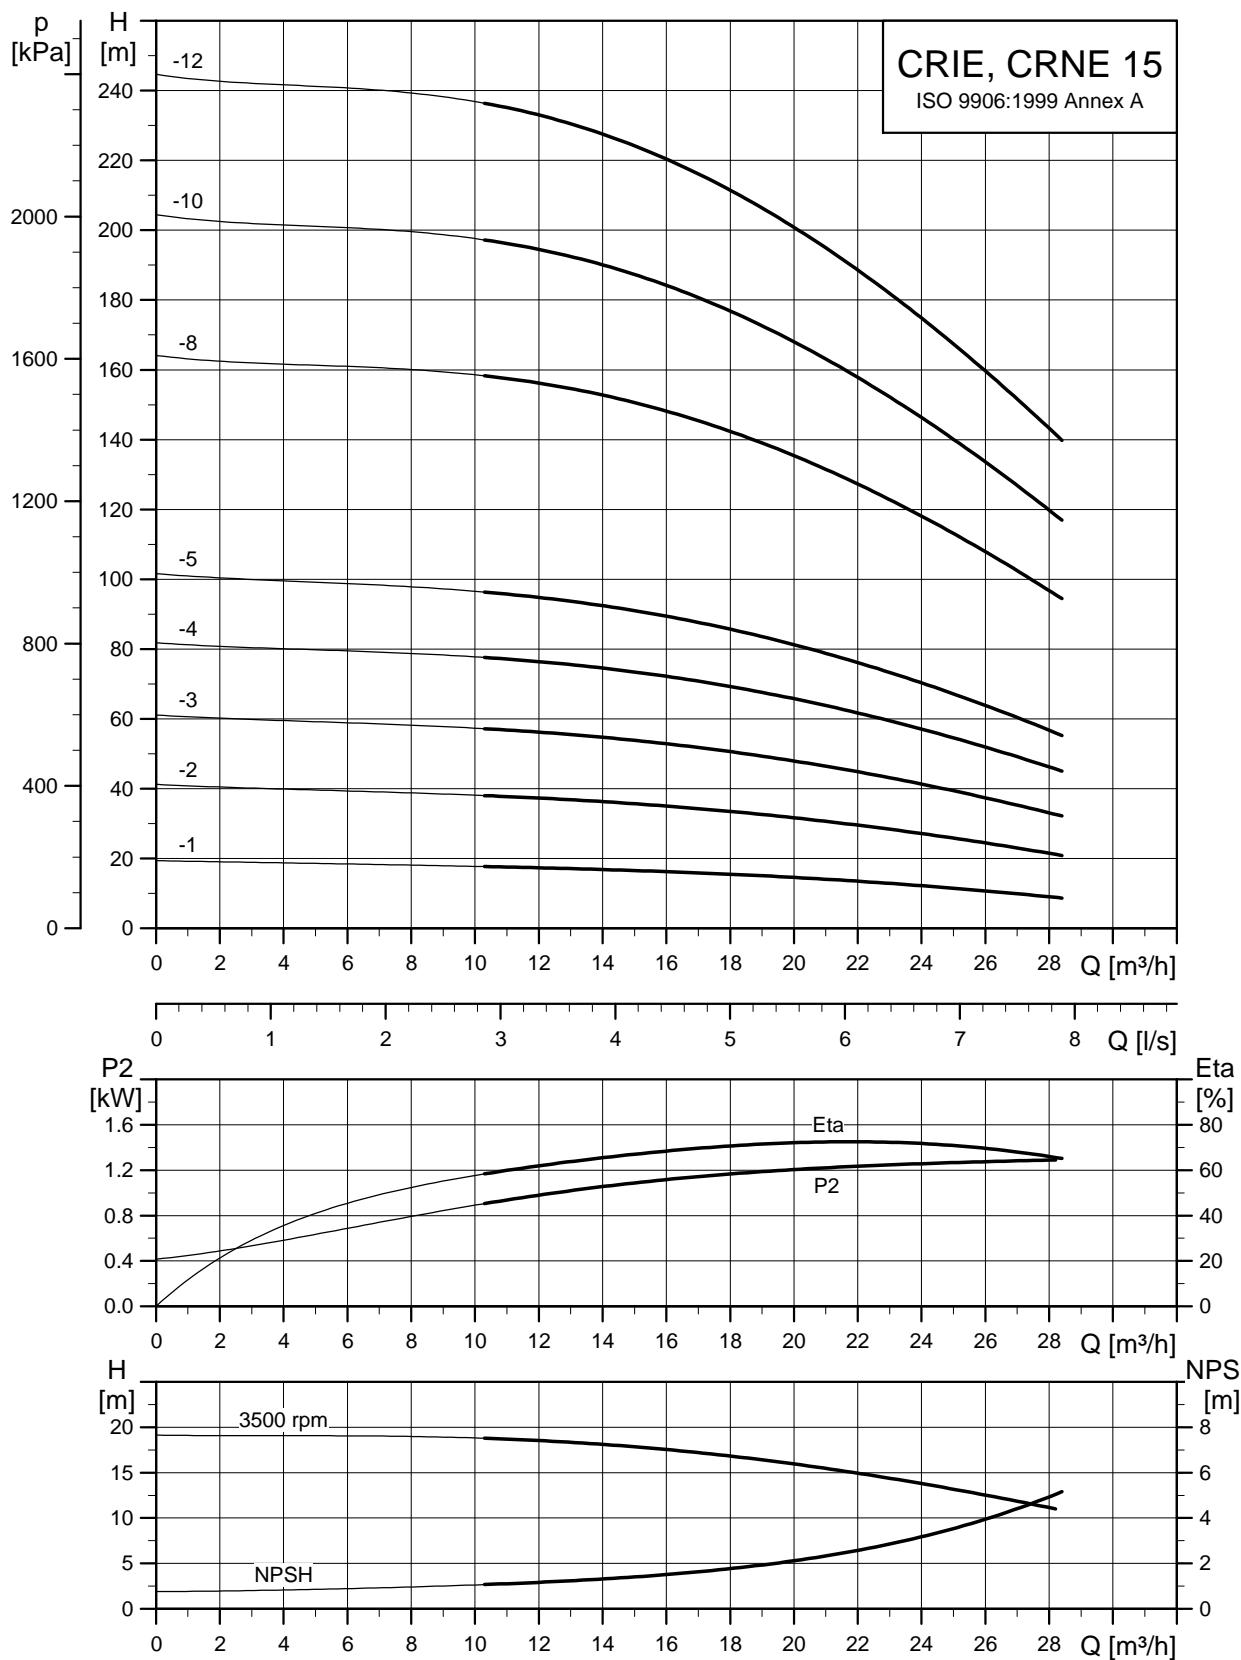


Dimensions and weights

Pump type	P_2 [kW]	CRE									
		Dimension [mm]				Net weight [kg]					
		Oval flange		DIN flange		D1	D2	D3	AG		
		B1	B1+B2	B1	B1+B2				Oval flange	DIN flange	
CRE 15-1	1.5	415	689	415	689	122	158	135	268	46	47
CRE 15-2	3	420	754	420	754	191	201	160	291	54	55
CRE 15-3	4	465	799	465	799	191	201	160	291	63	64
CRE 15-4	5.5	542	907	542	907	191	201	300	291	85	86
CRE 15-5	7.5	587	976	587	976	255	237	300	346	93	93
CRE 15-8	11	-	-	799	1205	255	237	350	346	-	122
CRE 15-10	15	-	-	904	1375	314	308	350	420	-	211
CRE 15-12	18.5	-	-	994	1509	314	308	350	420	-	226

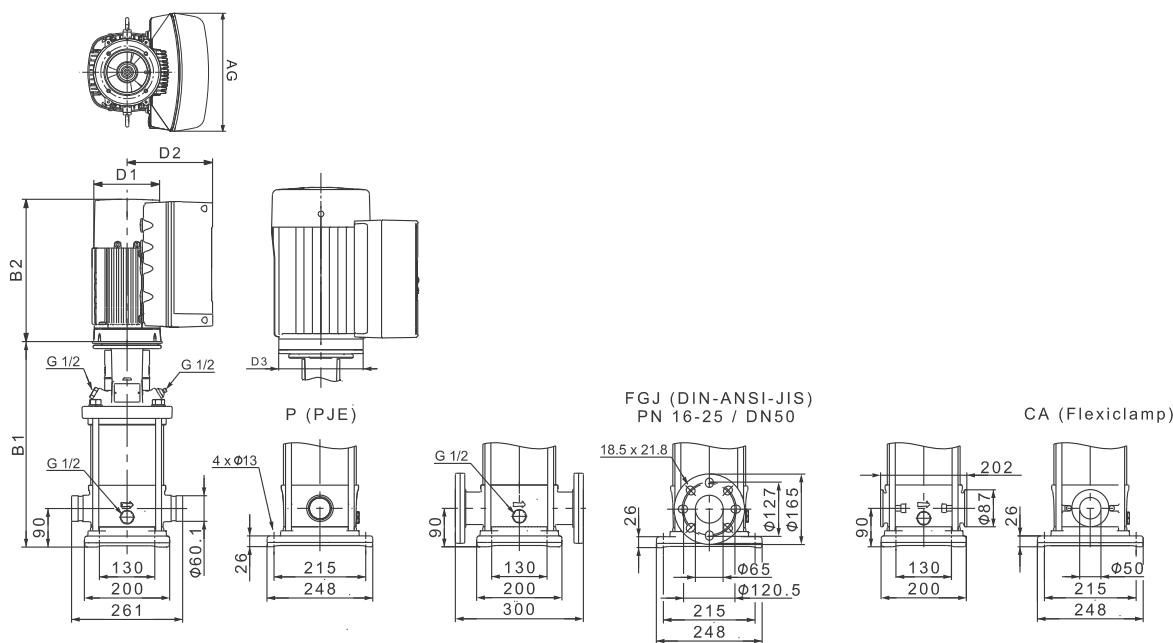
Pumps fitted with 1.5 kW three-phase MGE motors can as an option be fitted with single-phase MGE motors.
See Grundfos Product Center for dimensions.

CRIE, CRNE 15



TM50 6842 0313

Dimensional sketches

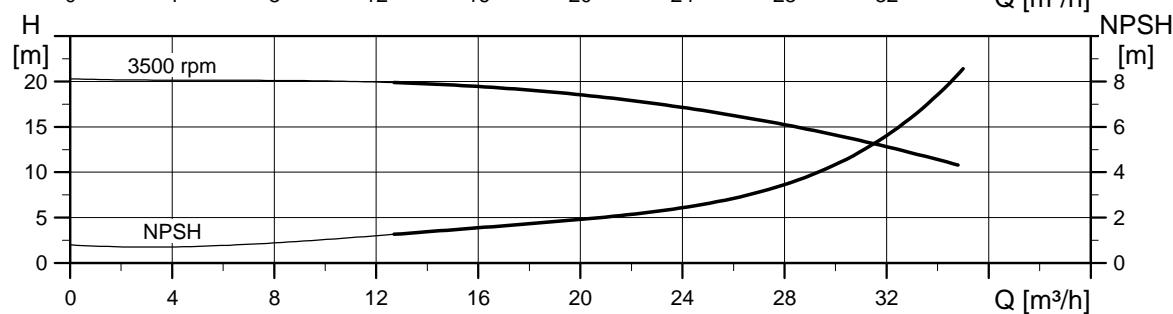
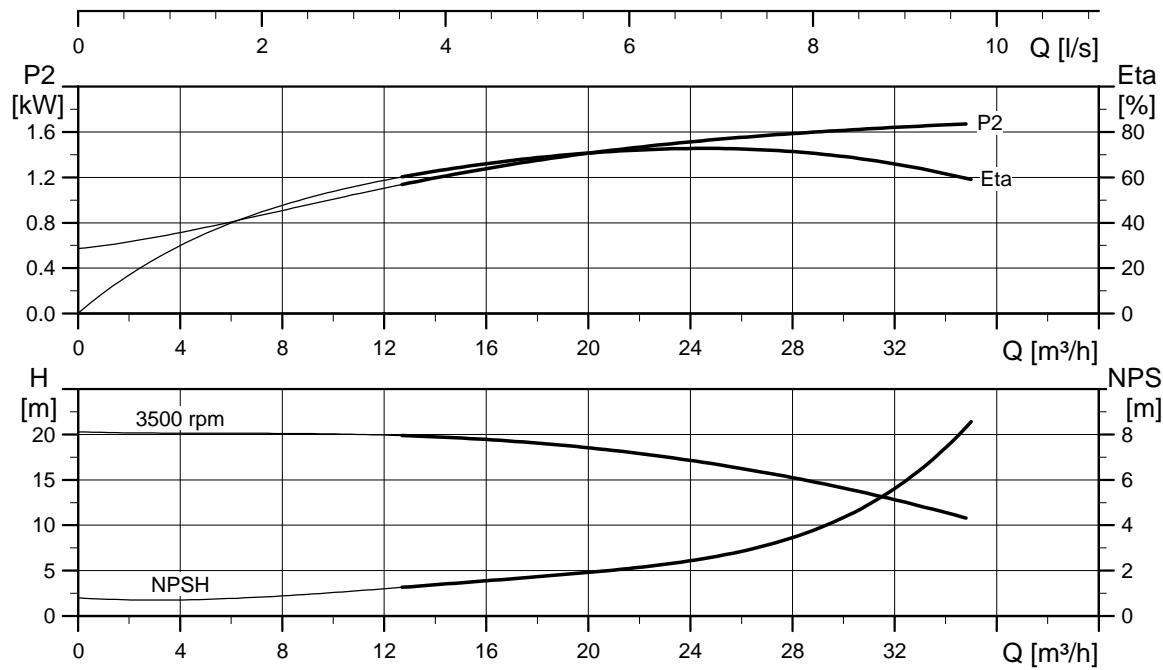
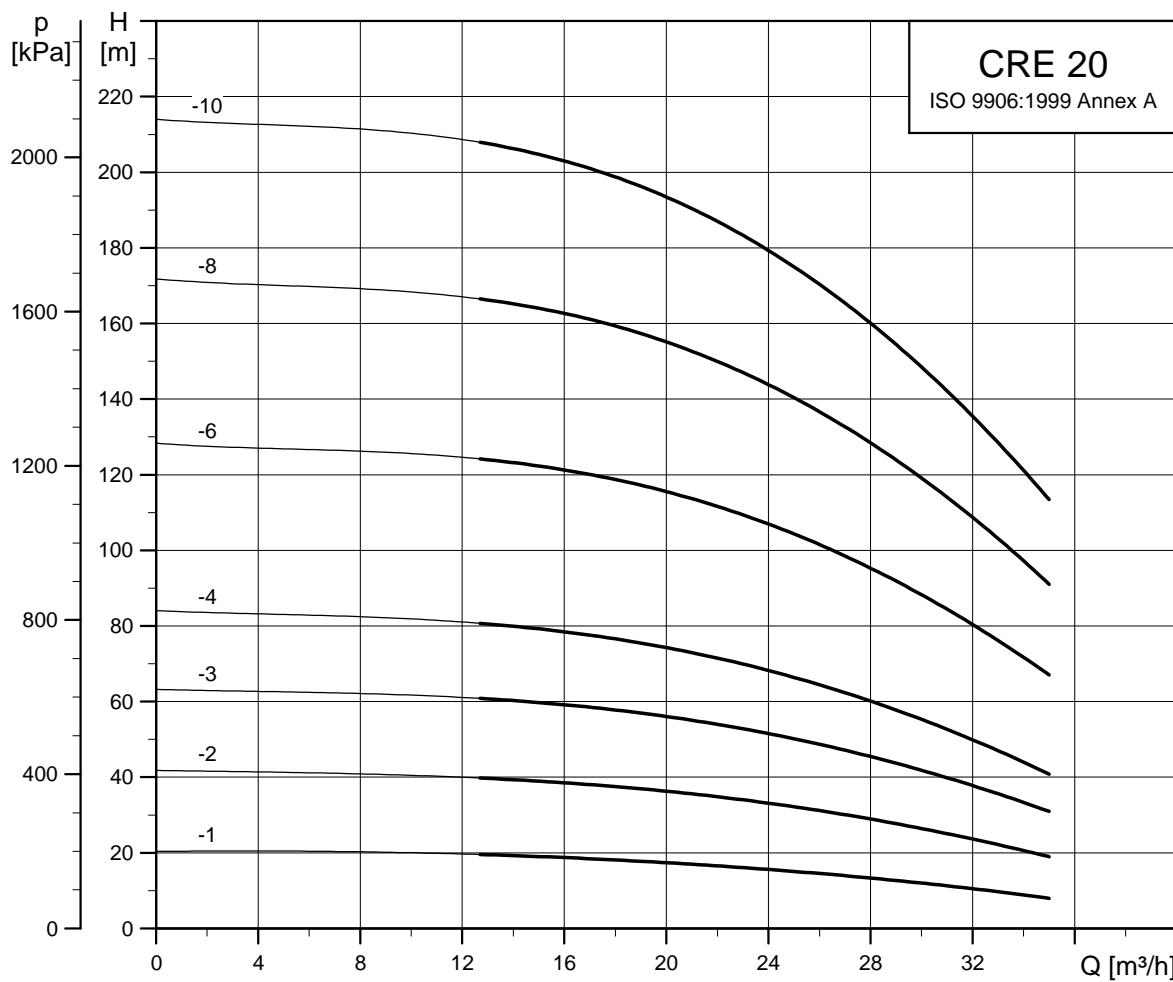


TM05 9400 3713

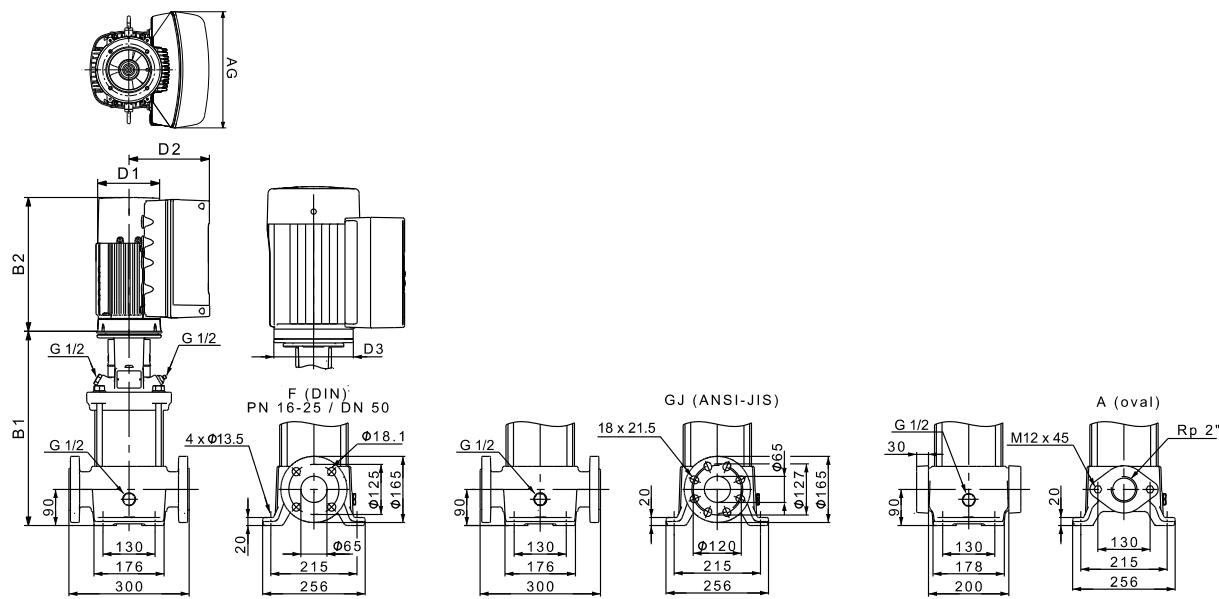
Dimensions and weights

Pump type	P_2 [kW]	CRIE/CRNE								Net weight [kg]	
		PJE/CA		DIN flange		D1	D2	D3	AG	PJE/CA	DIN flange
		B1	B1+B2	B1	B1+B2						
CRIE/CRNE 15-1	1.5	413	687	413	687	122	158	135	268	39	43
CRIE/CRNE 15-2	3	418	752	418	752	191	201	160	291	48	52
CRIE/CRNE 15-3	4	463	797	463	797	191	201	160	291	57	61
CRIE/CRNE 15-4	5.5	540	905	540	905	191	201	300	291	78	83
CRIE/CRNE 15-5	7.5	585	974	585	974	255	237	300	346	86	91
CRIE/CRNE 15-8	11	797	1203	797	1203	255	237	350	346	115	120
CRIE/CRNE 15-10	15	902	1373	902	1373	314	308	350	420	203	207
CRIE/CRNE 15-12	18.5	992	1507	992	1507	314	308	350	420	218	223

Pumps fitted with 1.5 kW three-phase MGE motors can as an option be fitted with single-phase MGE motors.
See Grundfos Product Center for dimensions.

CRE 20

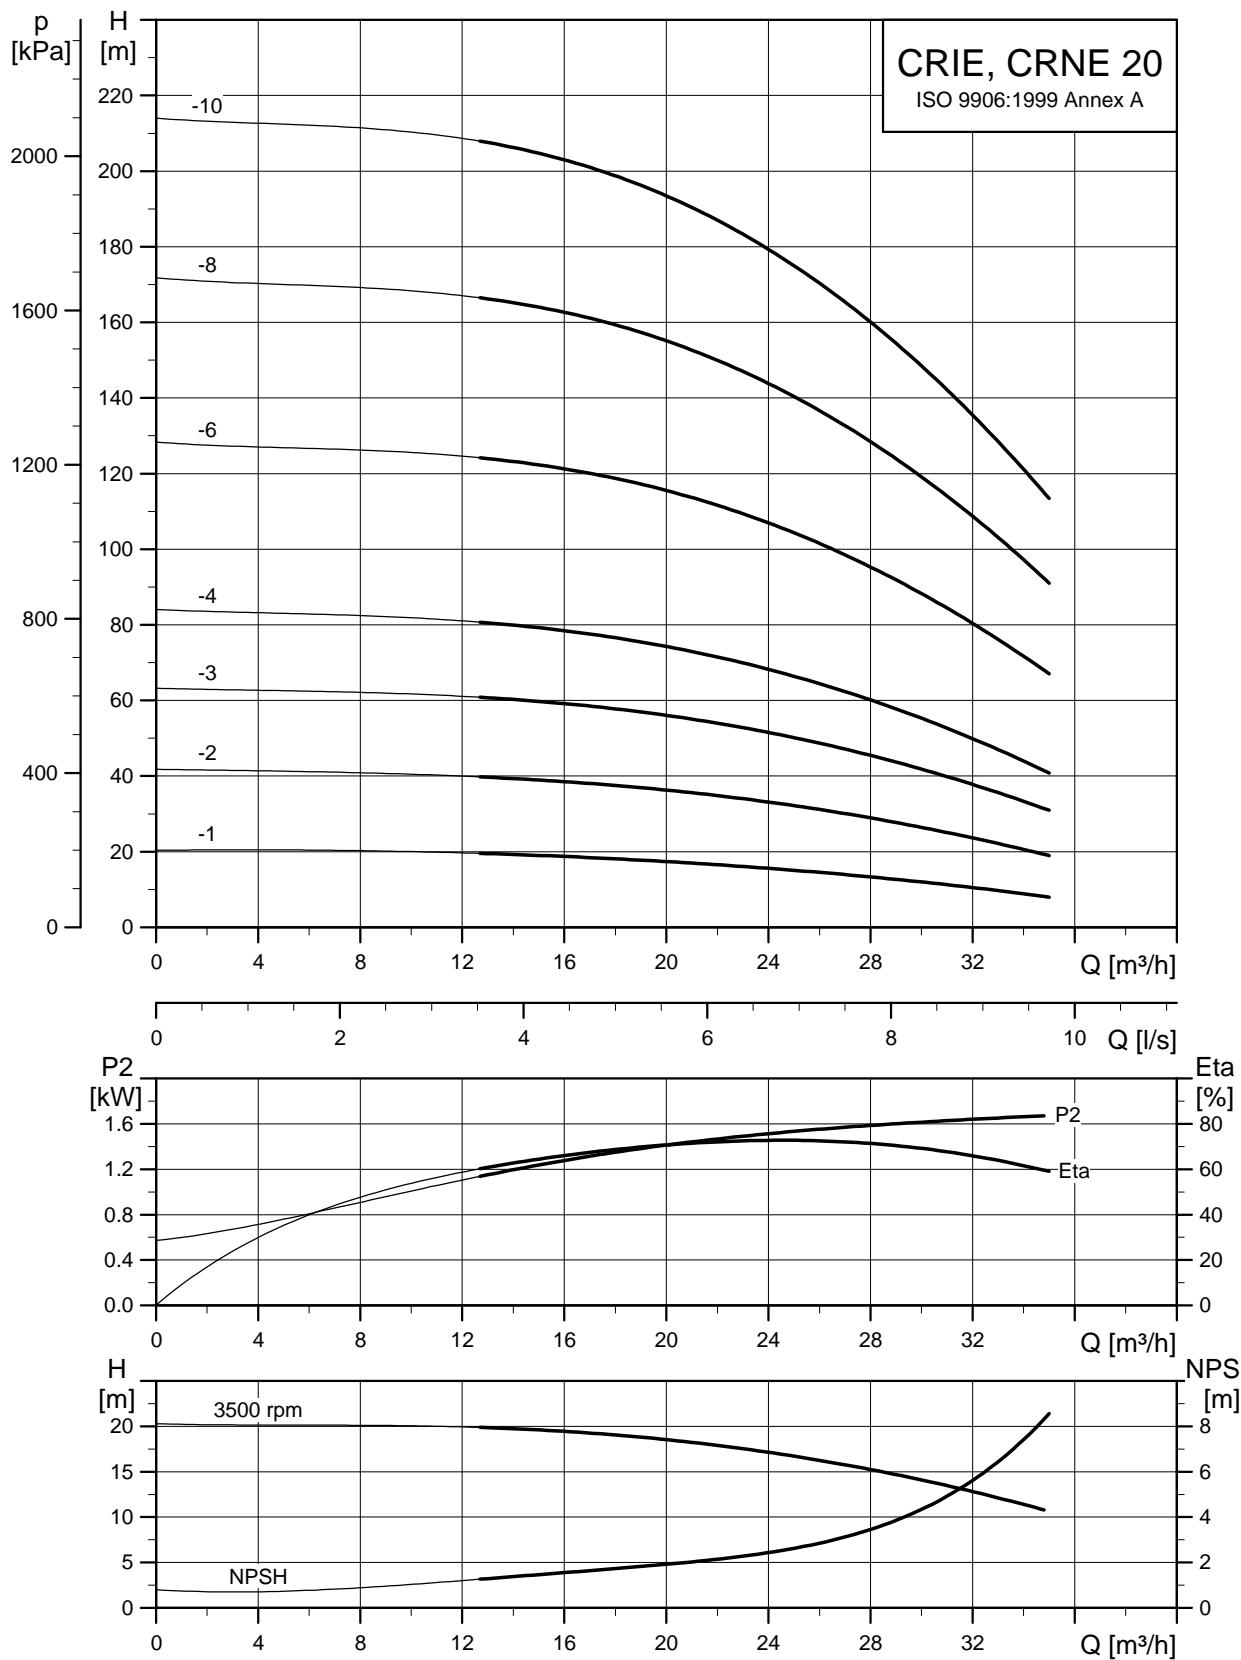
TM50 6843 0313

Dimensional sketches

TM05 9399 3713

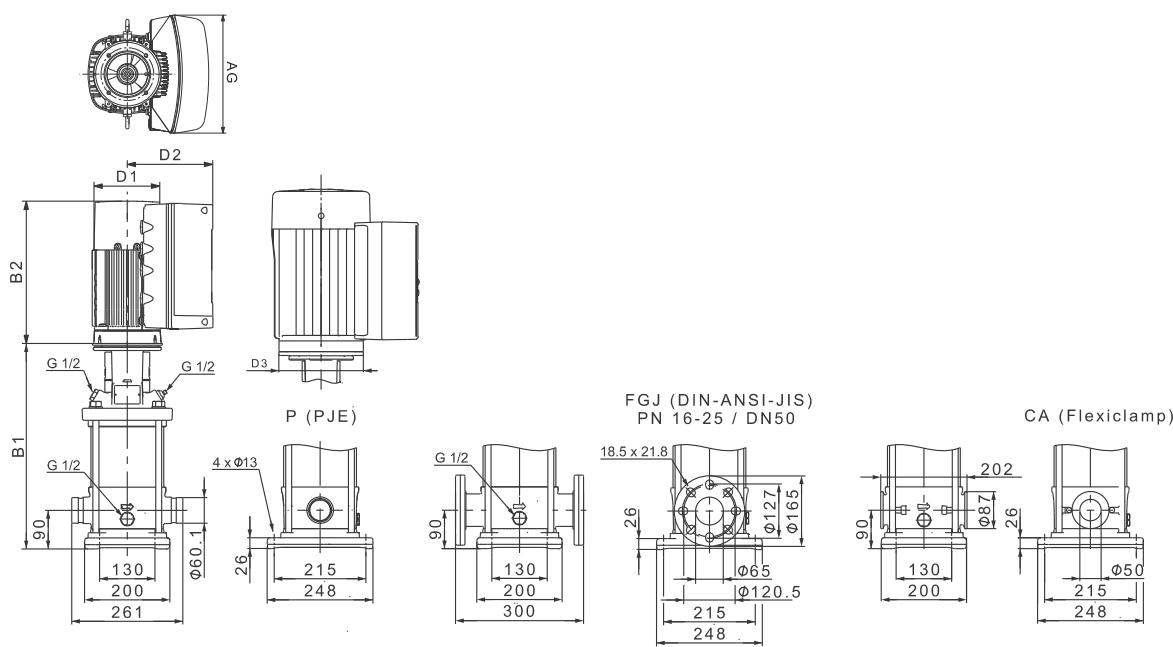
Dimensions and weights

Pump type	P ₂ [kW]	CRE								Net weight [kg]	
		Dimension [mm]									
		Oval flange		DIN flange		D1	D2	D3	AG	Oval flange	DIN flange
B1	B1+B2	B1	B1+B2								
CRE 20-1	2,2	415	689	415	689	122	158	135	268	47	48
CRE 20-2	4	420	754	420	754	191	201	160	291	62	63
CRE 20-3	5,5	497	862	497	862	191	201	300	291	84	84
CRE 20-4	7,5	542	931	542	931	255	237	300	346	91	92
CRE 20-6	11	-	-	724	1130	255	237	350	346	-	132
CRE 20-8	15	-	-	814	1285	314	308	350	420	-	207
CRE 20-10	18,5	-	-	904	1419	314	308	350	420	-	223

CRIE, CRNE 20

TM05 6844 0313

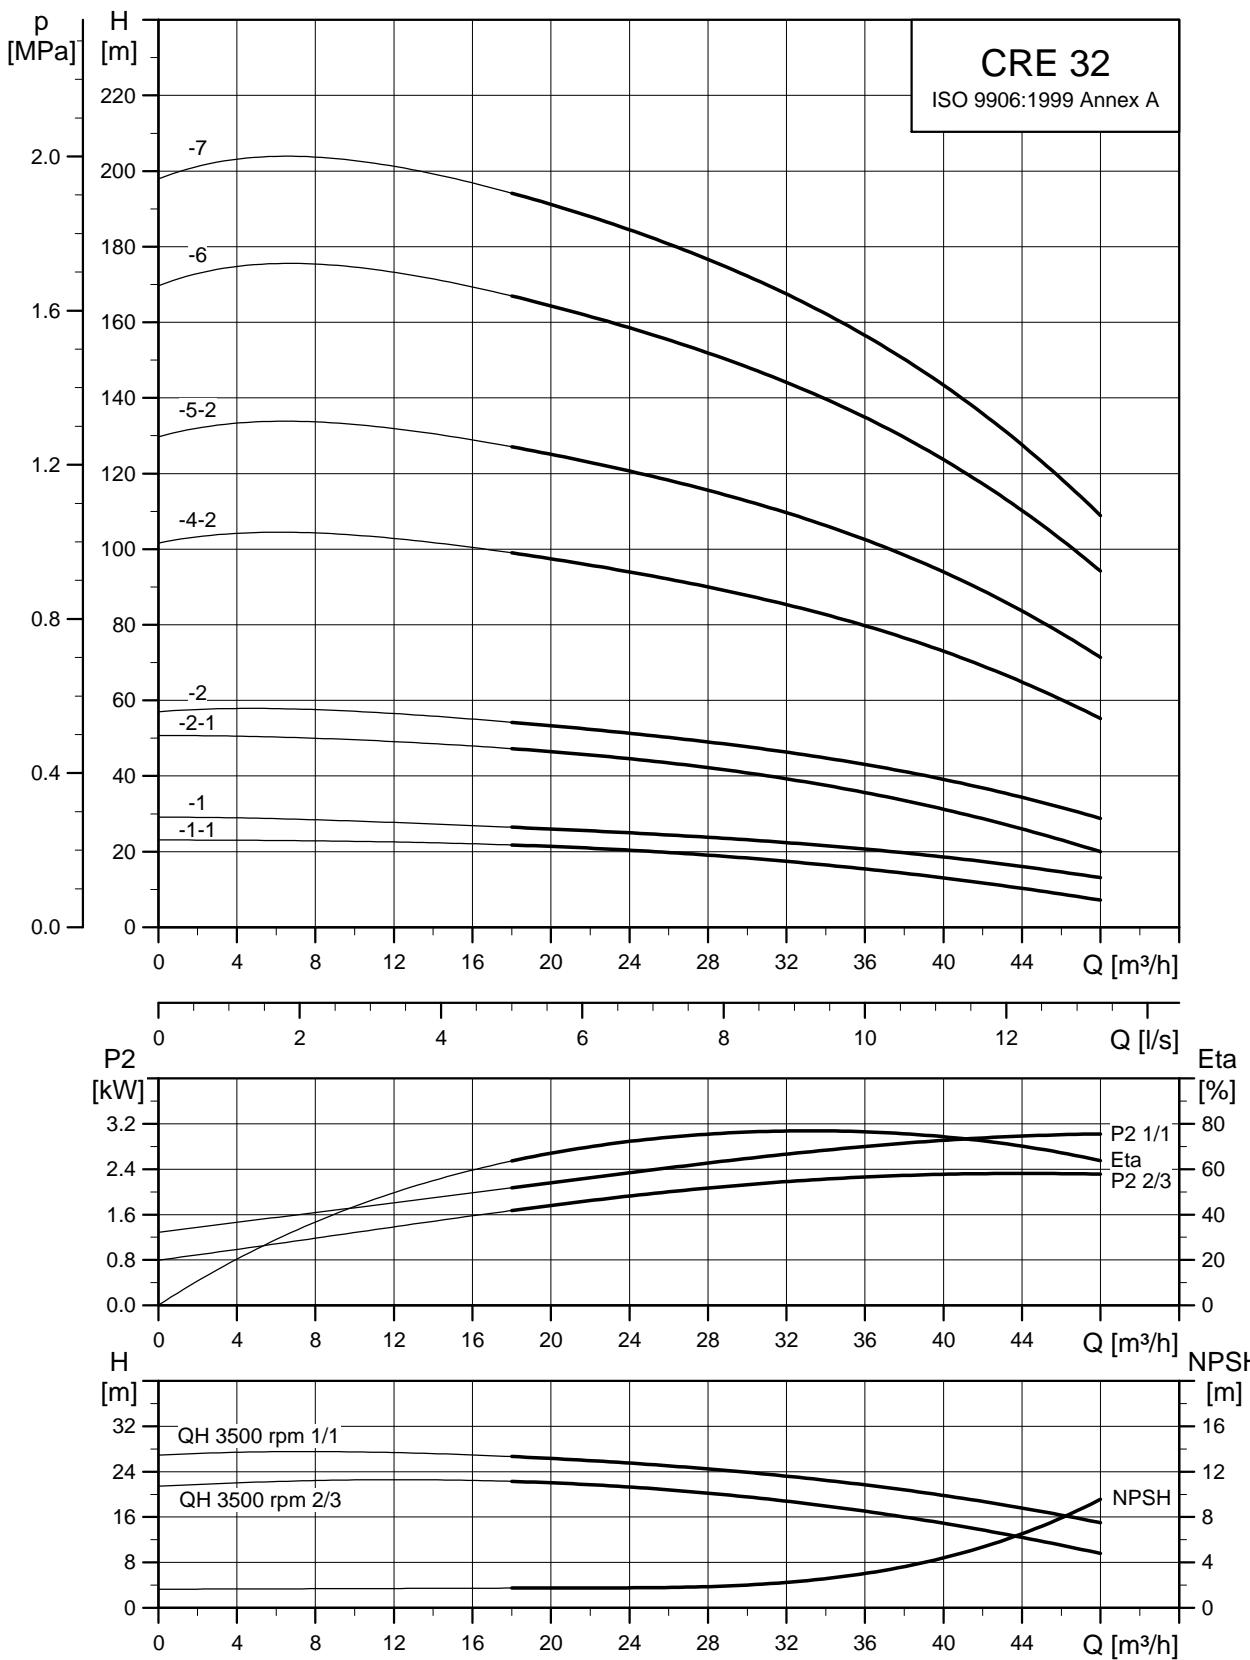
Dimensional sketches



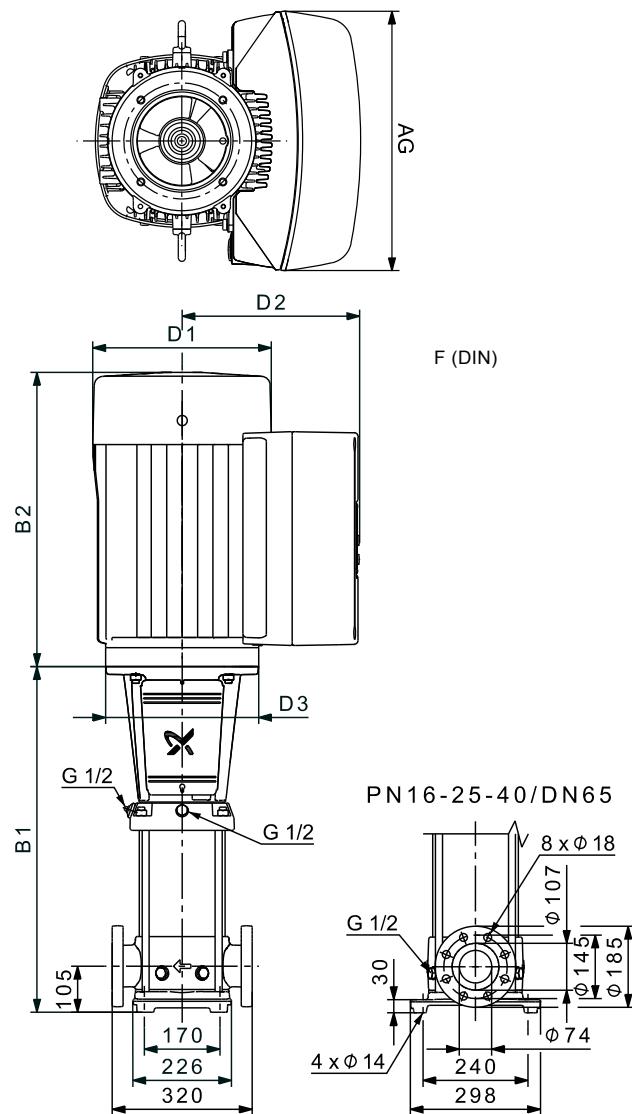
TM05 9400 3713

Dimensions and weights

Pump type	P_2 [kW]	CRIE/CRNE								Net weight [kg]	
		PJE/CA		Dimension [mm]		D1	D2	D3	AG	PJE/CA	DIN flange
		B1	B1+B2	B1	B1+B2						
CRIE/CRNE 20-1	2.2	413	687	413	687	122	158	135	268	40	45
CRIE/CRNE 20-2	4	418	752	418	752	191	201	160	291	55	60
CRIE/CRNE 20-3	5.5	495	860	495	860	191	201	300	291	77	82
CRIE/CRNE 20-4	7.5	540	929	540	929	255	237	300	346	85	89
CRIE/CRNE 20-6	11	722	1128	722	1128	255	237	350	346	125	130
CRIE/CRNE 20-8	15	812	1283	812	1283	314	308	350	420	199	204
CRIE/CRNE 20-10	18.5	902	1417	902	1417	314	308	350	420	215	219

CRE 32

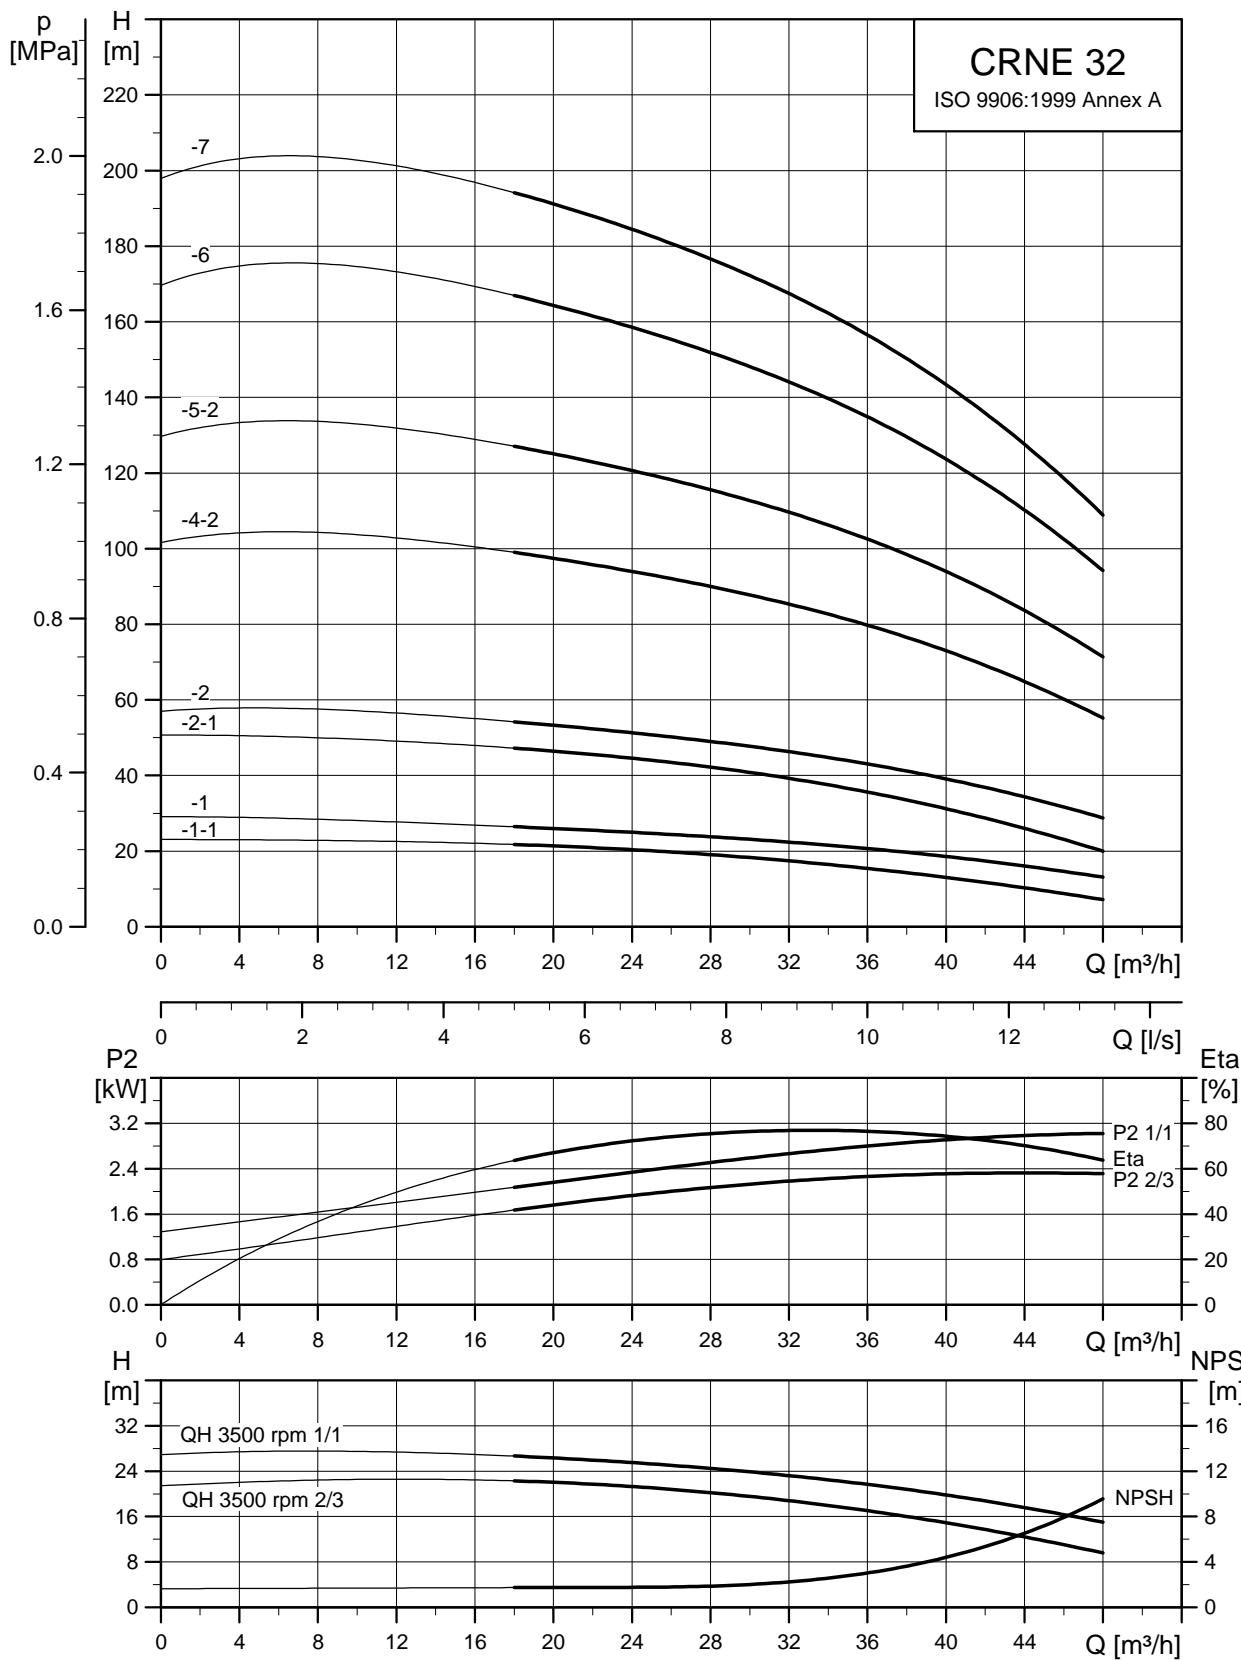
TM05 6845 0313

Dimensional sketches

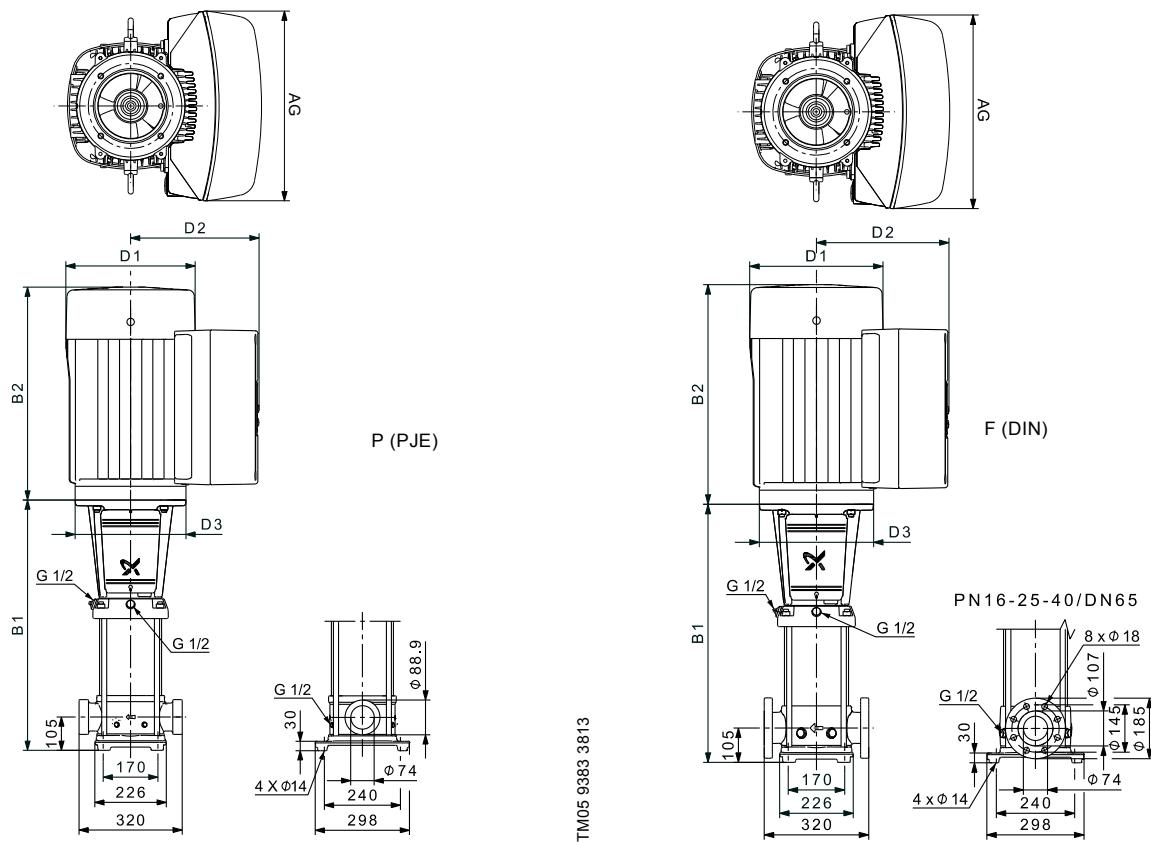
TM05 9384 3713

Dimensions and weights

Pump type	P ₂ [kW]	CRE						Net weight [kg]
		B1	B1+B2	D1	D2	D3	AG	
CRE 32-1-1	2.2	505	779	122	158	135	268	63
CRE 32-1	3	505	839	191	201	160	291	69
CRE 32-2-1	5.5	575	940	191	201	300	291	91
CRE 32-2	7.5	575	964	255	237	300	346	97
CRE 32-4-2	11	825	1231	255	237	350	346	129
CRE 32-5-2	15	895	1366	314	308	350	420	203
CRE 32-6	18.5	965	1480	314	308	350	420	218
CRE 32-7	22	1035	1576	314	308	350	420	234

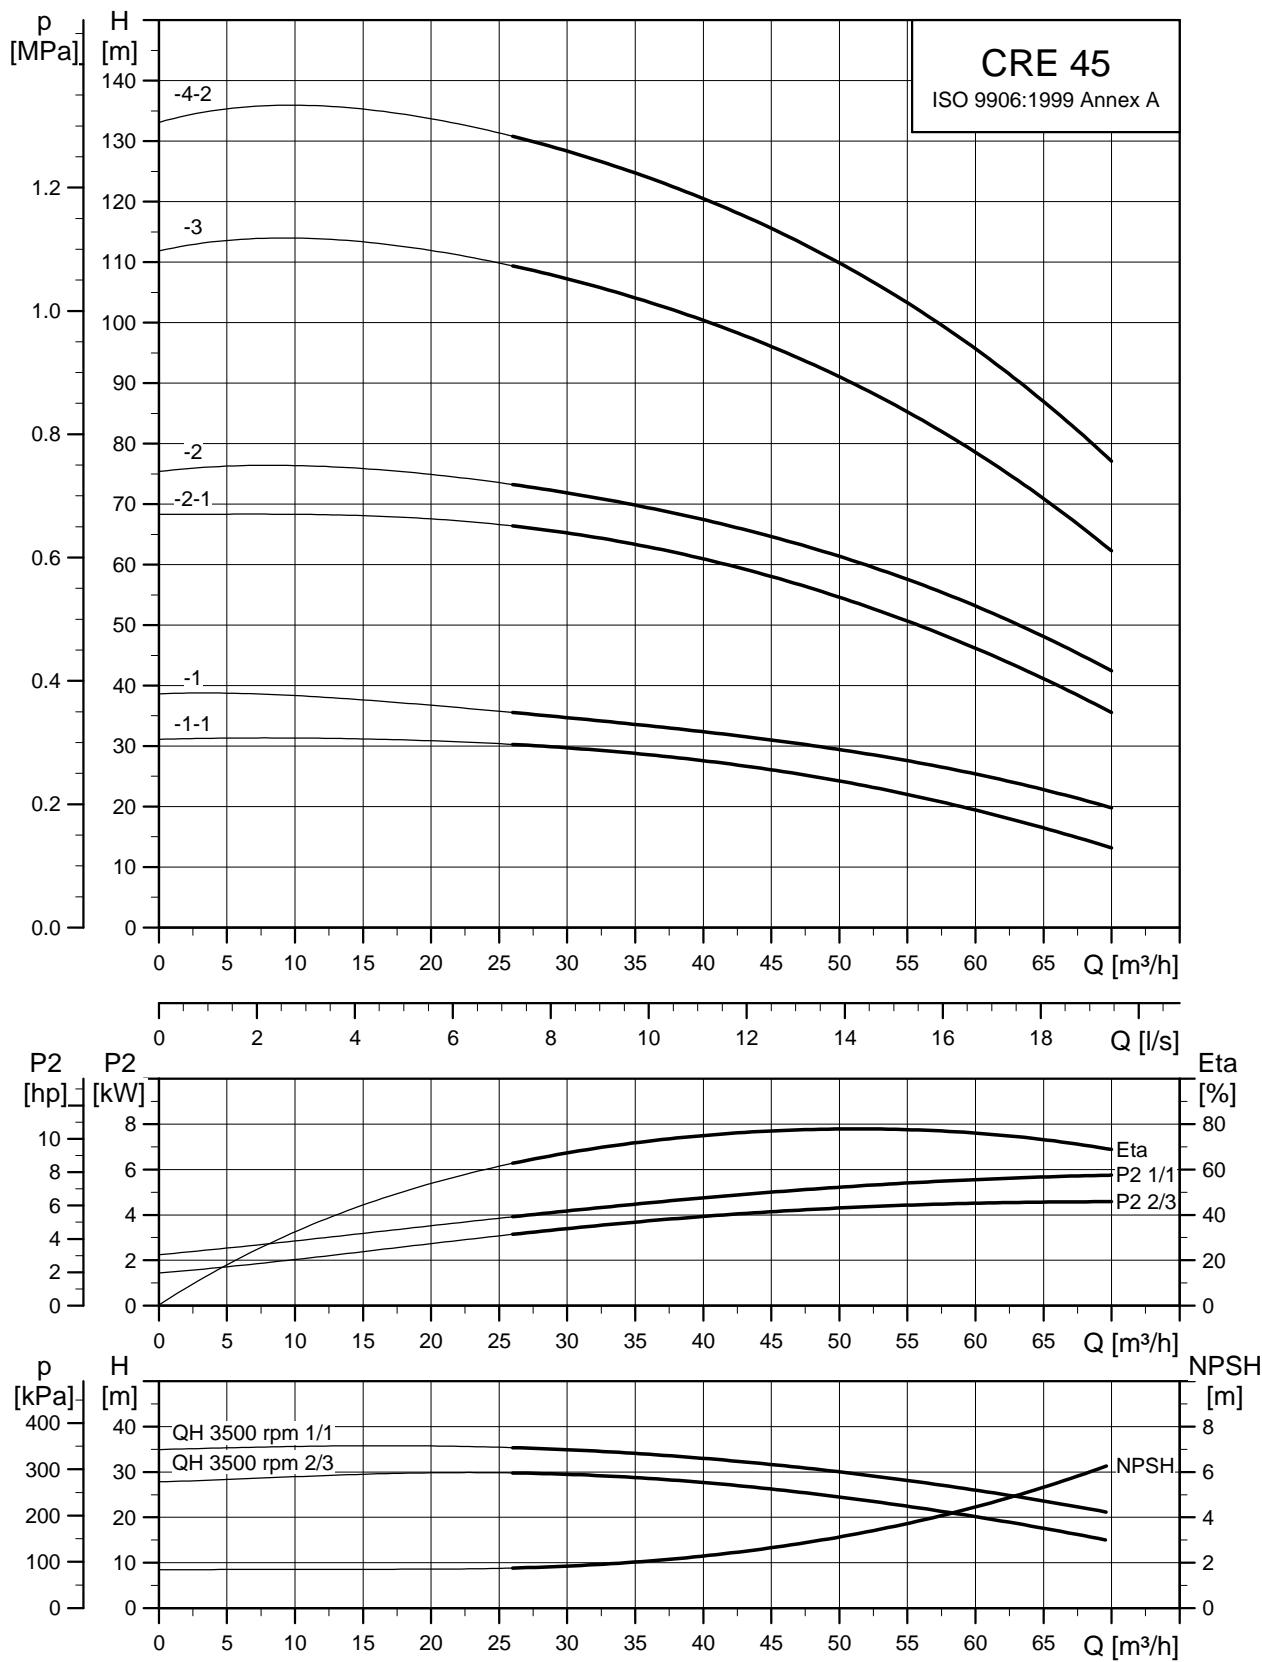
CRNE 32

Dimensional sketches



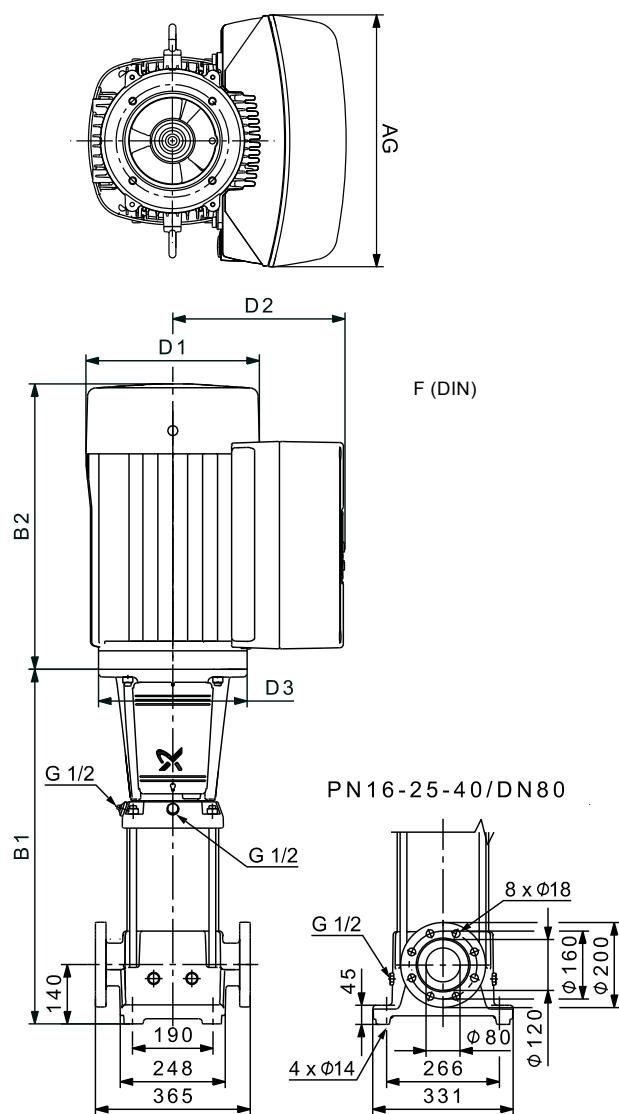
Dimensions and weights

Pump type	P_2 [kW]	CRNE								Net weight [kg]	
		Dimension [mm]				D1	D2	D3	AG		
		PJE		DIN flange							
B1	B1+B2	B1	B1+B2	D1	D2	D3	AG	PJE/CA	DIN flange		
CRNE 32-1-1	2,2	505	779	505	779	122	158	135	268	65	65
CRNE 32-1	3	505	839	505	839	191	201	160	291	71	71
CRNE 32-2-1	5,5	575	940	575	940	191	201	300	291	93	93
CRNE 32-2	7,5	575	964	575	964	255	237	300	346	99	99
CRNE 32-4-2	11	825	1231	825	1231	255	237	350	346	132	132
CRNE 32-5-2	15	895	1366	895	1366	314	308	350	420	205	205
CRNE 32-6	18,5	965	1480	965	1480	314	308	350	420	220	220
CRNE 32-7	22	1035	1576	1035	1576	314	308	350	420	236	236

CRE 45

TM05 6847 0313

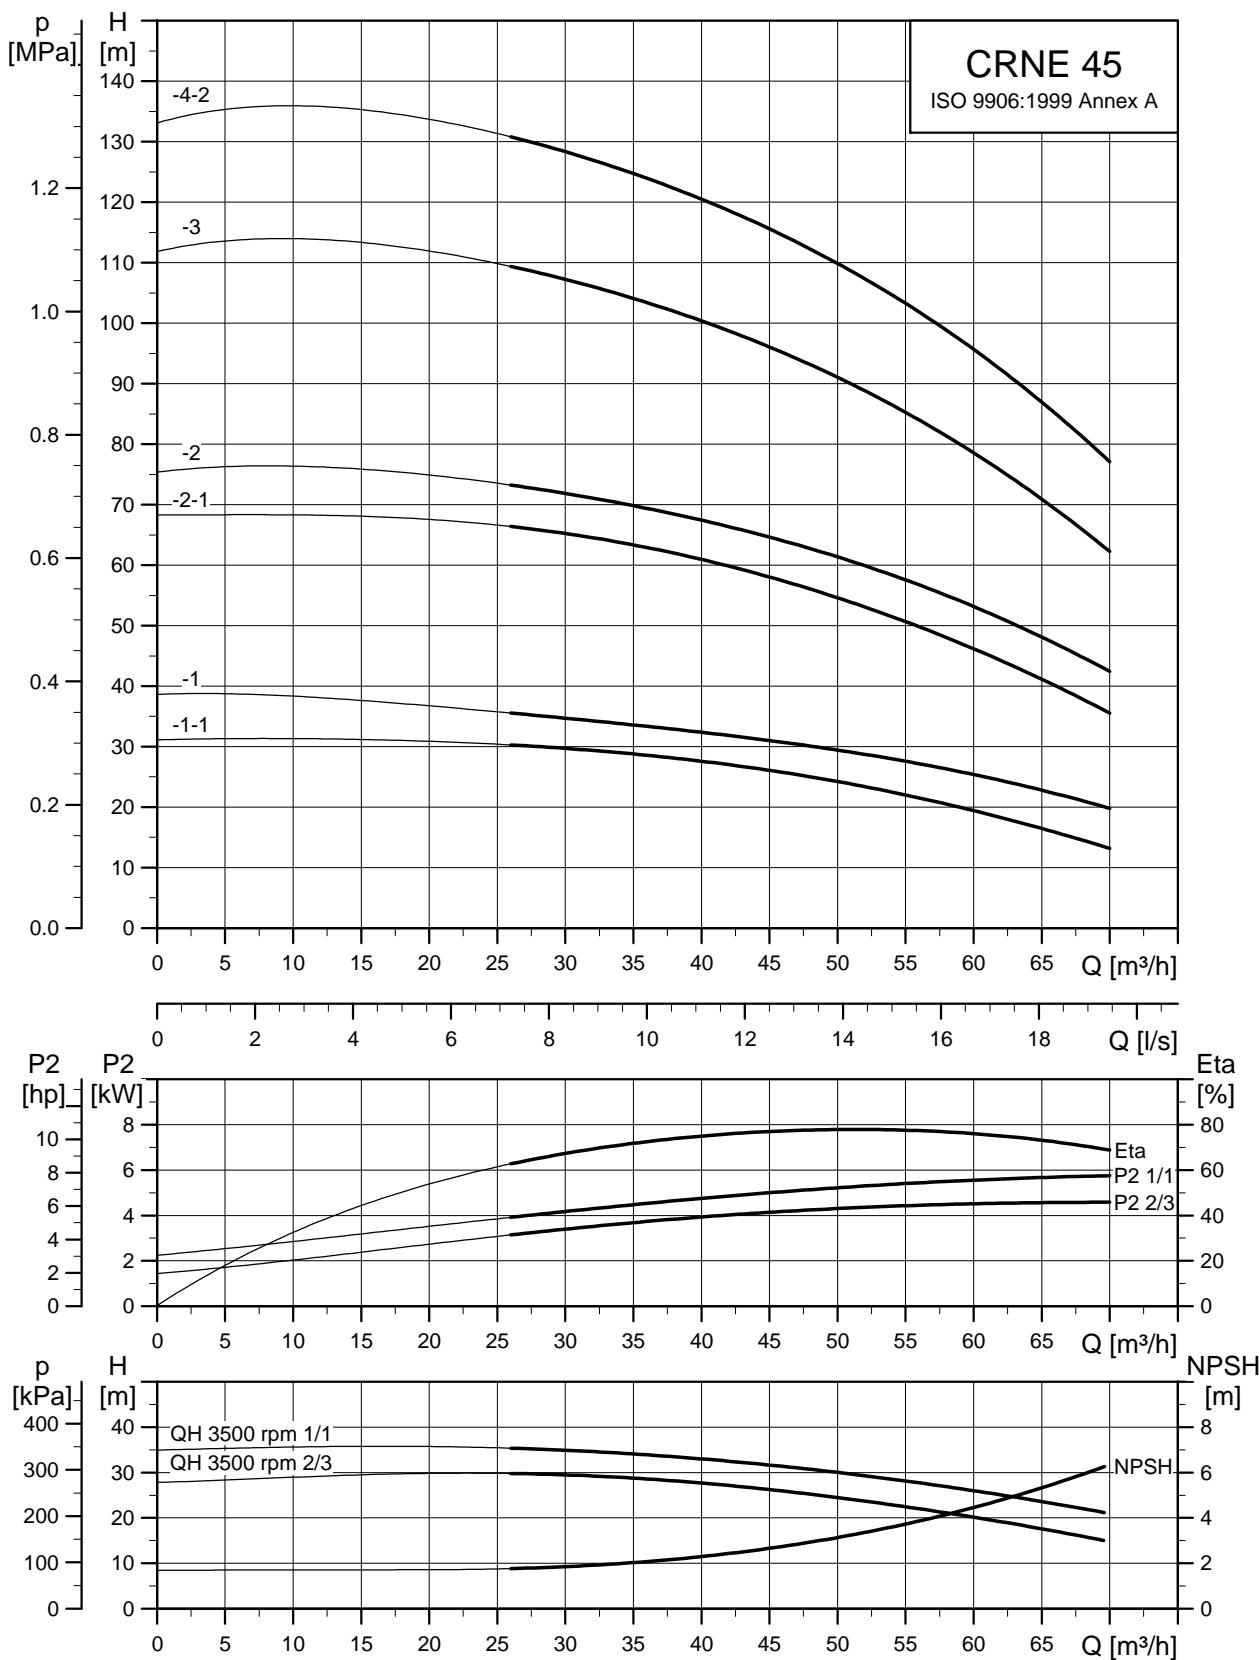
Dimensional sketches



TM05 9385 3713

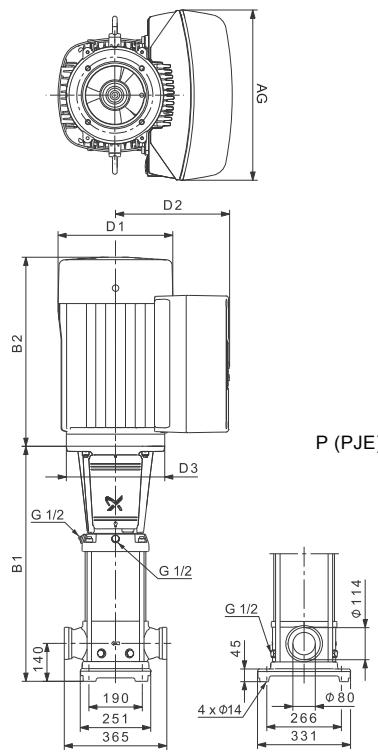
Dimensions and weights

Pump type	P_2 [kW]	CRE						Net weight [kg]
		B1	B1+B2	D1	D2	D3	AG	
CRE 45-1-1	5,5	559	924	191	201	300	291	98
CRE 45-1	7,5	559	948	255	237	300	346	104
CRE 45-2-2	11	749	1155	255	237	350	346	134
CRE 45-2-1	11	749	1155	255	237	350	346	134
CRE 45-2	15	749	1220	314	308	350	420	204
CRE 45-3	18,5	829	1344	314	308	350	420	220
CRE 45-4-2	22	909	1450	314	308	350	420	237

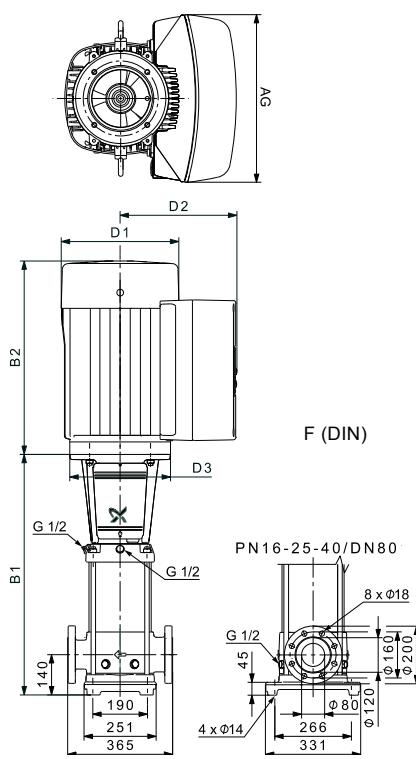
CRNE 45

TM05 6848 0313

Dimensional sketches



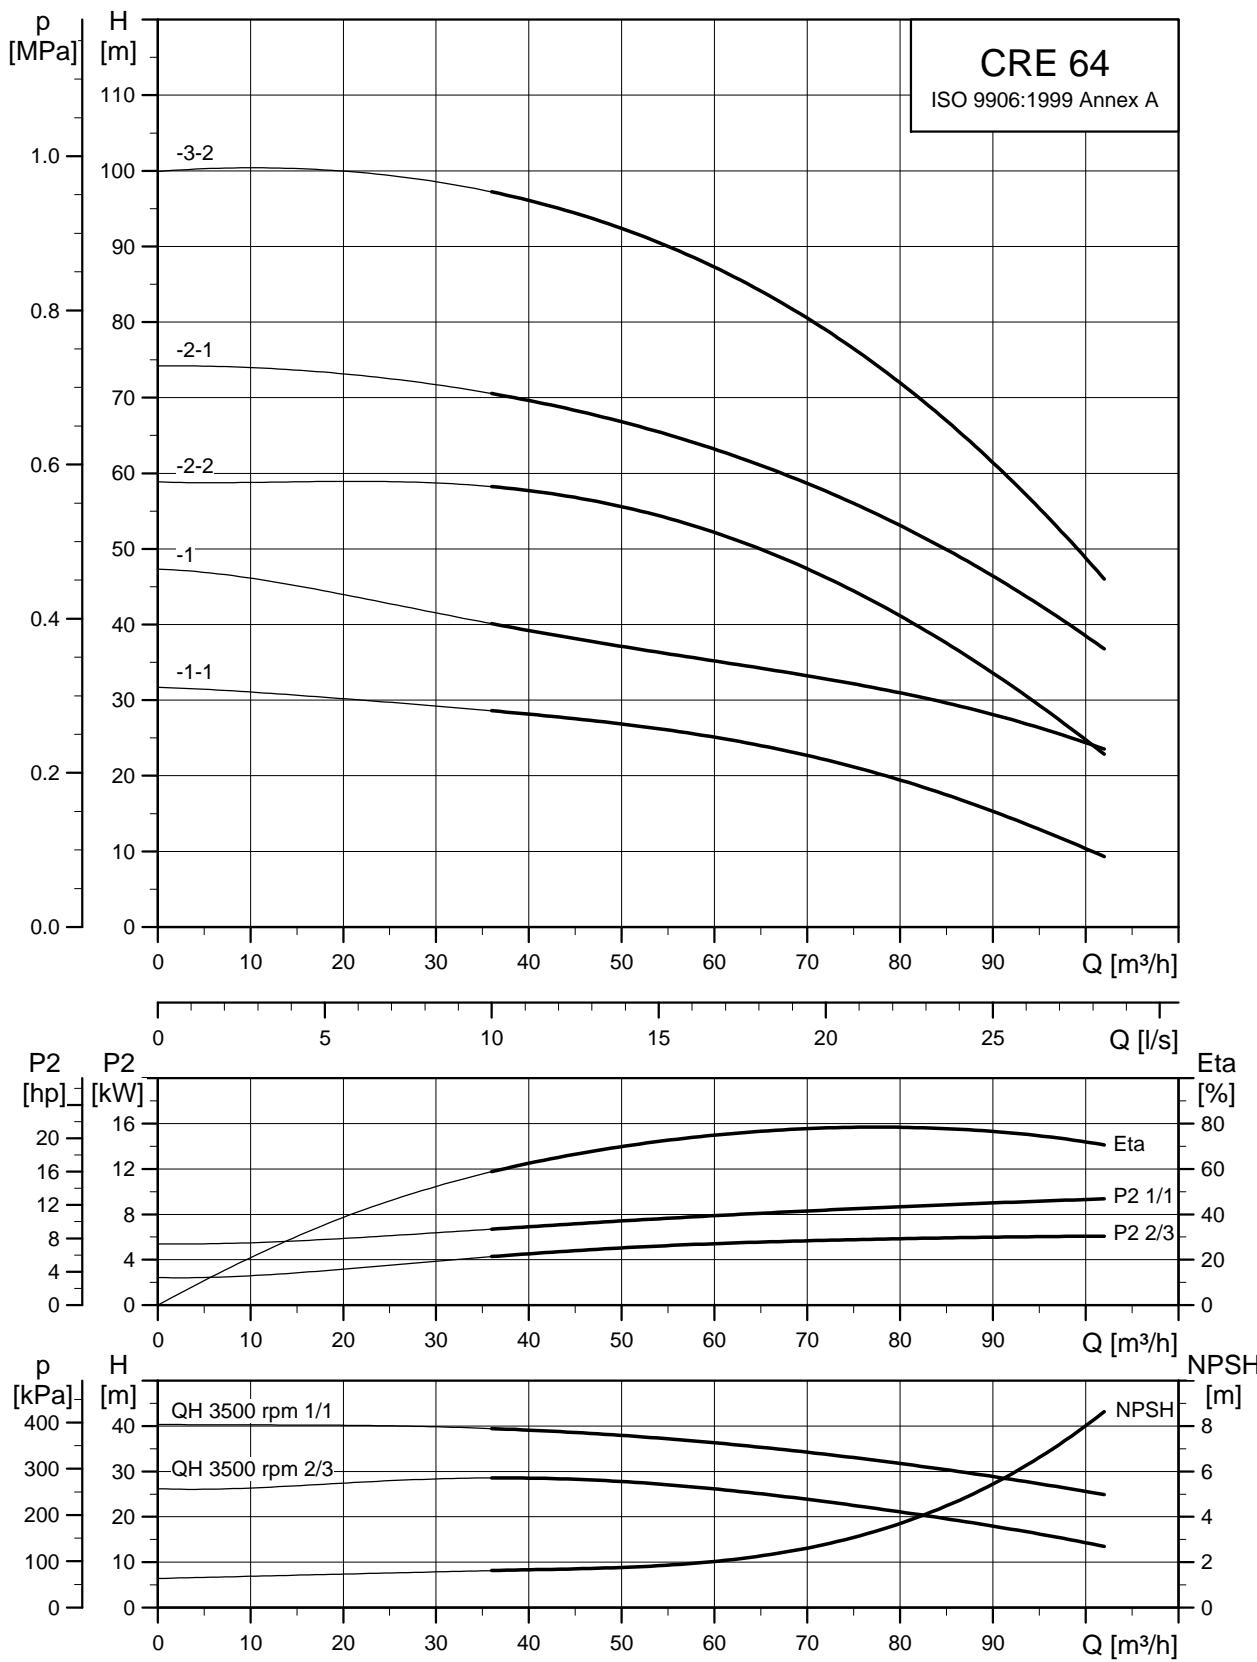
TM05 9387 3713



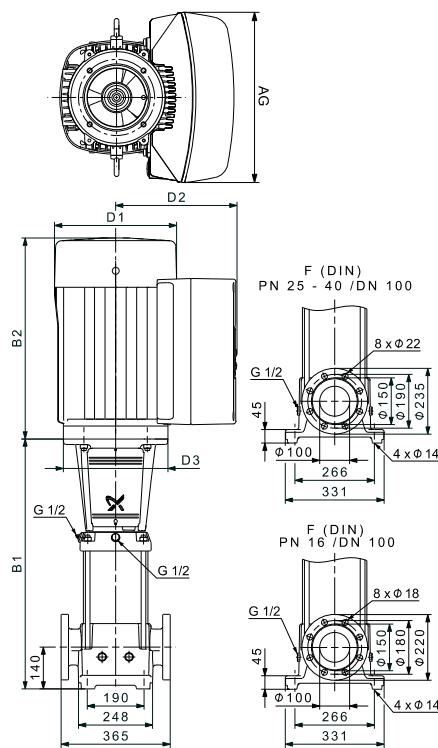
TM05 9386 3713

Dimensions and weights

Pump type	P_2 [kW]	CRNE									
		Dimension [mm]								Net weight [kg]	
		PJE				DIN flange				D1	D2
B1	B1+B2	B1	B1+B2								
CRNE 45-1-1	5,5	559	924	559	924	191	201	300	291	98	98
CRNE 45-1	7,5	559	948	559	948	255	237	300	346	104	104
CRNE 45-2-2	11	749	1155	749	1155	255	237	350	346	134	134
CRNE 45-2-1	11	749	1155	749	1155	255	237	350	346	134	134
CRNE 45-2	15	749	1220	749	1220	314	308	350	420	205	205
CRNE 45-3	18,5	829	1344	829	1344	314	308	350	420	221	221
CRNE 45-4-2	22	909	1450	909	1450	314	308	350	420	237	237

CRE 64

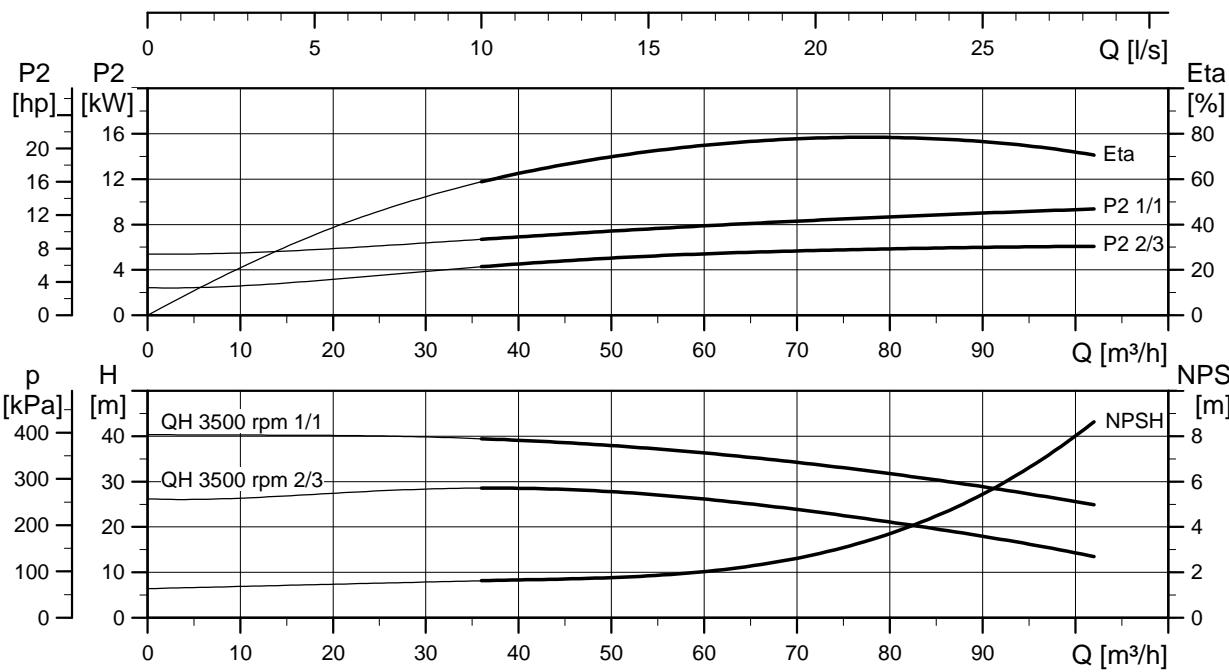
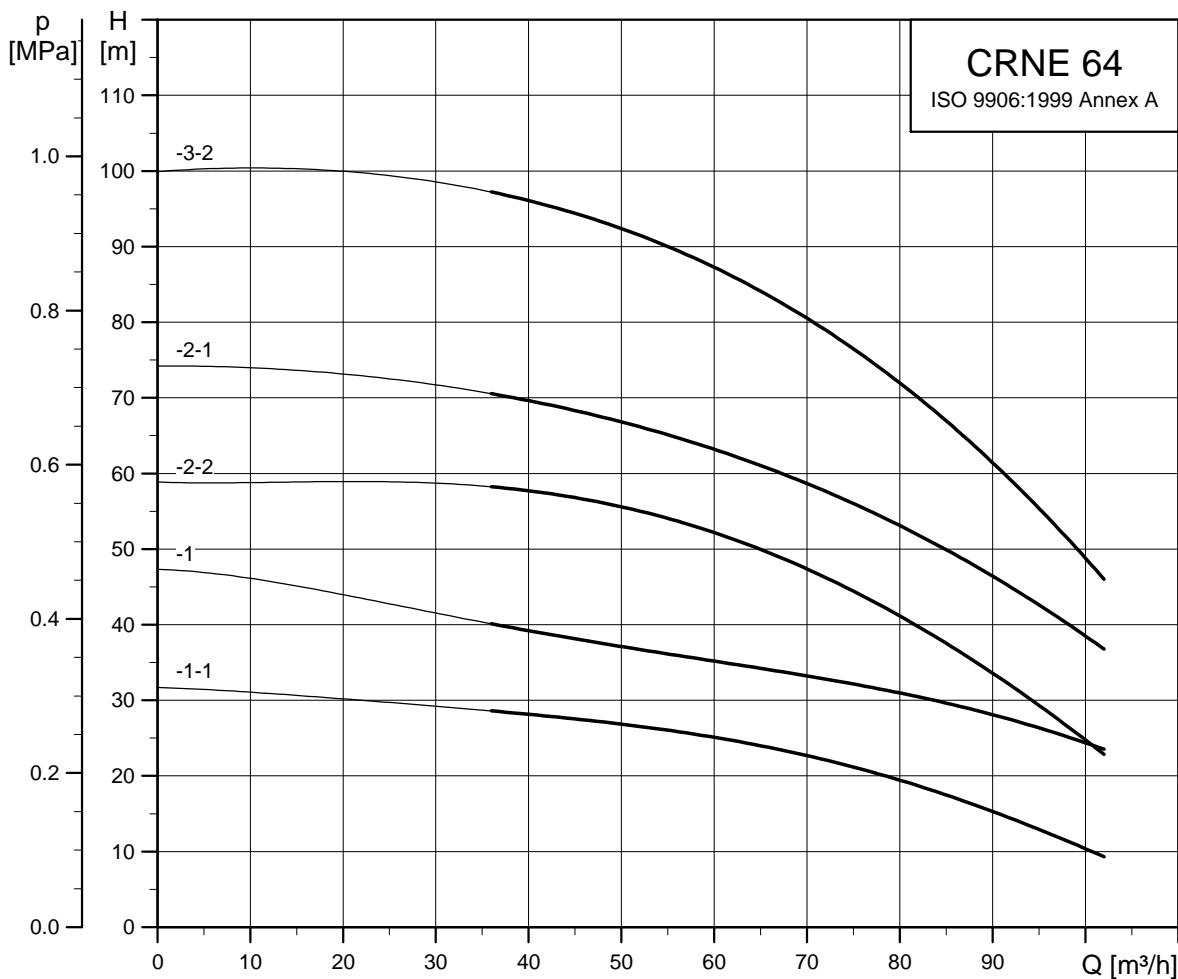
TM05 6849 0313

Dimensional sketches

TM05 9388 3713

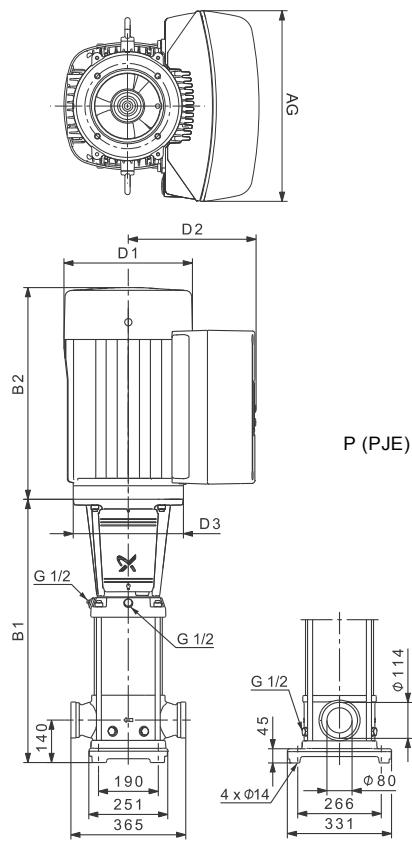
Dimensions and weights

Pump type	P_2 [kW]	CRE						Net weight [kg]
		B1	B1+B2	D1	D2	D3	AG	
CRE 64-1-1	7,5	561	950	255	237	300	346	106
CRE 64-1	11	671	1077	255	237	350	346	132
CRE 64-2-2	15	754	1225	314	308	350	420	207
CRE 64-2-1	18,5	754	1269	314	308	350	420	219
CRE 64-3-2	22	836	1377	314	308	350	420	237

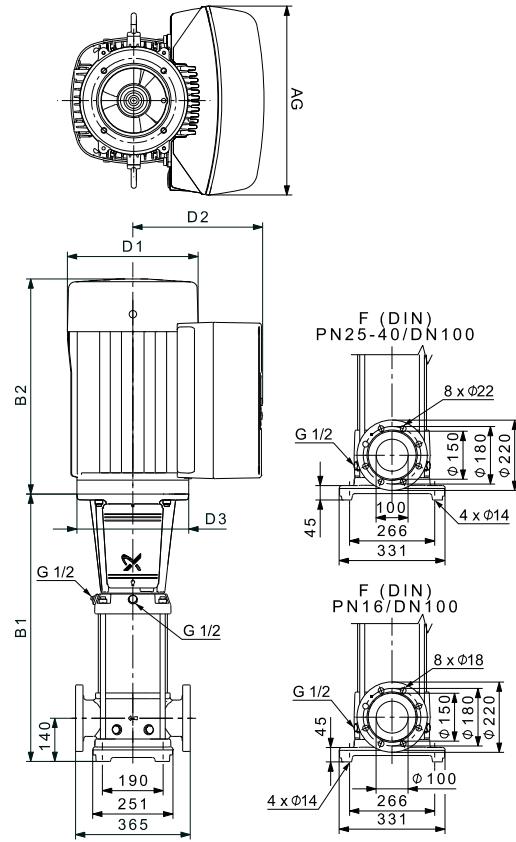
CRNE 64

TM05 6850 0313

Dimensional sketches



TM05 9387 3813

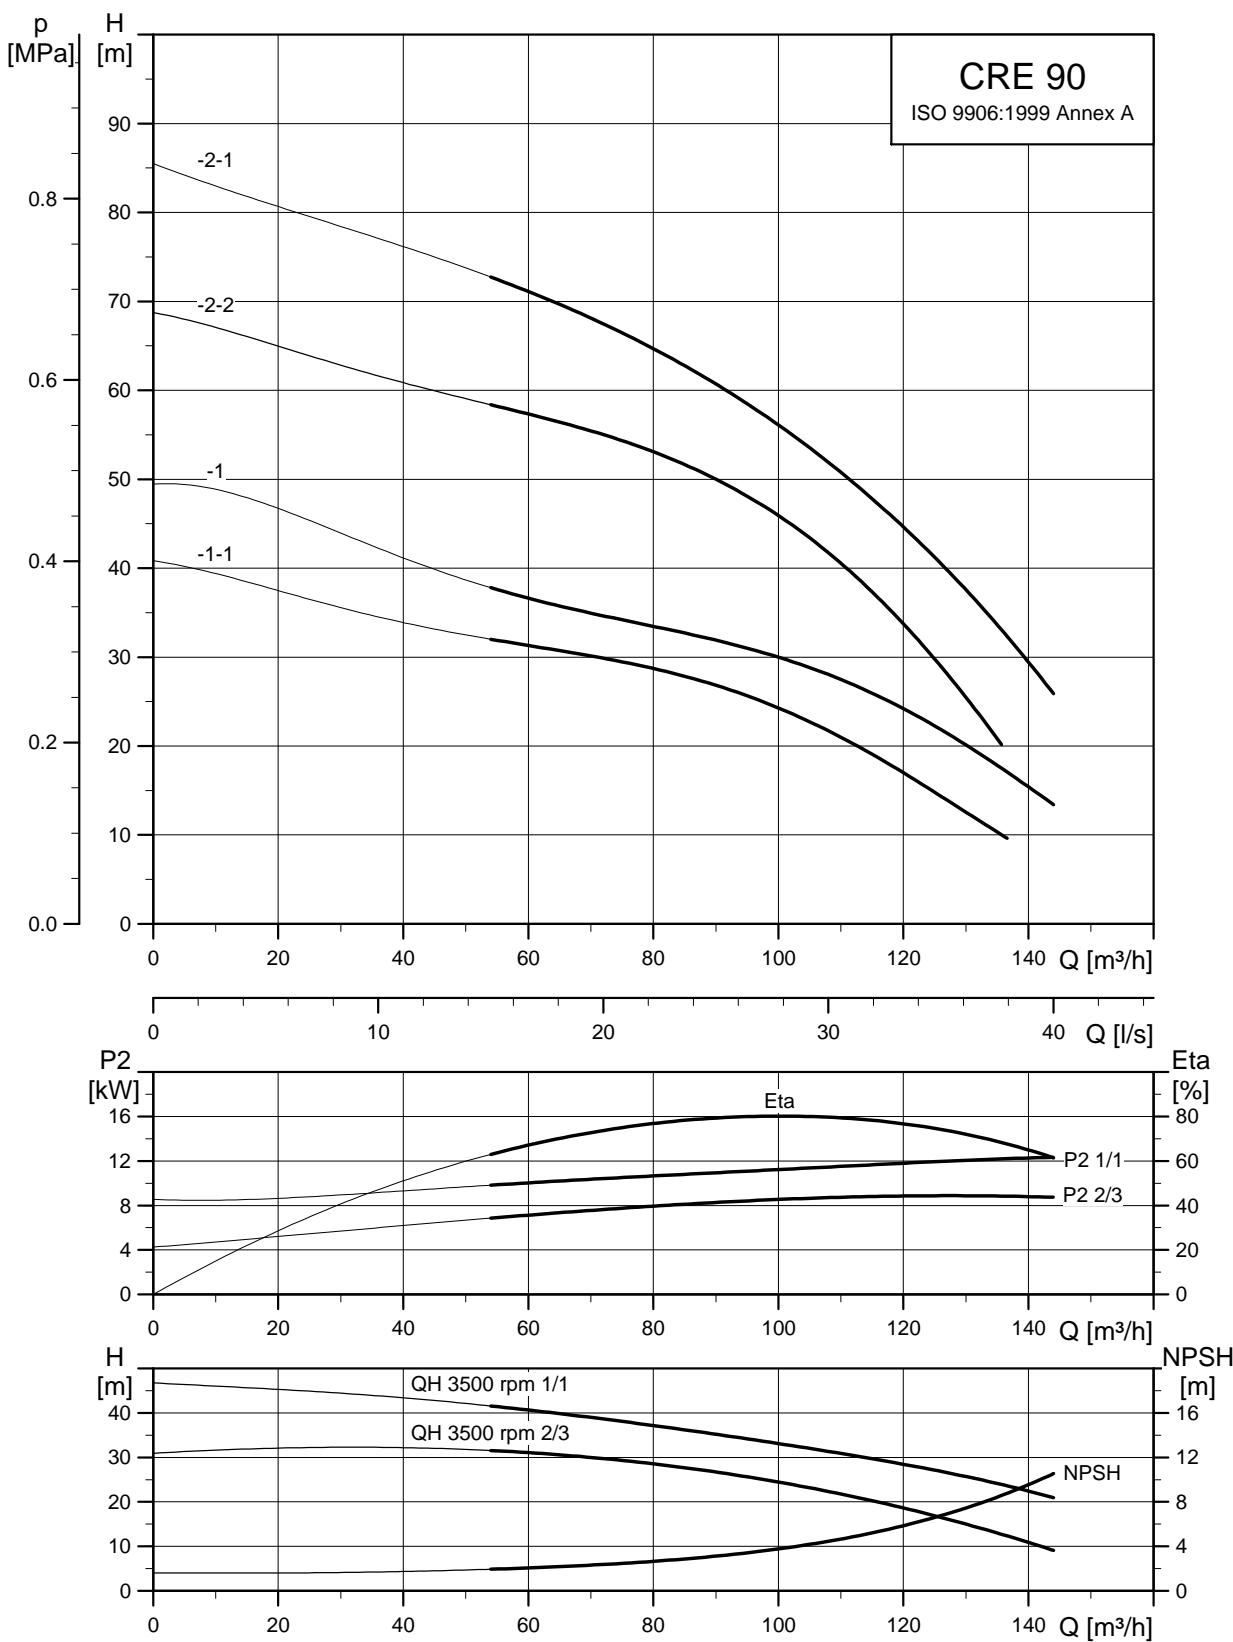


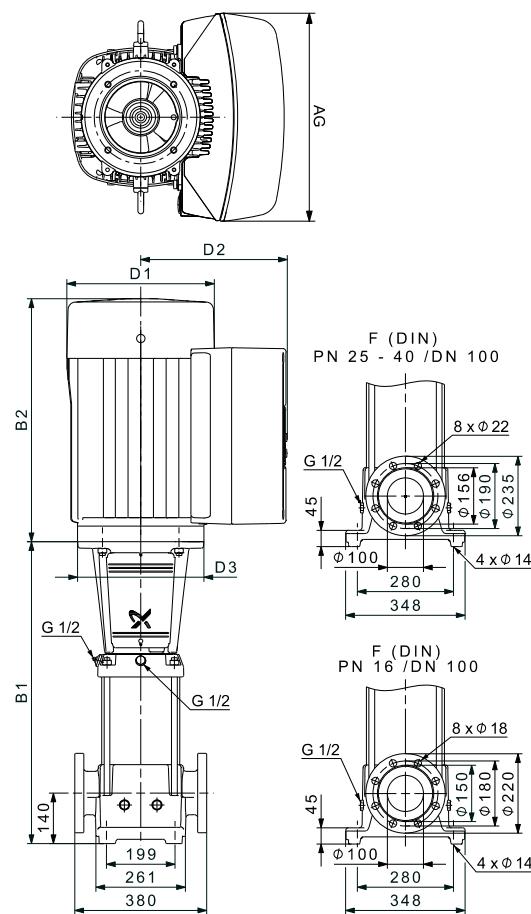
TM05 9390 3713

Dimensions and weights

Pump type	P_2 [kW]	CRNE									
		Dimension [mm]				Net weight [kg]					
		PJE		DIN flange		D1	D2	D3	AG	PJE/CA	DIN flange
B1	B1+B2	B1	B1+B2								
CRNE 64-1-1	7,5	561	950	561	950	255	237	300	346	106	106
CRNE 64-1	11	671	1077	671	1077	255	237	350	346	132	132
CRNE 64-2-2	15	754	1225	754	1225	314	308	350	420	207	207
CRNE 64-2-1	18,5	754	1269	754	1269	314	308	350	420	219	219
CRNE 64-3-2	22	836	1377	836	1377	314	308	350	420	236	236

CRE 90

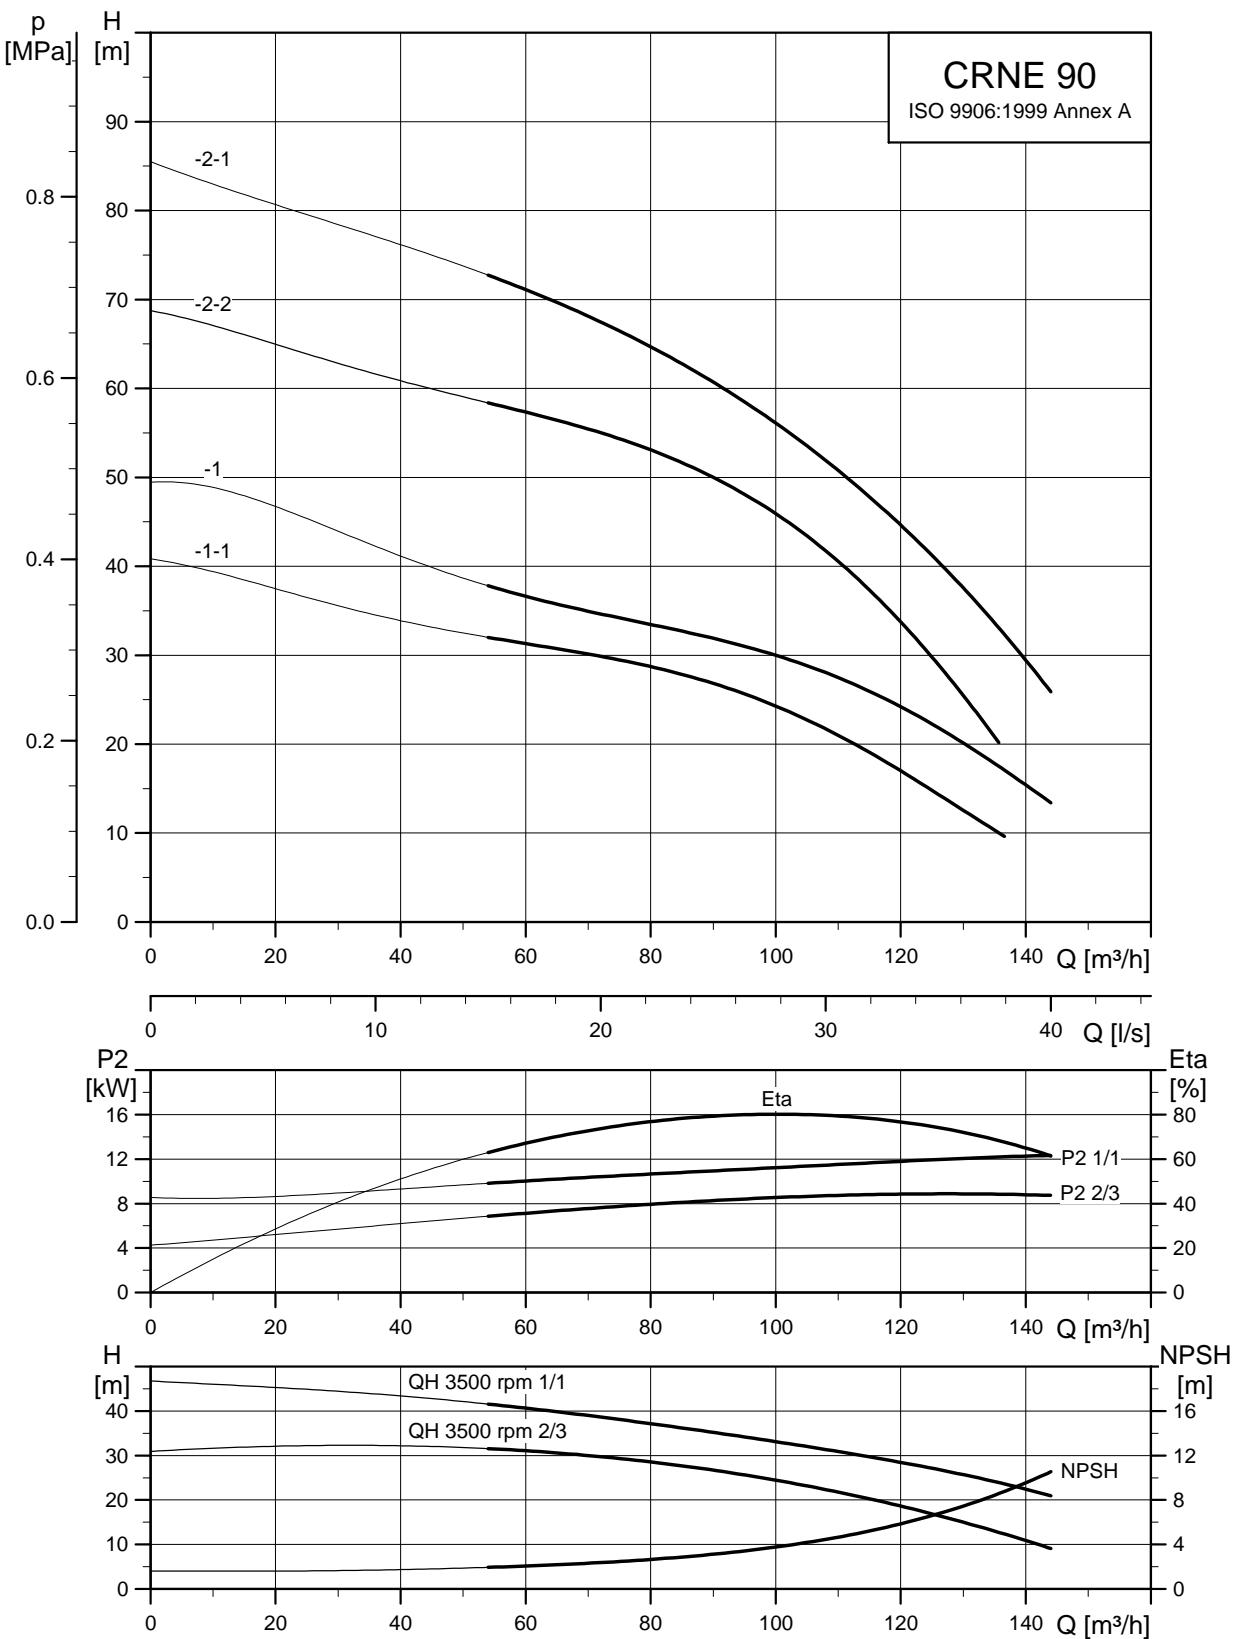


Dimensional sketches

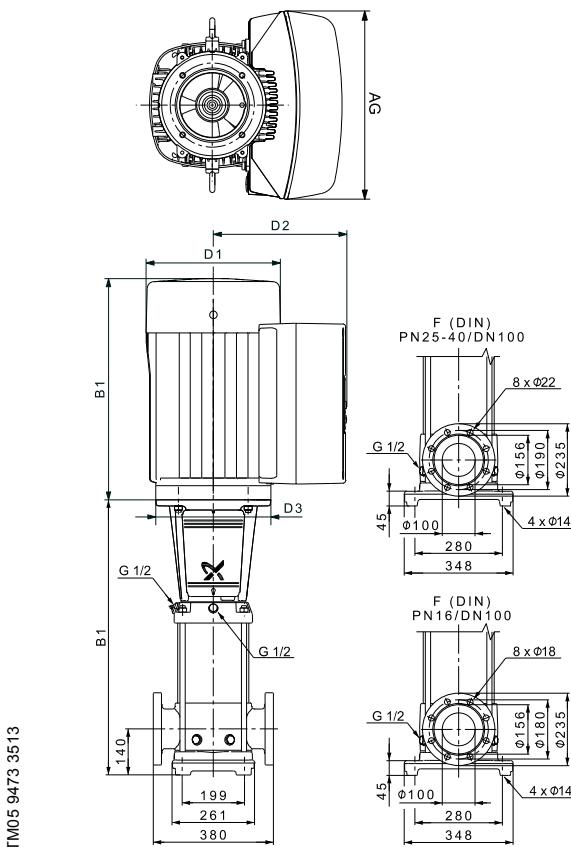
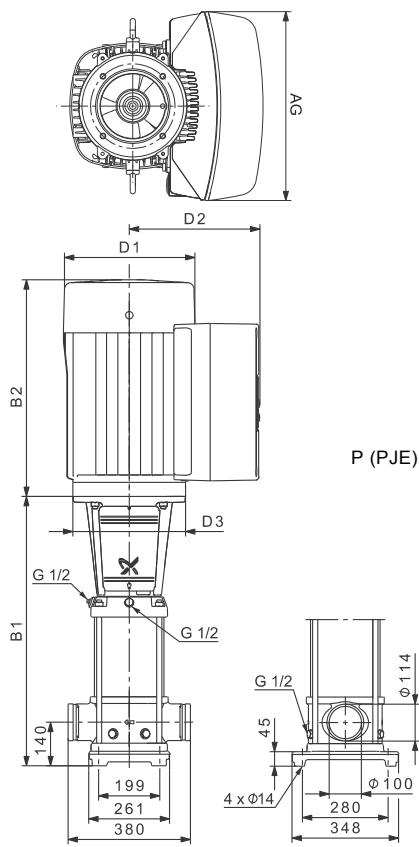
TM05 9391 3713

Dimensions and weights

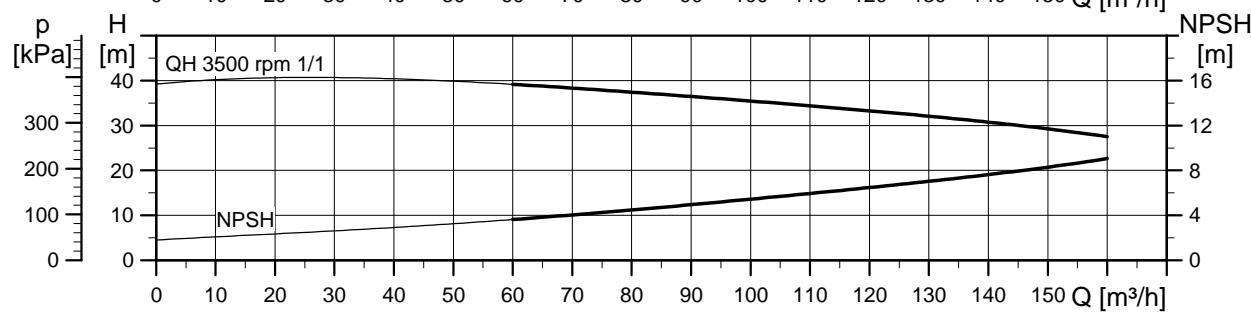
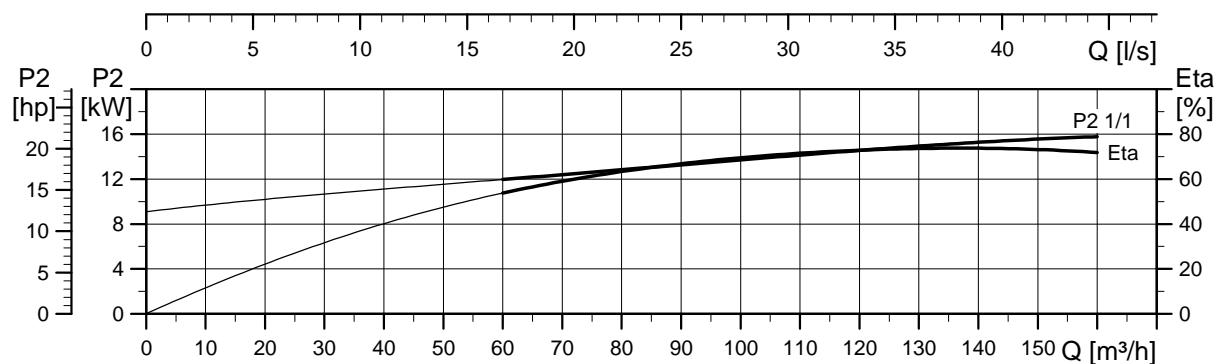
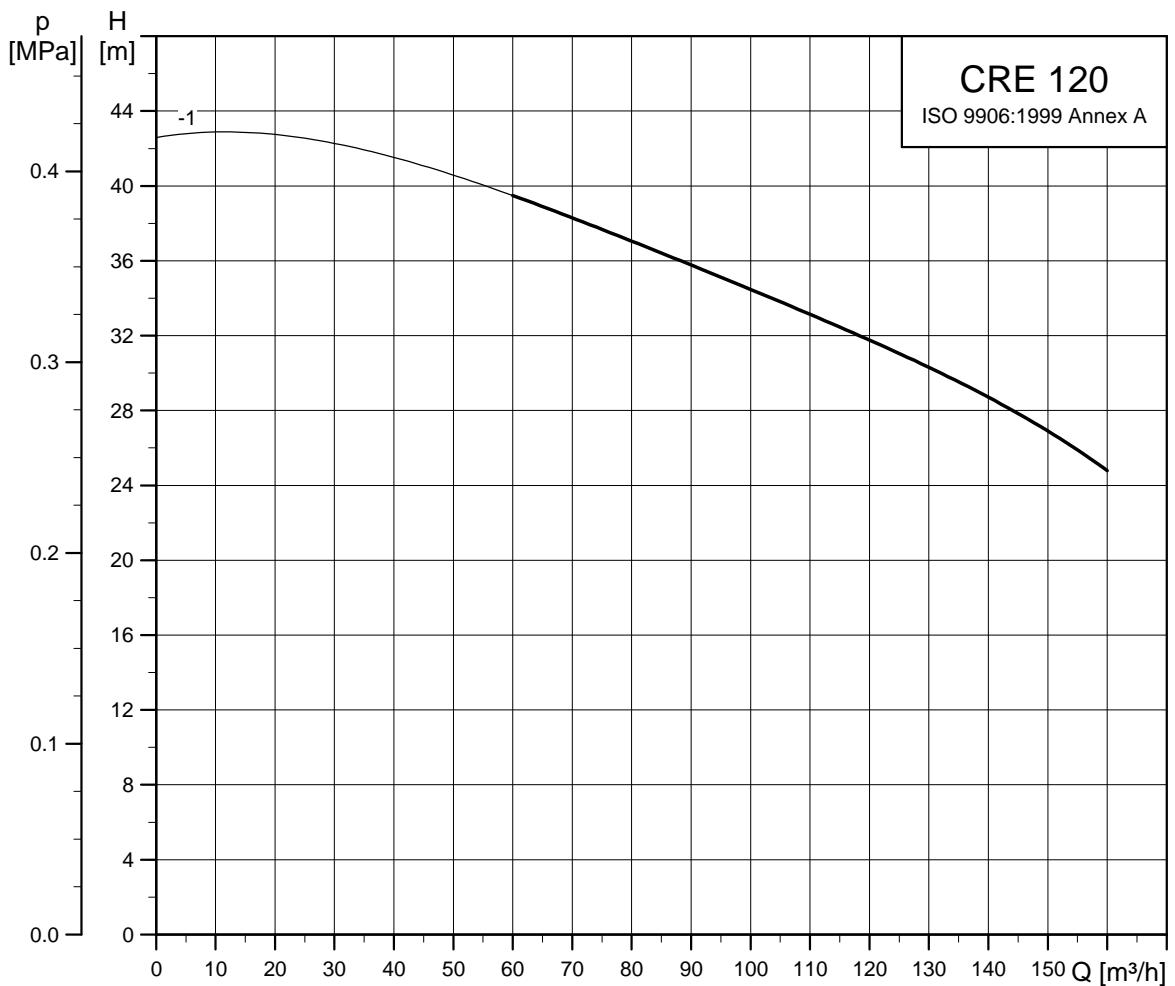
Pump type	P_2 [kW]	CRE						Net weight [kg]
		B1	B1+B2	D1	D2	D3	AG	
CRE 90-1-1	11	681	1087	255	237	350	346	137
CRE 90-1	15	681	1152	314	308	350	420	208
CRE 90-2-2	18,5	773	1288	314	308	350	420	225
CRE 90-2-1	22	773	1314	314	308	350	420	237

CRNE 90

TM05 6852 0313

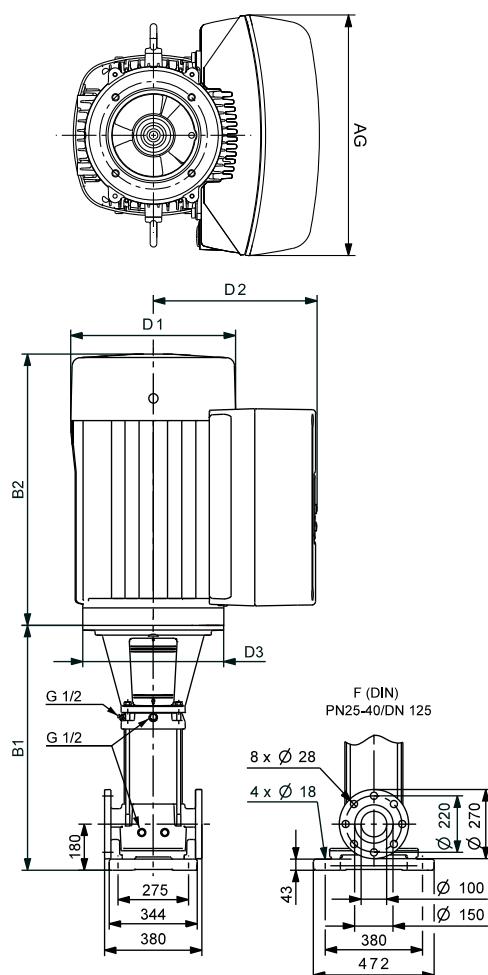
Dimensional sketches**Dimensions and weights**

Pump type	P ₂ [kW]	CRNE								Net weight [kg]	
		Dimension [mm]				D1	D2	D3	AG		
		PJE		DIN flange							
B1	B1+B2	B1	B1+B2	D1	D2	D3	AG	PJE/CA	DIN flange		
CRNE 90-1-1	11	681	1087	681	1087	255	237	350	346	139	139
CRNE 90-1	15	681	1152	681	1152	314	308	350	420	209	209
CRNE 90-2-2	18,5	773	1288	773	1288	314	308	350	420	226	226
CRNE 90-2-1	22	773	1314	773	1314	314	308	350	420	239	239

CRE 120

TM05 6853 0313

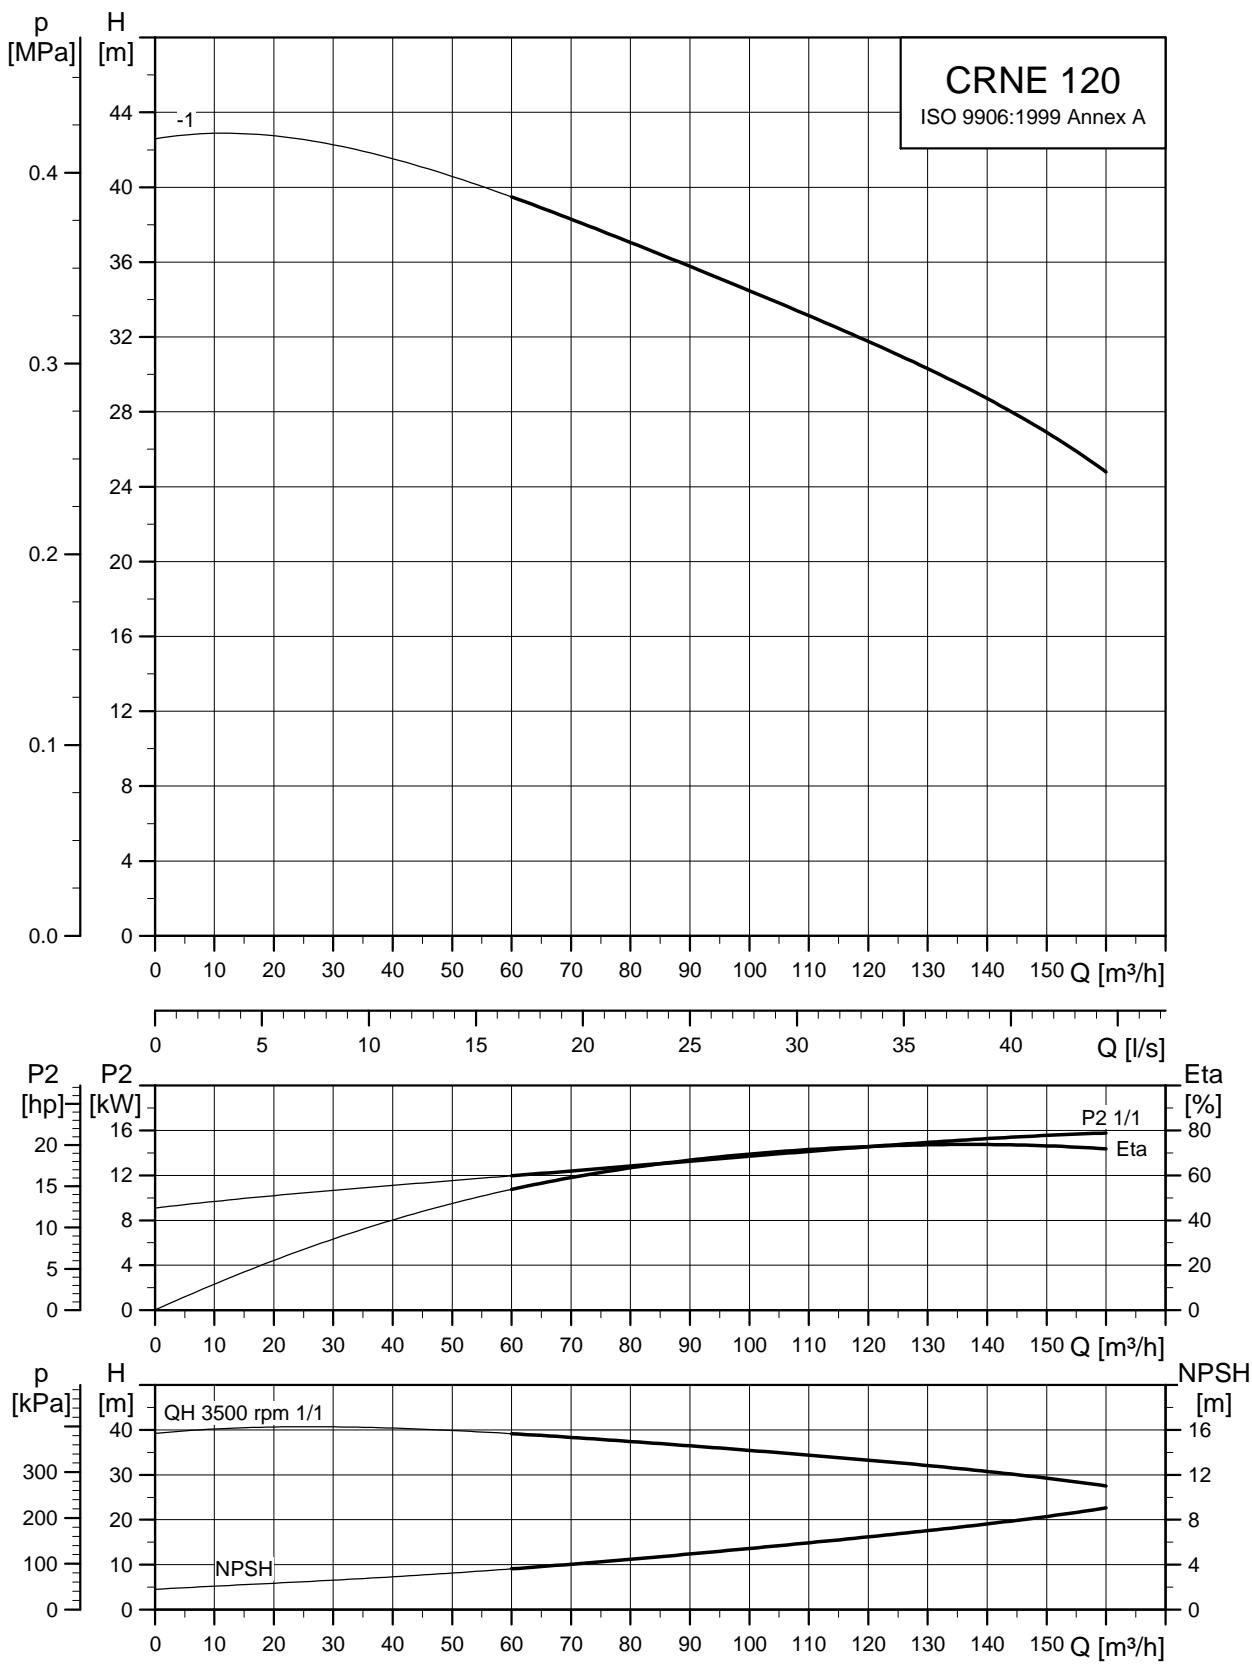
Dimensional sketches



TM05 9892 3713

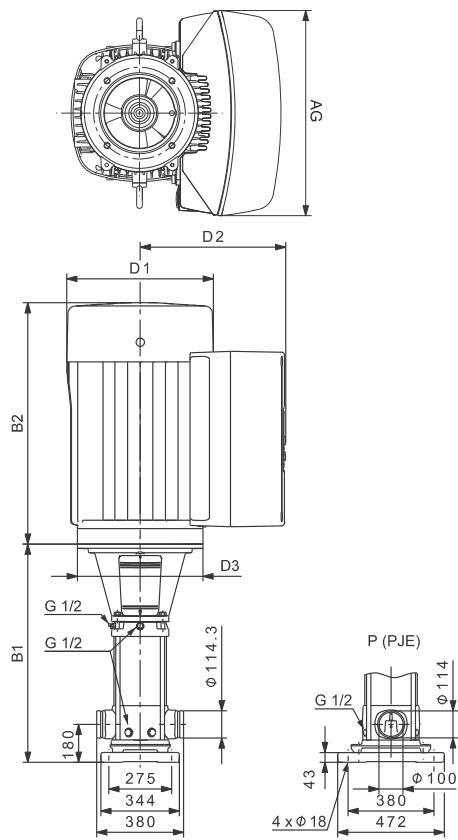
Dimensions and weights

Pump type	P_2 [kW]	CRE						Net weight [kg]	
		Dimension [mm]							
		B1	B1+B2	D1	D2	D3	AG		
CRE 120-1	18.5	834	1349	314	308	350	420	248	

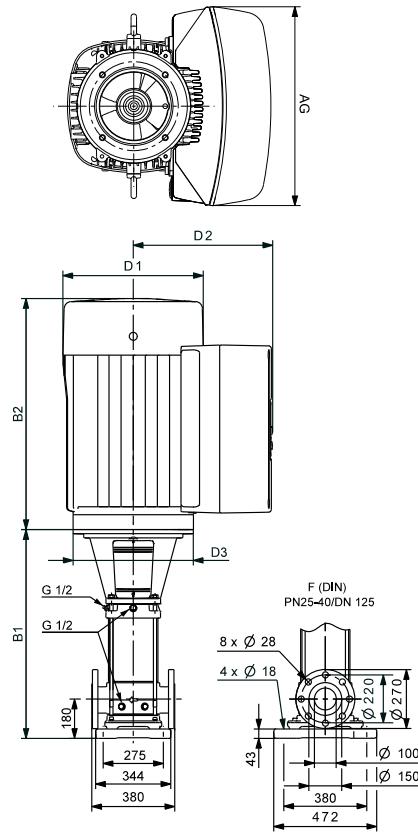
CRNE 120

TM05 6854 0313

Dimensional sketches



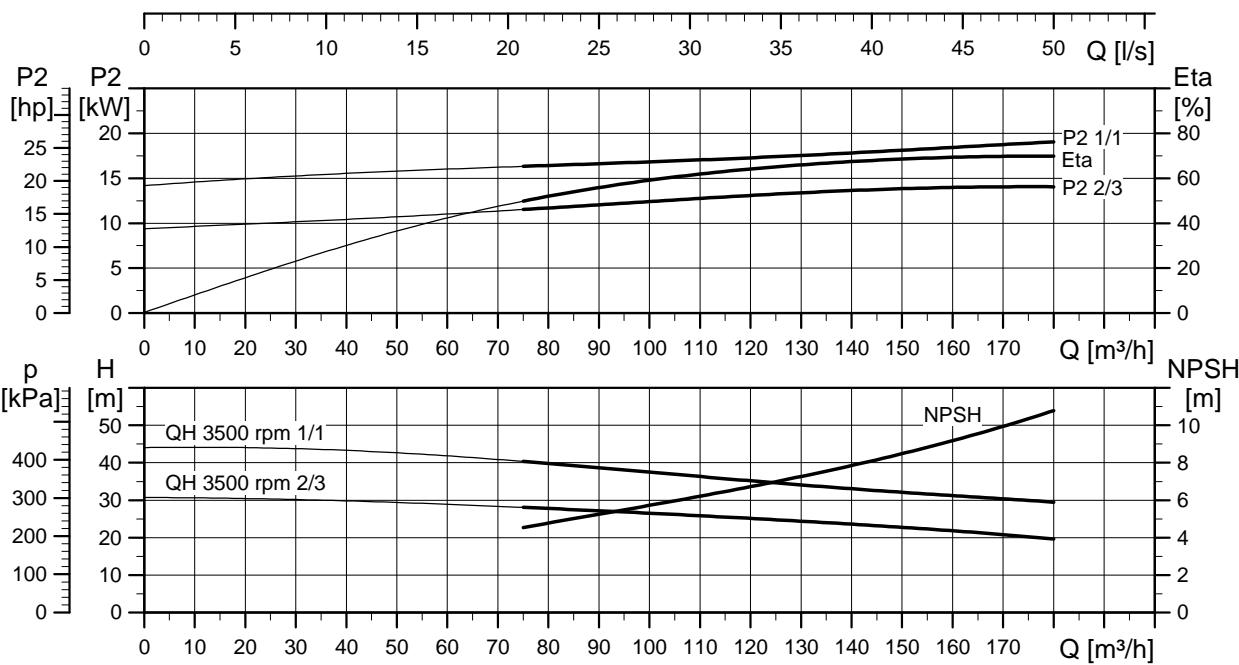
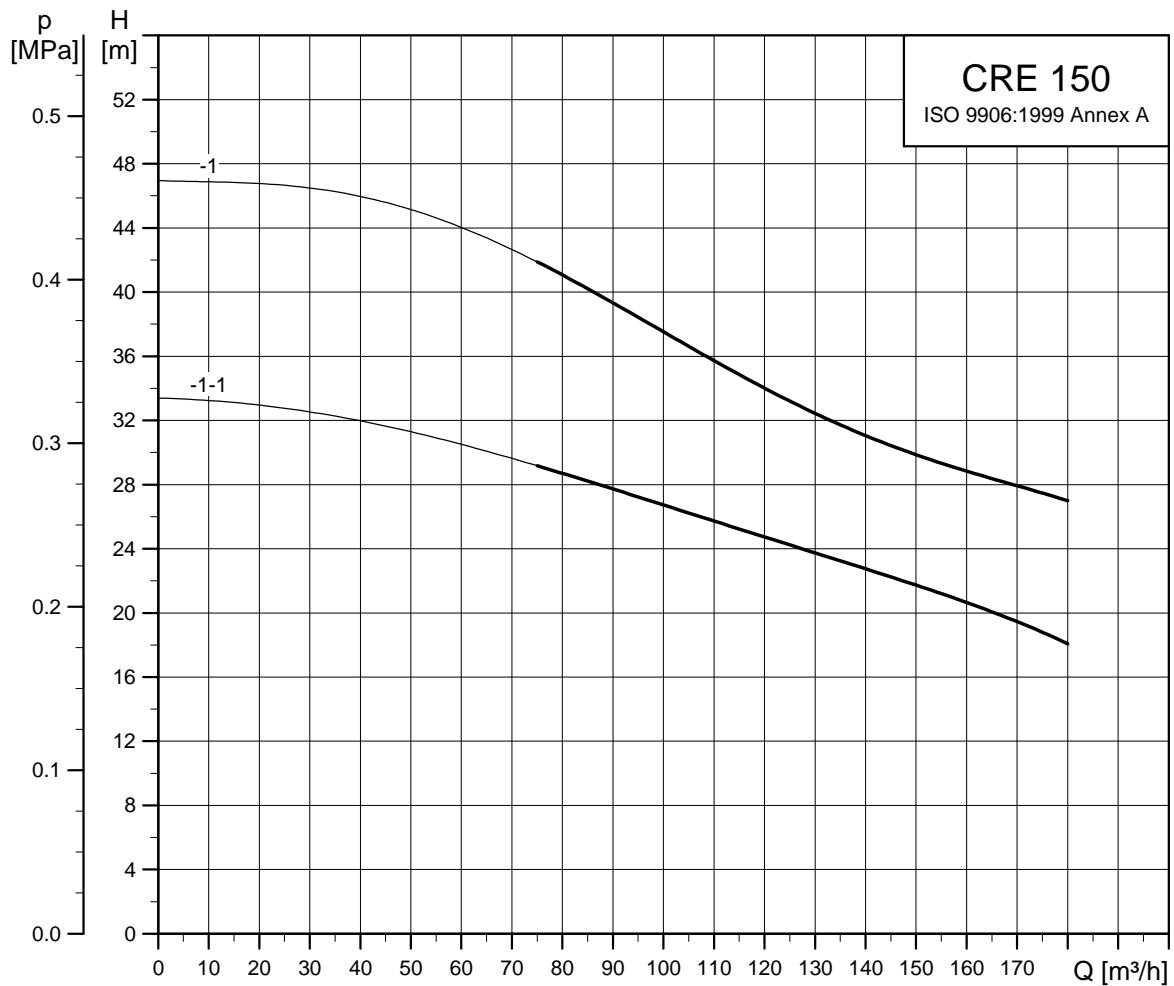
TM06 0801 0914



TM05 9393 3813

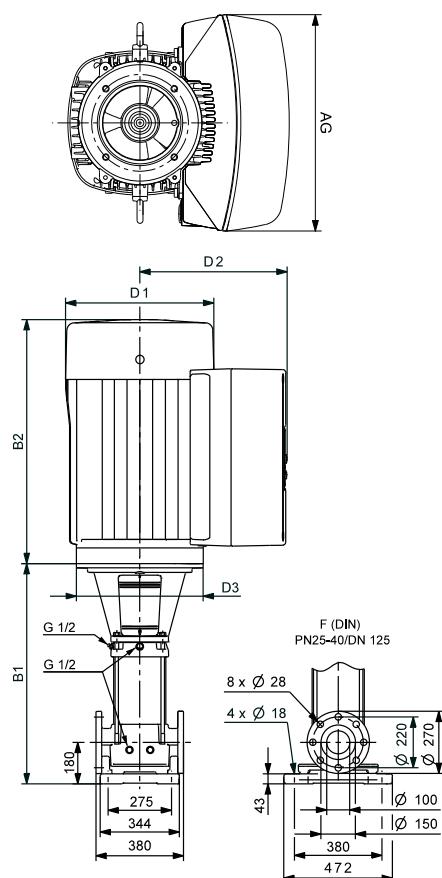
Dimensions and weights

Pump type	P_2 [kW]	CRNE						Net weight [kg]	
		Dimension [mm]							
		B1	B1+B2	D1	D2	D3	AG		
CRNE 120-1	18.5	834	1349	314	308	350	420	248	

CRE 150

TM05 6855 3513

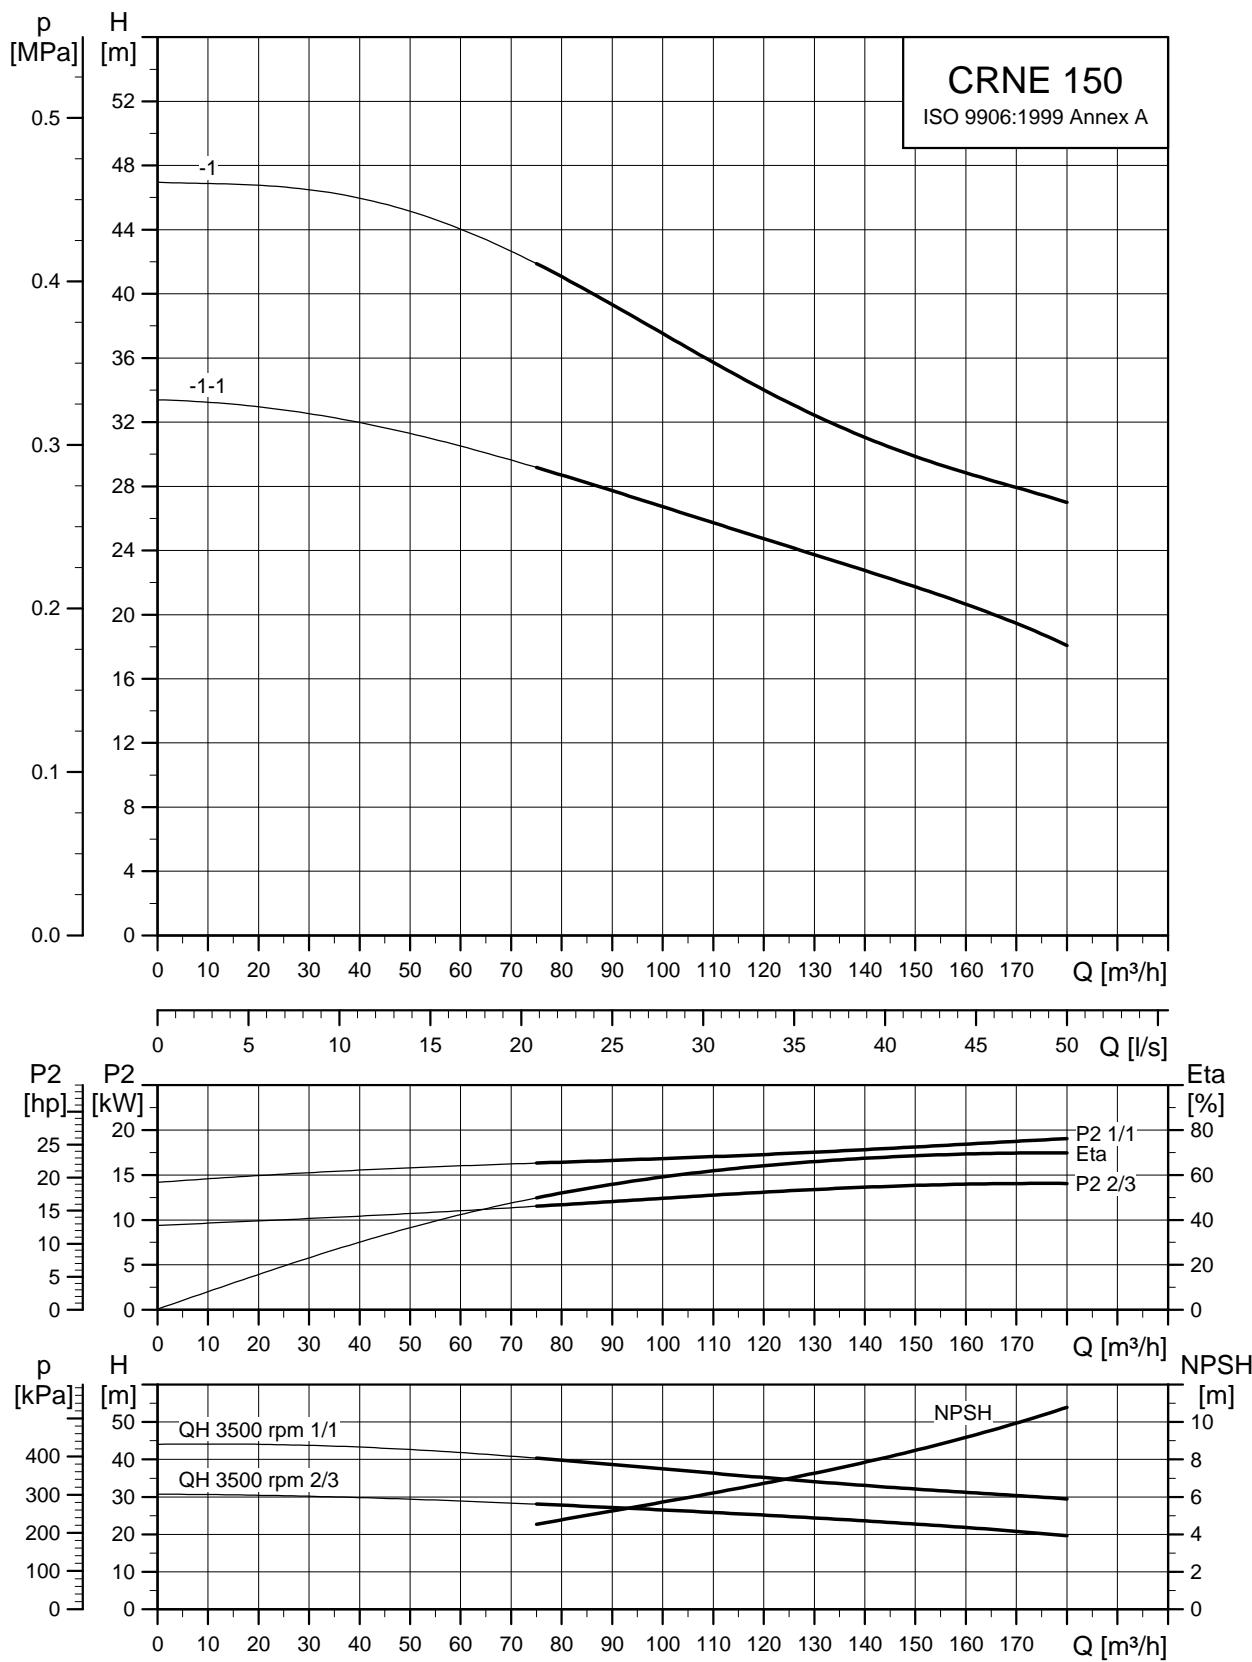
Dimensional sketches



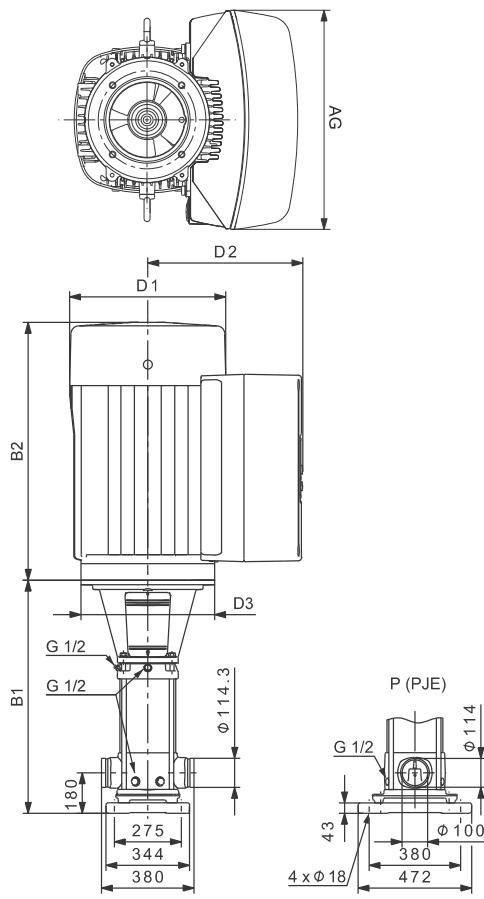
TM05 9392 3713

Dimensions and weights

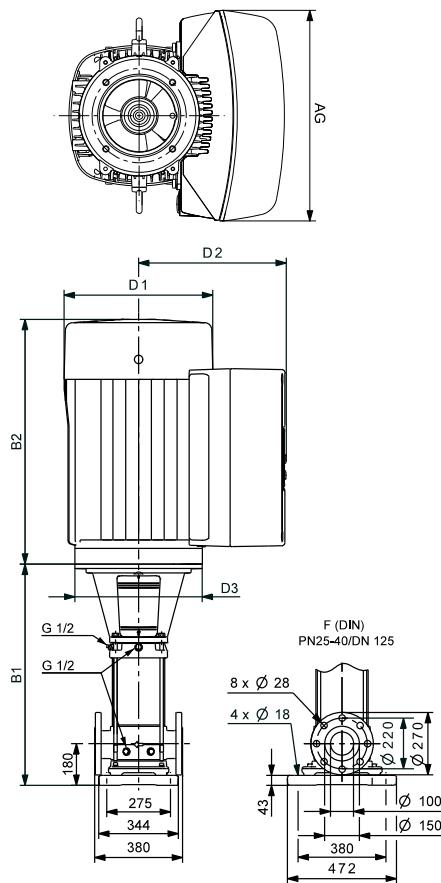
Pump type	P_2 [kW]	CRNE						Net weight [kg]
		B1	B1+B2	D1	D2	D3	AG	
CRE 150-1-1	18,5	834	1349	314	308	350	420	248
CRE 150-1	22	834	1375	314	308	350	420	261

CRNE 150

TM05 6856 3513

Dimensional sketches

TM06 0801 0914



TM05 9393 3813

Dimensions and weights

Pump type	P_2 [kW]	CRNE						Net weight [kg]
		B1	B1+B2	D1	D2	D3	AG	
CRNE 150-1-1	18.5	834	1349	314	204	350	420	252
CRNE 150-1	22	834	1375	314	204	350	420	265

8. Motor data

E-motors for CRE, CRIE, CRNE, 50/60 Hz

Motor make	P2 [kW]	Frame size	Phase	Standard voltage [V]	I _{1/1} [A]	Cos ϕ _{1/1}	η [%]	Motor efficiency class
Grundfos MGE	0.37*	71	1	200 - 240	2.4 - 2.1	0.96	84	IE4**
	0.55*	71	1	200 - 240	3.45 - 2.9	0.98	85.3	IE4**
	0.75*	80	1	200 - 240	4.7 - 3.9	0.99	85.2	IE4**
	1.1*	80	1	200 - 240	6.7 - 5.6	0.99	86.9	IE4**
	1.5*	90	1	200 - 240	9.1 - 7.6	0.99	87.4	IE4**
	0.37	71	3	380 - 500	1.05 - 1.0	0.68 - 0.54	84.5	IE4**
	0.55	71	3	380 - 500	1.35 - 1.3	0.77 - 0.61	85.9	IE4**
	0.75	80	3	380 - 500	1.7 - 1.6	0.83 - 0.67	85.9	IE4**
	1.1	80	3	380 - 500	2.2 - 1.9	0.89 - 0.79	89.1	IE4**
	1.5	90	3	380 - 500	2.9 - 2.4	0.92 - 0.85	88.9	IE4**
	2.2	90	3	380 - 500	4.15 - 3.4	0.93 - 0.87	90.1	IE4**
	3	100	3	380 - 500	5.8 - 4.8	0.91 - 0.86	90.7	IE4**
	4	112	3	380 - 500	7.6 - 6.2	0.92 - 0.87	92.2	IE4**
	5.5	132	3	380 - 500	10.3 - 8.2	0.92 - 0.88	92.7	IE4**
	7.5	132	3	380 - 500	14.1 - 11.2	0.93 - 0.89	92.5	IE4**
	11	160	3	380 - 500	20.3 - 16.0	0.93 - 0.90	93.1	IE4**
	15	160	3	380 - 480	30.0 - 26.0	0.91 - 0.86	91.9	IE3
	18.5	160	3	380 - 480	37.0 - 31.0	0.91 - 0.88	92.4	IE3
	22	180	3	380 - 480	43.5 - 35.0	0.91 - 0.90	92.7	IE3

* Pumps are normally fitted with three-phase MGE motors. Dimension tables in section [Performance curves and technical data](#) on page 29 show pumps with three-phase MGE motors.

** The IE efficiency levels are defined in IEC 60034-30-1 Ed. 1 (CD) draft. Due to the technology used in this motor, it falls outside the scope of IEC 60034-30-1 Ed. 1 (CD). Being the only defined standard at present, this standard is chosen as reference. The efficiency (including both motor and electronics) is above the IE4 level.

E-motors, CRE, CRIE, CRNE, 50/60 Hz, 3 x 200 V

Motor make	P2 [kW]	Frame size	Phase	Standard voltage [V]	I _{1/1} [A]	Cos ϕ _{1/1}	η [%]	Motor efficiency class
Grundfos MGE	1.5	90	3	200-230	5.6 - 5.1	0.95	84.0	IE2
	2.2	90	3	200-230	8.3 - 7.6	0.95	85.5	IE2
	4	112	3	200-230	13.4 - 12.8	0.94	87.5	IE2
	5.5	132	3	200-230	19.7 - 18.1	0.94 - 0.92	88.5	IE2

9. Pumped liquids

The pumps are suitable for thin, non-explosive liquids, not containing solid particles or fibres. The liquid must not chemically attack the pump materials.

When pumping liquids with a density and/or viscosity higher than that of water, use oversized motors, if required.

Whether a pump is suitable for a particular liquid depends on a number of factors of which the most important are the chloride content, pH value, temperature and content of chemicals and oils.

Please note that aggressive liquids, such as sea water and some acids, may attack or dissolve the protective oxide film of the stainless steel and thus cause corrosion.

CRE and CRIE

CRE and CRIE pumps are suitable for non-corrosive liquids.

Use CRE or CRIE pumps for liquid transfer, circulation and pressure boosting of cold or hot clean water.

CRNE

CRNE pumps are suitable for industrial liquids.

Use CRNE pumps in systems where all parts in contact with the liquid must be made of high-grade stainless steel.

CRTE

For saline or chloride-containing liquids such as sea water or for oxidising agents such as hypochlorites, we offer CRTE pumps made of titanium.

See the separate data booklet on CRTE available on www.grundfos.com (Grundfos Product Center).

List of pumped liquids

A number of typical liquids are listed on the next page.

Other pump versions may be applicable, but those stated in the list are considered to be the best choices.

The table is intended as a general guide only and cannot replace actual testing of the pumped liquids and pump materials under specific operating conditions.

However, use the list with some caution. Factors such as those mentioned below may affect the chemical resistance of a specific pump version:

- concentration of the pumped liquid
- liquid temperature
- pressure.

Take safety precautions when pumping dangerous liquids.

Notes

D Often with additives.

The density and/or viscosity differ from that/those of water.

E Take this factor into account when calculating motor output and pump performance.

F Pump selection depends on many factors. Contact Grundfos.

H Risk of crystallisation/precipitation in shaft seal.

1 Highly flammable liquid.

2 Combustible liquid.

3 Insoluble in water.

4 Low self-ignition point.

Pumped liquid	Chemical formula	Note	Liquid concentration, liquid temperature	CRE, CRIE	CRNE
Acetic acid	CH ₃ COOH	-	5 %, 20 °C	-	HQQE
Acetone	CH ₃ COCH ₃	1, F	100 %, 20 °C	-	HQQE
Alkaline degreasing agent		D, F	-	HQQE	-
Ammonium bicarbonate	NH ₄ HCO ₃	E	20 %, 30 °C	-	HQQE
Ammonium hydroxide	NH ₄ OH	-	20 %, 40 °C	HQQE	-
Aviation fuel		1, 3, 4, F	100 %, 20 °C	HQBV	-
Benzoic acid	C ₆ H ₅ COOH	H	0.5 %, 20 °C	-	HQQV
		-	< 120 °C	HQQE	-
Boiler water		F	120-180 °C	-	-
Calcareous water		-	< 90 °C	HQQE	-
Calcium acetate (as coolant with inhibitor)	Ca(CH ₃ COO) ₂	D, E	30 %, 50 °C	HQQE	-
Calcium hydroxide	Ca(OH) ₂	E	Saturated solution, 50 °C	HQQE	-
Chloride-containing water		F	< 30 °C, max. 500 ppm	-	HQQE
Chromic acid	H ₂ CrO ₄	H	1 %, 20 °C	-	HQQV
Citric acid	HOC(CH ₂ CO ₂ H) ₂ COOH	H	5 %, 40 °C	-	HQQE
Completely desalinated water (demineralised water)		-	120 °C	-	HQQE
Condensate		-	120 °C	HQQE	-
Copper sulphate	CuSO ₄	E	10 %, 50 °C	-	HQQE
Corn oil		D, E, 3	100 %, 80 °C	HQQV	-
Diesel oil		2, 3, 4, F	100 %, 20 °C	HQBV	-
Domestic hot water (potable water)		-	< 120 °C	HQQE	-
Ethanol (ethyl alcohol)	C ₂ H ₅ OH	1, F	100 %, 20 °C	HQQE	-
Ethylene glycol	HOCH ₂ CH ₂ OH	D, E	50 %, 50 °C	HQQE	-
Formic acid	HCOOH	-	5 %, 20 °C	-	HQQE
Glycerine (glycerol)	OHCH ₂ CH(OH)CH ₂ OH	D, E	50 %, 50 °C	HQQE	-
Hydraulic oil (mineral)		E, 2, 3	100 %, 100 °C	HQQV	-
Hydraulic oil (synthetic)		E, 2, 3	100 %, 100 °C	HQQV	-
Isopropyl alcohol	CH ₃ CHOHCH ₃	1, F	100 %, 20 °C	HQQE	-
Lactic acid	CH ₃ CH(OH)COOH	E, H	10 %, 20 °C	-	HQQV
Linoleic acid	C ₁₇ H ₃₁ COOH	E, 3	100 %, 20 °C	HQQV	-
Methanol (methyl alcohol)	CH ₃ OH	1, F	100 %, 20 °C	HQQE	-
Motor oil		E, 2, 3	100 %, 80 °C	HQQV	-
Naphthalene	C ₁₀ H ₈	E, H	100 %, 80 °C	HQQV	-
Nitric acid	HNO ₃	F	1 %, 20 °C	-	HQQE
Oil-containing water		-	< 100 °C	HQQV	-
Olive oil		D, E, 3	100 %, 80 °C	HQQV	-
Oxalic acid	(COOH) ₂	H	1 %, 20 °C	-	HQQE
Ozone-containing water	(O ₃)	-	< 100 °C	-	HQQE
Peanut oil		D, E, 3	100 %, 80 °C	HQQV	-
Petrol		1, 3, 4, F	100 %, 20 °C	HQBV	-
Phosphoric acid	H ₃ PO ₄	E	20 %, 20 °C	-	HQQE
Propanol	C ₃ H ₇ OH	1, F	100 %, 20 °C	HQQE	-
Propylene glycol	CH ₃ CH(OH)CH ₂ OH	D, E	50 %, 90 °C	HQQE	-
Potassium carbonate	K ₂ CO ₃	E	20 %, 50 °C	HQQE	-
Potassium formate (as coolant with inhibitor)	KOOCH	D, E	30 %, 50 °C	HQQE	-
Potassium hydroxide	KOH	E	20 %, 50 °C	-	HQQE
Potassium permanganate	KMnO ₄	-	5 %, 20 °C	-	HQQE
Rape seed oil		D, E, 3	100 %, 80 °C	HQQV	-
Salicylic acid	C ₆ H ₄ (OH)COOH	H	0.1 %, 20 °C	-	HQQE

Pumped liquid	Chemical formula	Note	Liquid concentration, liquid temperature	CRE, CRIE	CRNE
Silicone oil		E, 3	100 %	HQQV	-
Sodium bicarbonate	NaHCO ₃	E	10 %, 60 °C	-	HQQE
Sodium chloride (as coolant)	NaCl	D, E	30 %, < 5 °C, pH > 8	HQQE	-
Sodium hydroxide	NaOH	E	20 %, +0 °C	-	HQQE
Sodium hypochlorite	NaOCl	F	0.1 %, 20 °C	-	HQQV
Sodium nitrate	NaNO ₃	E	10 %, 60 °C	-	HQQE
Sodium phosphate	Na ₃ PO ₄	E, H	10 %, 60 °C	-	HQQE
Sodium sulphate	Na ₂ SO ₄	E, H	10 %, 60 °C	-	HQQE
Softened water		-	< 120 °C	-	HQQE
Soya oil		D, E, 3	100 %, 80 °C	HQQV	-
Sulphuric acid	H ₂ SO ₄	F	1 %, 20 °C	-	HQQV
Sulphurous acid	H ₂ SO ₃	-	1 %, 20 °C	-	HQQE
Unsalted swimming-pool water		-	Approx. 2 ppm free chlorine (Cl ₂)	HQQE	-



10. Accessories

Pipe connection

Various sets of counter-flanges and couplings are available for pipe connection.

Adapter kit

DN 150 flanges are available for CRE, CRNE 120 and 150 pumps. To use DN 150 flanges, you must order two adapter kits per pump.




Adapter kit	Pump type	Pipe connection	Adapter kits required	Product number
 TM04 0021 4807	CRE 120 CRE 150	150 mm, nominal	2	96638169
 TM04 0020 4807	CRNE 120 CRNE 150	150 mm, nominal	2	96638180



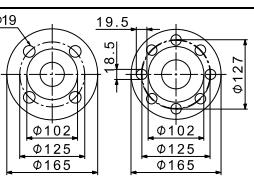
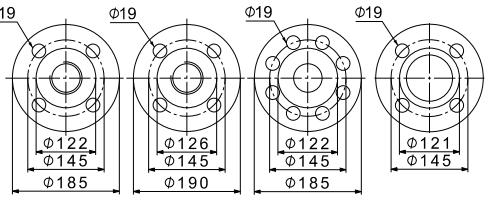

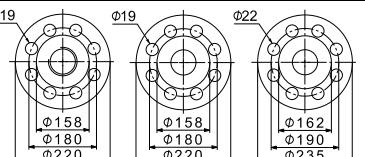


We offer an optional 6" pump base for the CRN 90, 120 and 150 pump ranges with DN 150 connections according to DIN, ANSI and JIS standards. This base eliminates the need for an adapter kit.

For more information, see CR "Custom-built pumps" data booklet on www.grundfos.com (Grundfos Product Center).

Counter-flanges for CRE

A set consists of one counter-flange, one gasket, bolts and nuts.

Counter-flange	Pump type	Description	Rated pressure	Pipe connection	Product number
 TM05 0998 2011	CRE 1 CRE 3 CRE 5	Threaded	16 bar, EN 1092-2	Rp 1	409901
		For welding	25 bar, EN 1092-2	25 mm, nominal	409902
 TM05 1003 2011	CRE 1 CRE 3 CRE 5	Threaded	16 bar, EN 1092-2	Rp 1 1/4	419901
		For welding	25 bar, EN 1092-2	32 mm, nominal	419902
 TM05 1002 2011	CRE 10	Threaded	16 bar, EN 1092-2	Rp 1 1/2	429902
		Threaded	16 bar, EN 1092-2	Rp 2	429904
		For welding	25 bar, EN 1092-2	40 mm, nominal	429901
		For welding	40 bar, special flange	50 mm, nominal	429903






Counter-flange	Pump type	Description	Rated pressure	Pipe connection	Product number
	Threaded	16 bar, EN 1092-2	Rp 2	339903	
	Threaded	16 bar, special flange	Rp 2 1/2	339904	
	TM05 0999 2011	CRE 15 CRE 20	Threaded	16 bar, special flange	Rp 2 1/2* 96509578
	TM05 1005 2011				
	TM05 1000 2011		For welding	25 bar, EN 1092-2	50 mm, nominal 339901
			For welding	40 bar, special flange	65 mm, nominal 339902
	TM05 0997 2011	CRE 32	Threaded	16 bar, EN 1092-2	Rp 2 1/2 349902
			Threaded	16 bar, special flange	Rp 3 349901
			For welding	16 bar, EN 1092-2	65 mm, nominal 349904
			For welding	40 bar, DIN 2635	65 mm, nominal 349905
			For welding	16 bar, special flange	80 mm, nominal 349903
	TM05 0986 2011	CRE 45	Threaded	16 bar	Rp 3 350540
			For welding	16 bar	80 mm, nominal 350541
			For welding	40 bar	80 mm, nominal 350542
	TM05 0985 2011	CRE 64 CRE 90	Threaded	16 bar, EN 1092-2	Rp 4 369901
			For welding	16 bar, EN 1092-2	100 mm, nominal 369902
			For welding	25 bar, EN 1092-2	100 mm, nominal 369905
	TM03 8892 2707	CRE 120	For welding	40 bar, EN 1092-2	125 mm, nominal 96750475
	TM03 8891 2707	CRE 150	For welding	40 bar, EN 1092-2	150 mm, nominal 96750476






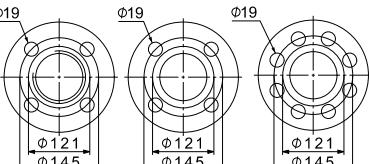
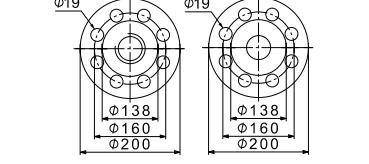
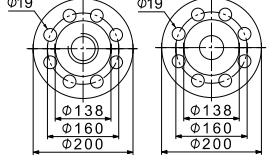
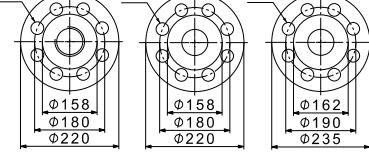


* Flange with 20 mm higher collar. With this collar, the installation dimensions of a CRE 20 will be identical to those of a CRE 32.
If a CRE 32 is replaced by a CRE 20, the base must be raised by 15 mm.

Counter-flanges for CRNE

Counter-flanges for CRNE pumps are made of stainless steel EN 1.4401 (AISI 316).

A set consists of one counter-flange, one gasket, bolts and nuts.

Counter-flange	Pump type	Description	Rated pressure	Pipe connection	Product number
 TM05 0998 2011	CRIE 1, 3, 5 CRNE 1, 3, 5	Threaded	16 bar, EN 1092-1	Rp 1	405284
		For welding	25 bar, EN 1092-1	25 mm, nominal	405285
 TM05 1003 2011	CRIE 1, 3, 5 CRNE 1, 3, 5	Threaded	16 bar, EN 1092-1	Rp 1 1/4	415304
		For welding	25 bar, EN 1092-1	32 mm, nominal	415305
 TM05 1001 2011	CRIE 10 CRNE 10	Threaded	16 bar, EN 1092-1	Rp 1 1/2	425245
 TM05 1006 2011		Threaded	16 bar, EN 1092-1	Rp 2	96509570
 TM05 1001 2011	CRIE 10 CRNE 10	For welding	25 bar, EN 1092-1	40 mm, nominal	425246
 TM05 1006 2011		For welding	25 bar, special flange	50 mm, nominal	96509571



Counter-flange	Pump type	Description	Rated pressure	Pipe connection	Product number
			Threaded 16 bar, EN 1092-1	Rp 2	335254
			Threaded 16 bar, special flange	Rp 2 1/2	96509575
	TM05 1005 2011	CRIE 15, 20 CRNE 15, 20	Threaded 16 bar, special flange	Rp 2 1/2*	96509579
	TM03 0402 2011		For welding 25 bar, EN 1092-1	50 mm, nominal	335255
	TM00 7203 2803		For welding 25 bar, special flange	65 mm, nominal	96509573
	TM05 0994 2011	CRNE 32	Threaded 16 bar	Rp 2 1/2	349910
			Threaded 16 bar, special flange	Rp 3	349911
			For welding 16 bar	65 mm, nominal	349906
			For welding 40 bar	65 mm, nominal	349908
	TM05 0996 2011	CRNE 45	Threaded 16 bar	Rp 3	350543
			For welding 16 bar	80 mm, nominal	350544
			For welding 40 bar	80 mm, nominal	350545
	TM05 0995 2011	CRNE 64 CRNE 90	Threaded 16 bar	Rp 4	369904
			For welding 16 bar	100 mm, nominal	369903
			For welding 40 bar	100 mm, nominal	369906
	TM03 8891 2707	CRNE 120 CRNE 150	For welding 40 bar, EN 1092-1	125 mm, nominal	96750477
			For welding 40 bar, EN 1092-1	150 mm, nominal	96750478

* Flange with 20 mm higher collar. With this collar, the installation dimensions of a CRE 20 will be identical to those of a CRE 32.
If a CRE 32 is replaced by a CRE 20, the base must be raised by 15 mm.

PJE couplings for CRNE

Materials in contact with the pumped liquid are made of stainless steel EN 1.4401 (AISI 316) and rubber.




A coupling set consists of two coupling halves (Victaulic type 77), one gasket, one pipe stub (for welding or threaded), bolts and nuts.





Coupling	Pump type	Pipe stub	Max. pressure [bar]	A	B	Pipe connection	Rubber parts	Coupling sets required	Product number
	CRN 1s, 1, 3, 5	Threaded	69	50	320	R 1 1/4	EPDM	2	419911
		For welding	69	50	280	DN 32	FKM	2	419905
	CRN 10, 15, 20	Threaded	69	80	377	R 2	EPDM	2	419912
		For welding	69	80	371	DN 50	FKM	2	419904
		Threaded	69	80	377	R 2	EPDM	2	339911
		For welding	69	80	371	DN 50	FKM	2	339918
	CRN 32	For welding	69	105	420	DN 80	EPDM	2	98144746
	For welding	69	140	465	DN 100	FKM	2	98144749	
	CRN 45, 64	For welding	69	140	465	DN 100	EPDM	2	98144752
		For welding	69	140	480	DN 100	FKM	2	98144755
	CRN 90	For welding	69	180	480	DN 100	EPDM	2	98144752
		For welding	69	180	480	DN 100	FKM	2	98144755
	CRN 120, 150	For welding	69	180	480	DN 100	EPDM	2	98144752
	For welding	69	180	480	DN 100	FKM	2	98144755	





TM03 8890 2707 - TM00 3808 1094

FlexiClamp base connections

All sets comprise the necessary number of bolts and nuts as well as a gasket/O-ring.

Base connection	Pump type	Connection	Pipe connection	PN	A	B	Rubber parts	Coupling sets required	Product number
	CRIE 1, 3, 5 CRNE 1, 3, 5	Oval (cast iron)	RP 1					1	96449748
			RP 1 1/4					1	96449749
		Oval (stainless steel)	RP 1	16	50	210	Klingsil	2	96449746
			RP 1 1/4					2	96449747
	CRIE 1, 3, 5 CRNE 1, 3, 5	Union					EPDM	2	96449743
							FKM	2	96449744
	CRIE 1, 3, 5 CRNE 1, 3, 5	DIN (stainless steel)		DN 25			EPDM	2	96449745
				DN 32	16	75	250		FKM
									96449900

Base connection	Pump type	Connection	Pipe connection	PN	A	B	Rubber parts	Coupling sets required	Product number
	CRIE 1, 3, 5 CRNE 1, 3, 5	Clamp, threaded pipe stub	Rp 1				EPDM	2	405280
							FKM	2	405281
							EPDM	2	415296
			Rp 1 1/4	208			FKM	2	415297
							EPDM	2	405291
		Clamp, pipe stub for welding	1" NPT	25	50		FKM	2	405292
							EPDM	2	415311
			1 1/4" NPT	28.5			FKM	2	415312
							EPDM	2	405282
							FKM	2	405283
			28.5	37.2			EPDM	2	415300
							FKM	2	415301
	CRIE 10 CRNE 10	Oval (cast iron)	Rp 1 1/4					2	96498775
								2	96498727
			Rp 1 1/2					2	96498836
								2	96498776
			Rp 2	16	80	260	Klingsersil	2	96498728
								2	96498835
		Oval (stainless steel)	Rp 1 1/4					2	96498840
								2	96500119
			Rp 1 1/2					2	96500263
								2	96500264
			Rp 2	16	80	288	EPDM	2	96500265
	CRIE 10 CRNE 10	Union						2	96500266
		G 2 3/4	25	80	288	FKM	2	96500267	
							2	96500276	
		FGJ (cast iron)				EPDM	2	96498840	
						FKM	2	96500119	
		DN 40	FGJ (stainless steel)				EPDM	2	96500263
							FKM	2	96500264
			DN 50	16	80	316	EPDM	2	96500265
								2	96500266
			FGJ (stainless steel)				EPDM	2	96500267
							FKM	2	96500269
	CRIE 10 CRNE 10	Clamp, threaded pipe stub	Rp 1 1/2				EPDM	2	425238
							FKM	2	425239
			Rp 2	259			EPDM	2	335241
							FKM	2	335242
			Rp 2 1/2	25	80	346	EPDM	2	96508600
								2	96508601
		Clamp, pipe stub for welding	48.3 (DN 40)				EPDM	2	425242
							FKM	2	425243
			60.3 (DN 50)				EPDM	2	335251
							FKM	2	335252

Base connection	Pump type	Connection	Pipe connection	PN	A	B	Rubber parts	Number of coupling sets required	Product number
	CRIE 15, 20 CRNE 15, 20	Oval (cast iron)	Rp 1 1/4					2	96498775
			Rp 1 1/2					2	96498727
			Rp 2	10	90	260	Klingsersil	2	96498836
			Rp 1 1/4					2	96498776
		Oval (stainless steel)	Rp 1 1/2					2	96498728
			Rp 2					2	96498835
	CRIE 15, 20 CRNE 15, 20	Union					EPDM	2	96500275
			G 2 3/4	25	90	288			
							FKM	2	96500276
	CRIE 15, 20 CRNE 15, 20	FGJ (cast iron)					EPDM	2	96498840
							FKM	2	96500119
			DN 40						
							EPDM	2	96500263
		FGJ (stainless steel)		10	90	334			
							FKM	2	96500264
							EPDM	2	96500265
							FKM	2	96500266
	CRIE 15, 20 CRNE 15, 20	FGJ (cast iron)					EPDM	2	96500267
							FKM	2	96500269
		Clamp, threaded pipe stub	Rp 1 1/2				EPDM	2	425238
							FKM	2	425239
			259				EPDM	2	335241
							FKM	2	335242
	CRIE 15, 20 CRNE 15, 20	Rp 2							
		Rp 2 1/2	25	90	346		EPDM	2	96508600
							FKM	2	96508601
							EPDM	2	425242
		Clamp, pipe stub for welding	48.3 (DN 40)	-			FKM	2	425243
							EPDM	2	335251
			60.3 (DN 50)	-			FKM	2	335252

Potentiometer

The potentiometer is suitable for setpoint setting and start/stop of the CRE, CRIE, CRNE pump.

Product	Product number
External potentiometer with cabinet for wall mounting	625468

EMC filter

The EMC filter is required when 11 to 22 kW E-pumps are installed in residential areas.

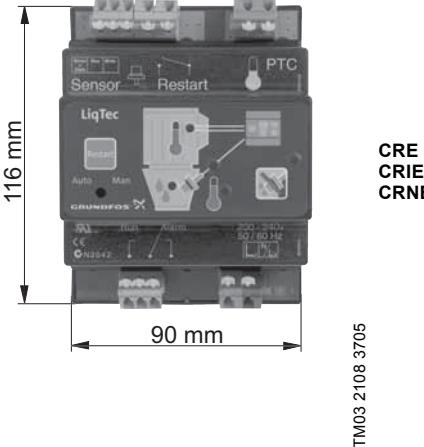
Product	Product number
EMC filter (11 kW)	
EMC filter (15 kW)	
EMC filter (18.5 kW)	96478309
EMC filter (22 kW)	

LiqTec

The LiqTec dry-running protection unit protects the pump and process against dry running and temperatures exceeding 130 ± 5 °C. Connected to the motor PTC sensor, the LiqTec also monitors the motor temperature.

The LiqTec is prepared for DIN rail mounting in control cabinet.

Enclosure class: IPX0.

LiqTec unit	Pump type	Voltage [V]	LiqTec	Sensor 1/2"	Cable 5 m	Extension cable 15 m	Product number
		200-240	•	•	•	-	96556429
		80-130	•	•	•	-	96556430
		-	-	-	-	•	96443676
		-	-	-	•	•	96556427

Sensors

Grundfos Vortex Flow sensor, VFI ¹⁾	Type	Flow range [m ³ /h]	Pipe connection	O-ring		Connection type		Product number
				EPDM	FKM	Cast-iron flange	Stainless-steel flange	
VFI 1.3-25 DN32 020 E	VFI 1.3-25 DN32 020 E	1.3 - 25	DN 32	•	•	•	•	97686141
	VFI 1.3-25 DN32 020 F				•	•	•	97686142
	VFI 1.3-25 DN32 020 E			•			•	97688297
	VFI 1.3-25 DN32 020 F				•		•	97688298
	VFI 2-40 DN40 020 E			•	•	•	•	97686143
	VFI 2-40 DN40 020 F	2 - 40		•	•	•	•	97686144
	VFI 2-40 DN40 020 E			•			•	97688299
	VFI 2-40 DN40 020 F				•		•	97688300
	VFI 3.2-64 DN50 020 E			•	•	•	•	97686145
	VFI 3.2-64 DN50 020 F	2 - 64		•	•	•	•	97686146
VFI 3.2-64 DN50 020 E	VFI 3.2-64 DN50 020 E		DN 50	•			•	97688301
	VFI 3.2-64 DN50 020 F				•		•	97688302
	VFI 5.2-104 DN65 020 E			•	•	•	•	97686147
	VFI 5.2-104 DN65 020 F	5.2 - 104		•	•	•	•	97686148
	VFI 5.2-104 DN65 020 E			•			•	97688303
	VFI 5.2-104 DN65 020 F				•		•	97688304
	VFI 8-160 DN80 020 E			•	•	•	•	97686149
	VFI 8-160 DN80 020 F	8 - 160		•	•	•	•	97686150
	VFI 8-160 DN80 020 E			•			•	97688305
	VFI 8-160 DN80 020 F				•		•	97688306
VFI 12-240 DN100 020 E	VFI 12-240 DN100 020 E		DN 100	•	•	•	•	97686151
	VFI 12-240 DN100 020 F			•	•	•	•	97686152
	VFI 12-240 DN100 020 E			•			•	97688308
	VFI 12-240 DN100 020 F				•		•	97688309

¹⁾ For more information about the VFI sensor, see the Grundfos Direct Sensors™ data booklet, publication number 97790189, on www.grundfos.com (Grundfos Product Center).

Accessory	Type	Supplier	Measuring range	Product number
Flowmeter	SITRANS F M MAGFLO MAG 5100 W	Siemens	1-5 m ³ (DN 25)	ID8285
	SITRANS F M MAGFLO MAG 5100 W		3-10 m ³ (DN 40)	ID8286
	SITRANS F M MAGFLO MAG 5100 W		6-30 m ³ (DN 65)	ID8287
	SITRANS F M MAGFLO MAG 5100 W		20-75 m ³ (DN 100)	ID8288
Temperature sensor	TTA (0) 25	Carlo Gavazzi	0 to +25 °C	96432591
	TTA (-25) 25		-25 to +25 °C	96430194
	TTA (50) 100		+50 to +100 °C	96432592
	TTA (0) 150		0 to +150 °C	96430195
Accessory for temperature sensor. All with 1/2 RG connection	Protecting tube Ø9 x 50 mm			96430201
	Protecting tube Ø9 x 100 mm			96430202
	Cutting ring bush			96430203
Temperature sensor, ambient temperature	WR 52	tmg (DK: Plesner)	-50 - +50 °C	ID8295
Differential-temperature sensor	ETSD	Honsberg	0-20 °C	96409362
			0-50 °C	96409363

Note: All sensors have 4-20 mA signal output.



Danfoss pressure sensor kits

Content	Liquid temperature	Pressure [bar]	Product number
<ul style="list-style-type: none"> Danfoss pressure sensor, type MBS 3000, with 2 m screened cable. Connection: G 1/2 A (DIN 16288 - B6kt) 5 cable clips (black) Instructions PT (400212) 	-40 to +85 °C	0-4	96428014
		0-6	96428015
		0-10	96428016
		0-16	96428017
		0-25	96428018

DPI differential-pressure sensor kit

Content	Pressure [bar]	Product number
<ul style="list-style-type: none"> 1 sensor incl. 0.9 m screened cable (7/16" connections) 1 original DPI bracket for wall mounting 1 Grundfos bracket for mounting on motor 2 M4 screws for mounting of sensor on bracket 1 M6 screw (self-cutting) for mounting on MGE 90/100 1 M8 screw (self-cutting) for mounting on MGE 112/132 3 capillary tubes (short/long) 2 fittings (1/4" - 7/16") 5 cable clips (black) Installation and operating instructions (00480675) Service kit instructions. 	0 - 0.6	96611522
	0 - 1.0	96611523
	0 - 1.6	96611524
	0 - 2.5	96611525
	0 - 4.0	96611526
	0 - 6.0	96611527
	0-10	96611550

Adjustable anti-vibration feet

TM04 3245 4016

The Adjustable support foot reduce any vibrations from the system to the floor, allowing the system to be height-adjusted by ± 20 mm.

Description	Pump type	Product number
1 pcs. anti-vibration foot	CR(I)E 3 and 5	96412344
	CR(I)E 10 to 20	96412345
	CRE 32 to 90	96412347

Control MPC



TM05 3232 1012

The Grundfos Control MPC is a complete control cabinet with a built-in CU 352 multipump control unit, main switch, contactors, IO 351 modules, cabling, etc. The Control MPC is designed for the control and monitoring of up to six identical pumps connected in parallel. The Control MPC is supplied with all necessary components and contains application-optimised software.

For further information, please see the Control MPC Data Booklet on product-selection.grundfos.com

Remote controls

R100 remote control

The R100 is used for wireless communication with the CRE, CRIE or CRNE pump. The R100 communicates with the pump via infrared light.

Product	Product number
R100	96615297

Grundfos GO Remote

The Grundfos GO Remote is used for wireless infrared or radio communication with the pumps.

Various Grundfos GO Remote variants are available. The variants are described in the following.

MI 202 and MI 204

The MI 202 and MI 204 are add-on modules with built-in infrared and radio communication. The MI 202 can be used in conjunction with an Apple iPhone or iPod with 30-pin connector and iOS 5.0 or later, e.g. fourth generation iPhone or iPod.

The MI 204 can be used in conjunction with an Apple iPhone or iPod with Lightning connector, e.g. fifth generation iPhone or iPod.

(The MI 204 is also available together with an Apple iPod touch and a cover.)

TM05 3887 1612
TM05 7704 1513

Fig. 32 MI 202 and MI 204

Supplied with the product:

- Grundfos MI 202 or 204
- sleeve
- quick guide
- charger cable.

MI 301

The MI 301 is a module with built-in infrared and radio communication. The MI 301 can be used in conjunction with Android or iOS-based smart devices with a Bluetooth connection. The MI 301 has rechargeable Li-ion battery and must be charged separately.



TM05 3890 1712

Fig. 33 MI 301

Supplied with the product:

- Grundfos MI 301
- sleeve
- battery charger
- quick guide.

Product numbers

Grundfos GO Remote variant	Product number
Grundfos MI 202	98046376
Grundfos MI 204	98424092
Grundfos MI 204 including iPod touch	98612711
Grundfos MI 301	98046408

CIU communication interface units



GIA 6118

Fig. 34 Grundfos CIU communication interface unit

The CIU units enable communication of operating data, such as measured values and setpoints, between CRE, CRIE, CRNE pumps and a building management system. The CIU unit incorporates a 24-240 VAC/VDC power supply module and a CIM module. It can either be mounted on a DIN rail or on a wall.

We offer the following CIU units:

CIU 100

For communication via LonWorks.

CIU 150

For communication via PROFIBUS DP.

CIU 200

For communication via Modbus RTU.

CIU 250

For wireless communication via GSM/GPRS.

CIU 271

For communication via Grundfos Remote Management (GRM).

CIU 300

For communication via BACnet MS/TP.

Description	Fieldbus protocol	Product number
CIU 100	LonWorks	96753735
CIU 150	PROFIBUS DP	96753081
CIU 200	Modbus RTU	96753082
CIU 250*	GSM/GPRS	96787106
CIU 271*	GRM	96898819
CIU 300	BACnet MS/TP	Contact Grundfos

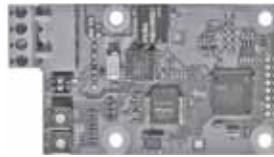
* Antenna not included. See below.

Antennas for CIU 250 and 270

Description	Product number
Antenna for roof	97631956
Antenna for desk	97631957

For further information about data communication via CIU units and fieldbus protocols, see the CIU documentation available on www.grundfos.com (Grundfos Product Center).

CIM communication interface modules



GIA 6121

Fig. 35 Grundfos CIM communication interface module

The CIM modules enable communication of operating data, such as measured values and setpoints, between CRE, CRIE or CRNE pumps of 11-22 kW and a building management system. The CIM modules are add-on communication modules which are fitted in the terminal box of CRE, CRIE, CRNE pumps of 11-22 kW.

Note: CIM modules must be fitted by authorised personnel.

We offer the following CIM modules:

CIM 100

For communication via LonWorks.

CIM 150

For communication via PROFIBUS DP.

CIM 200

For communication via Modbus RTU.

CIM 250

For wireless communication via GSM/GPRS.

CIM 271

For communication via Grundfos Remote Management (GRM).

CIM 300

For communication via BACnet MS/TP.

Description	Fieldbus protocol	Product number
CIM 100	LonWorks	96824797
CIM 150	PROFIBUS DP	96824793
CIM 200	Modbus RTU	96824796
CIM 250*	GSM/GPRS	96824795
CIM 271*	GRM	96898815
CIM 300	BACnet MS/TP	Contact Grundfos

* Antenna not included. See below.

Antennas for CIM 250 and 270

Description	Product number
Antenna for roof	97631956
Antenna for desk	97631957

For further information about data communication via CIM modules and fieldbus protocols, see the CIM documentation available on www.grundfos.com (Grundfos Product Center).

11. Variants

The variants are available on request.

Although the Grundfos CRE, CRIE, CRNE product range offers a number of pumps for different applications, customers require specific pump solutions to satisfy their needs. See the following documents:

- Grundfos CR "Custom-built pumps" data booklet
- Grundfos "CRN high pressure" data booklet.

Below please find the range of options available for customising the CRE pumps to meet the customers' demands.

Contact Grundfos for further information or for requests other than the ones mentioned below.

Motors

Variant	Description
ATEX-approved motor	For operation in hazardous atmospheres, explosion-proof or dust-ignition-proof motors may be required.
Motor with anti-condensation heating unit	For operation in humid environments, motors with built-in anti-condensation heating unit may be required.
Motor with thermal protection	We offer motors with built-in bimetallic thermal switches or temperature-controlled PTC sensors (thermistors) incorporated in the motor windings.
Oversize motor	Ambient temperatures above 40 °C or installation at altitudes of more than 1000 metres above sea level require the use of an oversize motor, i.e. derating.
4-pole motor	We offer 4-pole standard motors.

Shaft seals

Variant	Description
Shaft seal with FFKM O-ring	We recommend shaft seals with FFKM or FXM O-ring for applications where the pumped liquid may damage the standard O-ring material.
Seal with flush, quench seal	We recommend seals with flush/quench seals for applications involving crystallising, hardening or sticky liquids.
Air-cooled shaft seal system	We recommend air-cooled shaft seal systems for applications involving extremely high temperatures. No conventional mechanical shaft seal can withstand liquid temperatures of up to 180 °C for any length of time.
	In order to ensure a low liquid temperature around the standard shaft seal, the pump is fitted with a special air-cooled shaft seal chamber. No separate cooling is required.
Double seal with pressure chamber	We recommend double seals with pressure chamber for applications involving poisonous or explosive liquids. It protects the surrounding environment and the people working in the vicinity of the pump. It consists of two seals mounted in a "back-to-back" arrangement inside a separate pressure seal chamber. As the pressure in the chamber is higher than the pump pressure, leakage is prevented. A dosing pump or a special pressure intensifier generates the seal chamber pressure.
CR MAGdrive	Magnetically driven pumps for industrial applications. Key applications are industrial processes involving the handling of aggressive, environmental, dangerous or volatile liquids, for example organic compounds and solvents.

Pumps

Variant	Description
Horizontally mounted pump	For safety or height reasons, certain applications, for instance on ships, require the pump to be mounted in the horizontal position. For easy installation, the pump is fitted with brackets that support motor and pump.
Low-temperature pump	Exposed to temperatures down to -40 °C, coolant pumps may require neck rings with a different diameter in order to prevent impeller drag.
High-speed pump up to 47 bar	For high-pressure applications, we offer a unique pump capable of generating a pressure of up to 47 bar. The pump is fitted with a high-speed motor, type MGE. The direction of rotation is the opposite of that of standard pumps, and the chamber stack is turned upside-down, as a result of which the pumped liquid flows in the opposite direction.
High-pressure pump up to 47 bar	For high-pressure applications, we offer a unique double pump system capable of generating a pressure of up to 47 bar.
Low-NPSH pump (improved suction)	We recommend the Low-NPSH pump for boiler-feed applications where cavitation may occur due to poor inlet conditions.
Pump with bearing flange	The bearing flange is suitable for applications where the inlet pressure is higher than the maximum pressure recommended. The bearing flange increases the life of motor bearings. We recommend this pump for standard motors.
Belt-driven pump	Belt-driven pumps designed to operate in places with limited space or where no electrical power is available.
Pump for pharmaceutical and biotechnological applications	CRNE pumps designed for applications requiring the sterilisation and CIP capability of pipes, valves and pumps. (CIP = Cleaning-In-Place.)

Connections and other variants

Variant	Description
Pipe connections	In addition to the wide range of standard flange connections, a 16 bar DIN standard clamping flange is available. Customised flanges are available according to specifications.
TriClamp connection	TriClamp connections are of a hygienic design with a sanitary coupling for use in the pharmaceutical and food industry.
Electropolished pump	To substantially reduce the risk of corrosion of the materials. For use in the pharmaceutical and food industry.

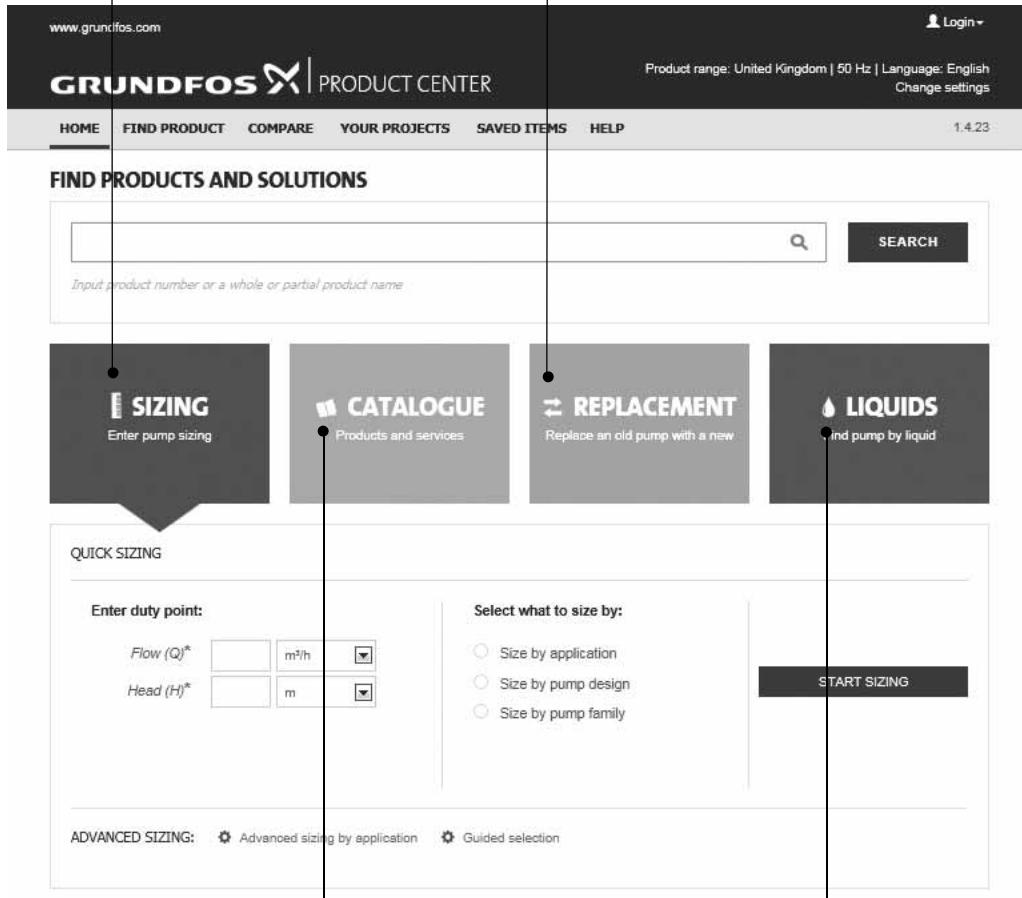
12. Grundfos Product Center

Online search and sizing tool to help you make the right choice.

<http://product-selection.grundfos.com>



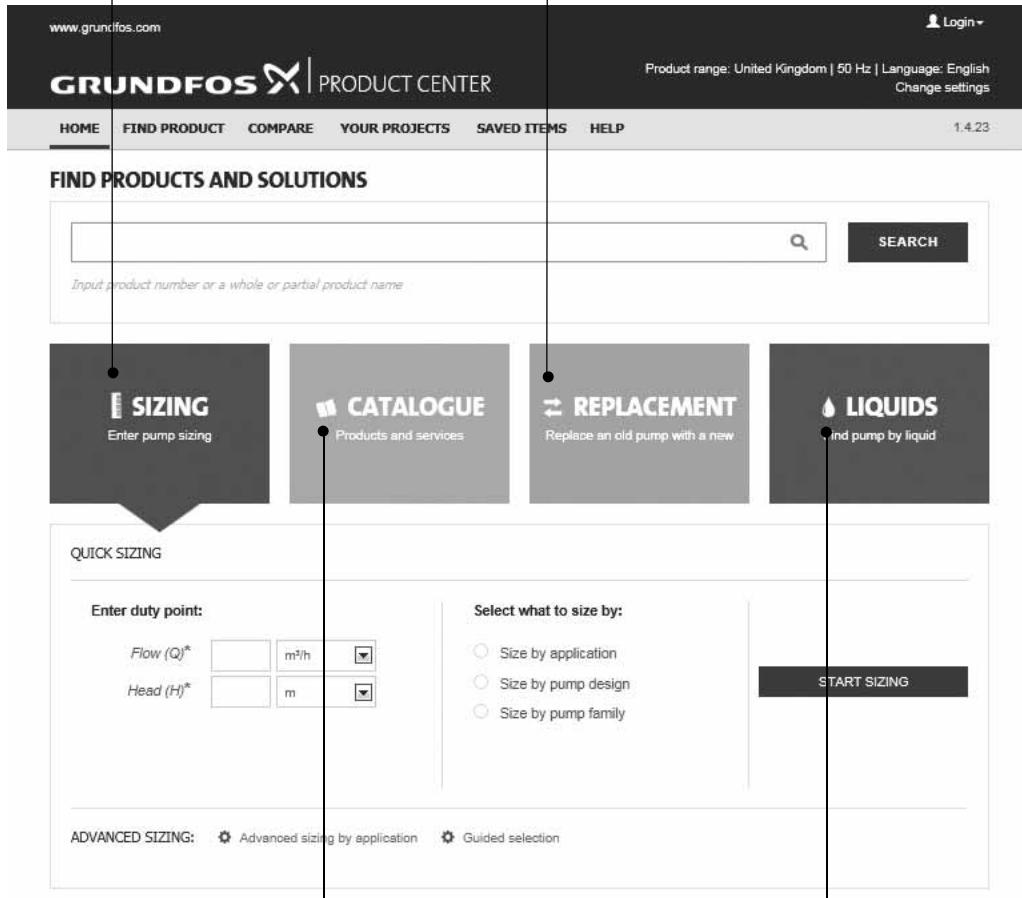
"SIZING" enables you to size a pump based on entered data and selection choices.



The screenshot shows the main navigation bar with links for HOME, FIND PRODUCT, COMPARE, YOUR PROJECTS, SAVED ITEMS, HELP, and a login link. Below the navigation is a search bar with placeholder text "Input product number or a whole or partial product name". Underneath the search bar are four large buttons: "SIZING" (with a pump icon), "CATALOGUE" (with a document icon), "REPLACEMENT" (with a pump icon), and "LIQUIDS" (with a liquid drop icon). The "SIZING" button is highlighted with a dark grey background and white text. To the left of the "SIZING" button is a callout box with the text "Enter pump sizing". To the right of the "SIZING" button is a callout box with the text "CATALOGUE gives you access to the Grundfos product catalogue." Below the buttons are sections for "QUICK SIZING" and "ADVANCED SIZING".

"REPLACEMENT" enables you to find a replacement product. Search results will include information on the following:

- the lowest purchase price
- the lowest energy consumption
- the lowest total life cycle cost.



The screenshot shows the same layout as the first one, but the "REPLACEMENT" button is highlighted with a dark grey background and white text. To the left of the "REPLACEMENT" button is a callout box with the text "Replace an old pump with a new". To the right of the "REPLACEMENT" button is a callout box with the text "LIQUIDS enables you to find pumps designed for aggressive, flammable or other special liquids."

All the information you need in one place

Performance curves, technical specifications, pictures, dimensional drawings, motor curves, wiring diagrams, spare parts, service kits, 3D drawings, documents, system parts. The Product Center displays any recent and saved items - including complete projects - right on the main page.

Downloads

On the product pages, you can download installation and operating instructions, data booklets, service instructions, etc. in PDF format.

Subject to alterations.

be think innovate

98423696	1016
ECM:	1194887

GRUNDFOS A/S
DK-8850 Bjerringbro, Denmark
Telephone: +45 87 50 14 00
www.grundfos.com

GRUNDFOS 

The name Grundfos, the Grundfos logo, and be think innovate are registered trademarks owned by Grundfos Holding A/S or Grundfos A/S, Denmark. All rights reserved worldwide.

© Copyright Grundfos Holding A/S