

GRUNDFOS VLC AND VLSC IN-LINE PUMP WITH CUE DRIVE FOR YOUR COMPLETE E-SOLUTIONS RANGE

Key Features and Benefits

- 16 steps easy start-up guide on the CUE drive
- Predefined settings and control modes on the CUE drive
- Isolation pads between the motor and CUE mounting plate to absorb vibration and heat transfer
- Vertical in-line mounting for floor space savings
- Axially split coupling enhances ease of service and alignment (VLSC)
- No flexible connectors or foundation grouting needed

For consulting engineers, visit **GrundfosExpress.com** for technical information. For Grundfos sales and distributors, visit **GrundfosExpressSuite.com**




VLSC PUMP


Technical Data

Grundfos VLC and VLSC	
Flow, Q	10 to 4100 gpm
Head, H	15 to 420 ft
Fluid temp.	10° to 275° F
Max. working pressure	175 psi*
HP range	3 to 125 hp
Speed	3600 and 1800 RPM
Discharge/Suction sizes	1.25 to 10 in.

* 250 psi rating available

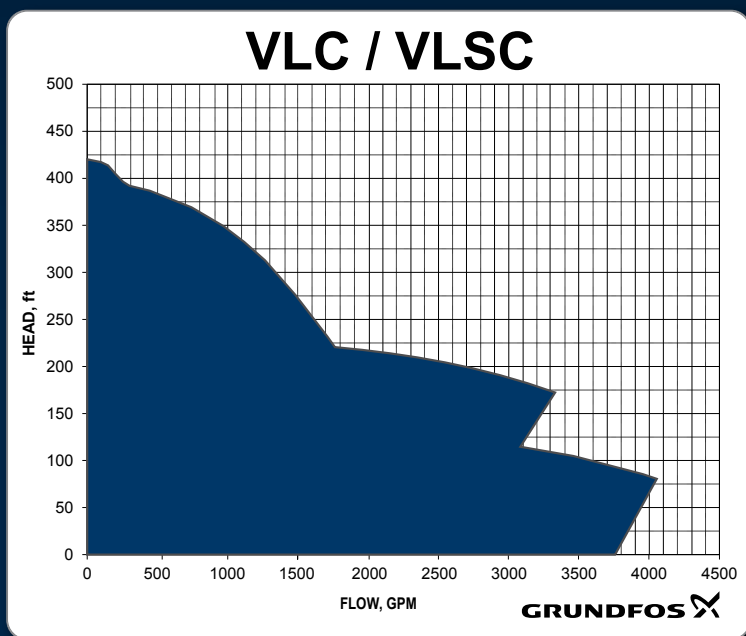

Visit grundfosexpressuite.com

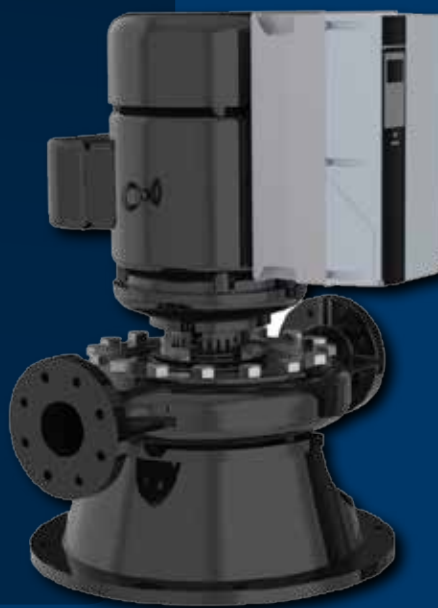

VLC PUMP

L-VLC-SL-01 09-14 (US)

GRUNDFOS CBS Inc.
 902 Koomey Road
 Brookshire, TX 77423
 Phone: (281) 994-2700
 Fax: (559) 347-2702

GRUNDFOS Canada
 2941 Brighton Road
 Oakville, Ontario
 L6H 6C9
 Phone: (905) 829-9533
 Fax: (905) 829-9512

GRUNDFOS Mexico
 Boulevard TLC No. 15
 Parque Industrial Stiva Aeropuerto
 C.P. 66600 Apodaca, N.L. Mexico
 Phone: 011-52-81-8144 4000
 Fax: 011-52-81-8144 4010

www.grundfos.us

The name Grundfos, the Grundfos logo, and be think innovate are registered trademarks owned by Grundfos Holding A/S or Grundfos A/S, Denmark. All rights reserved worldwide.

