


# Drum Pumps For Non-Corrosive Liquids

## ALUMINUM PUMP PACKAGE

### With Filter (Air)

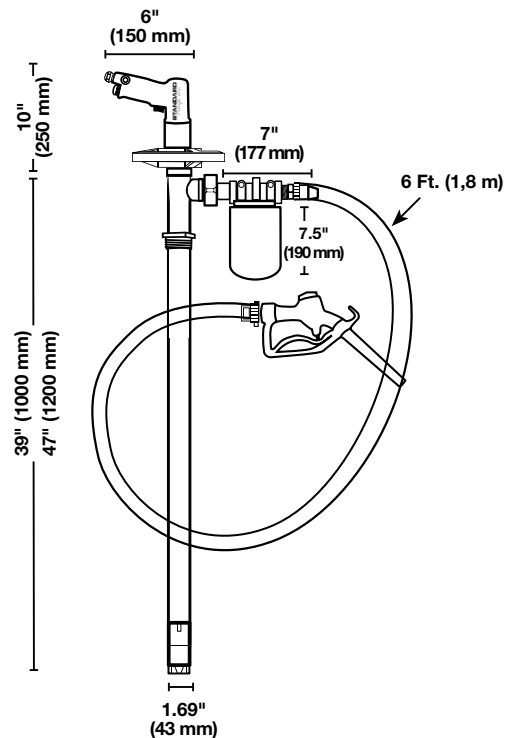

### Technical Specifications

**Package:** .....Motor, Pump, Hose, Storage Bracket  
Filter, Barrel Adapter & Hand Nozzle  
**Motor Type:** ..... \*Air 28 cfm @ 90 psi (13,2 @ 6,2 bar)  
**Air Inlet:**..... 1/4" NPTF  
**Min. Hose Size:**..... 3/8" (10 mm)  
**Pump Assembly:**.....Aluminum, Carbon, PTFE & SS316  
**Immersion Length:**..... 39" (1000 mm) or 47" (1200 mm)

**Discharge Hose:**..... PVC, 1" (25 mm) I.D., 6 ft. (1,8 m)  
**Hand Nozzle:** .....Aluminum, 1" (25 mm)  
**Discharge:**..... 1" (25 mm) Hose Barb  
**Pump Design:**..... Sealless / Centrifugal  
**Maximum Viscosity:** ..... 750 cps (mPas)  
**Maximum Specific Gravity:** ..... 1.8  
**Maximum Temp:** ..... 175° F (80° C)  
**Maximum Flow Rate:**..... 12 GPM (45 LPM)

### Package Numbers:

Drums:

Pkg P/N	Motor	Pump Tube	Filter
9476	SP-A2TL	SP-AL-HH-39	3 Micron
9477	SP-A2TL	SP-AL-HH-39	10 Micron
9478	SP-A2TL	SP-AL-HH-39	25 Micron

Tanks:

Pkg P/N	Motor	Pump Tube	Filter
9486	SP-A2TL	SP-AL-HH-47	3 Micron
9487	SP-A2TL	SP-AL-HH-47	10 Micron
9488	SP-A2TL	SP-AL-HH-47	25 Micron

\*Maximum Inlet Pressure 100 psi (6,6 bar)

**STANDARD**  
*Pumps, Inc.*

www.standardpump.com